

T H E B E T T E R F U T U R E



熊猫智慧水务有限公司
Panda Smart Water Co., Ltd.

上海熊猫机械（集团）有限公司
Shanghai Panda Machinery (Group) Co., Ltd

地址：上海市青浦区盈港东路6355号
Add: 6355 East Yinggang Rd, Qingpu District, Shanghai, China

网址：<https://www.panda.sh.cn>
Website: <https://www.panda.sh.cn>

电话：021-59863888
Tel: 021-59863888

售后：400-8851828
After sales service: 400-8851828



本公司对产品具有改进权，如有改动，恕不通知

版次：2024年7月第一版

印次：2024年7月第一次

Our company reserves the right to improve our products
and will not notify you of any changes.

Edition: First edition in July 2024


Printing: First edition in July 2024

Pandas make water supply **safer and easier**



上海熊猫机械集团


SHANGHAI PANDA MACHINE GROUP

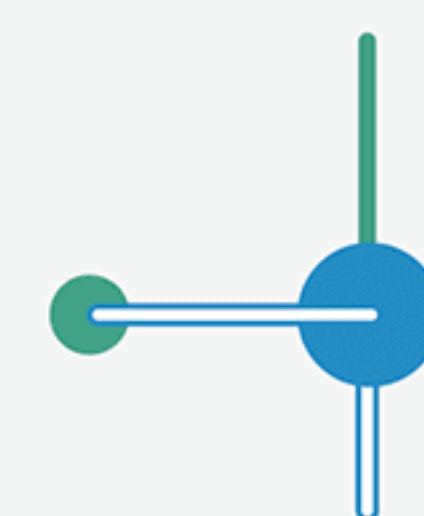

PANDA
SL
Vertical Single Stage Centrifugal Pump

熊猫SL(Z)系列
立式单级离心泵

 PANDA 熊猫

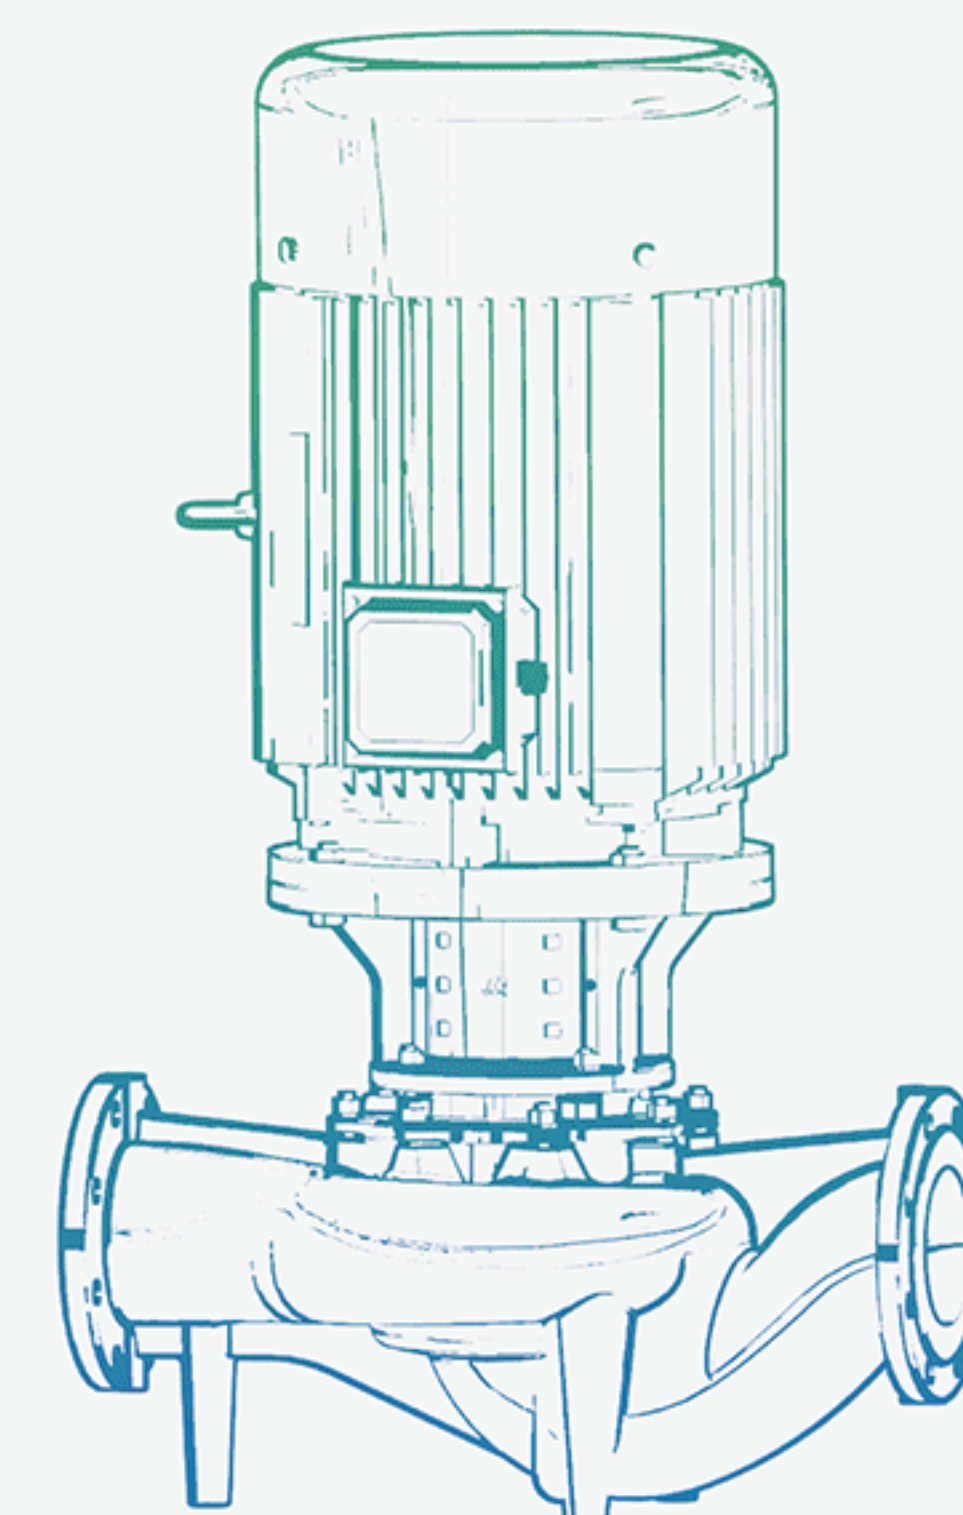

PANDA 熊猫

引领中国智慧水务

Industry leader

THE BETTER FUTURE



熊猫SL(Z)系列 Panda SL(Z) Series

立式单级离心泵 Vertical Single Stage Centrifugal Pump

CONTENT 目录

● 公司介绍 Company Profile	01-04	● 性能范围 Performance range	12
集团简介 Group Profile	01	SL(Z) 2极 SL(Z) 2 Class	
集团文化 Group Culture	02	SL(Z) 4极 SL(Z) 4 Class	
集团优势 Group Advantage	02		
发展历程 Group History	03-04	● 性能曲线与技术数据 Performance Curves and Technical Data	13-89
● 产品概述 Product Overview	05-06	● 附录 Appendix	90-110
● 产品范围 Product Range	07-11	SL 系列安装尺寸图 2级 SL Series Mounting Dimension Drawing Level 2	90
型号含义 Model Meaning	07	SL (Z) 系列安装尺寸图 4级 SL (Z) Series Mounting Dimension Drawing Level 4	101-102
泵结构 Pump Construction	08	● 服务热线 Service Hotline	111-112
最小进口压力 Minimum Inlet Pressure	09		
典型应用 Typical Applications	09		
性能参数 Performance Parameters	09		
产品剖面图 Sectional Drawing	10		
结构图 Structural Drawings	11		



集团简介 / Group Introduction

我们熊猫总部坐落于大虹桥经济圈,距离虹桥机场
仅需15分钟车程。

我们熊猫是国内领先的智慧水务水循环利用软硬集
成系统解决方案提供商,经过三十年发展,利用我们
熊猫软硬件优势,自主研发零能耗w无机膜技术等,
全系列产品支持一键扫码上线,自动上传熊猫智联
平台。

我们熊猫目前是国内水务软件、装备、传感、自动化、
陶瓷膜深度融合产业链最齐全的企业之一。为响应
国家水务政策,保障广大居民喝上优质水高品质水
做贡献。

Shanghai Panda Machinery(Group) Co.,Ltd is a high-tech
enterprise in Shanghai,

No.1 market shares of building pumps in China. President
Xuecong, Chi founded the company in 1993.

Through 30 years development, We have been a leading
group including from researching, manufacturing pumps,
complete equipments, water meters, flow meters to intelli-
gent management platform which is consist of raw water
monitoring, water supply control, DMA, pipe GIS, Second-
ary water supply and Billing. We have been providing
advanced smart watering solutions for thousands of water
supply companies.

Also we take proud of that our high-tech products are
servicing water supply and drainage, municipal infrastruc-
ture, HAVC, chemicals, electrics, mining, thermal energy
efficiency monitoring fields etc.

1155+ 标准化软件模块 Standardized Software Modules
8868+ 标准化自控模块 Standardized Self-Control Module
1727+ 传感计量设备 Sensing and Measuring Equipment
3000+ 集成设备 Integrated Devices

集团文化/ Corporate Culture

熊猫价值观 / 感恩、创新、效率

Panda Values: *Thanksgiving, Innovation and Efficiency*

熊猫使命 / 引领中国智慧水务

Panda Mission: *Leading China's Wisdom Water*

熊猫战略 / 技术领先, 服务领先

Panda Strategy: *Leading technology ,Leading service*

熊猫口号 / 明天会更好!

Panda Slogan: *Tomorrow will be better!*

熊猫个人目标 / 超越自我, 创造奇迹

Panda Personal Goal: *Excel yourself and work miracles*

熊猫愿景 / 打造百年熊猫


Panda Vision: *Building a Century Panda*

集团优势/ Group Advantage





集团发展历程 / Development History

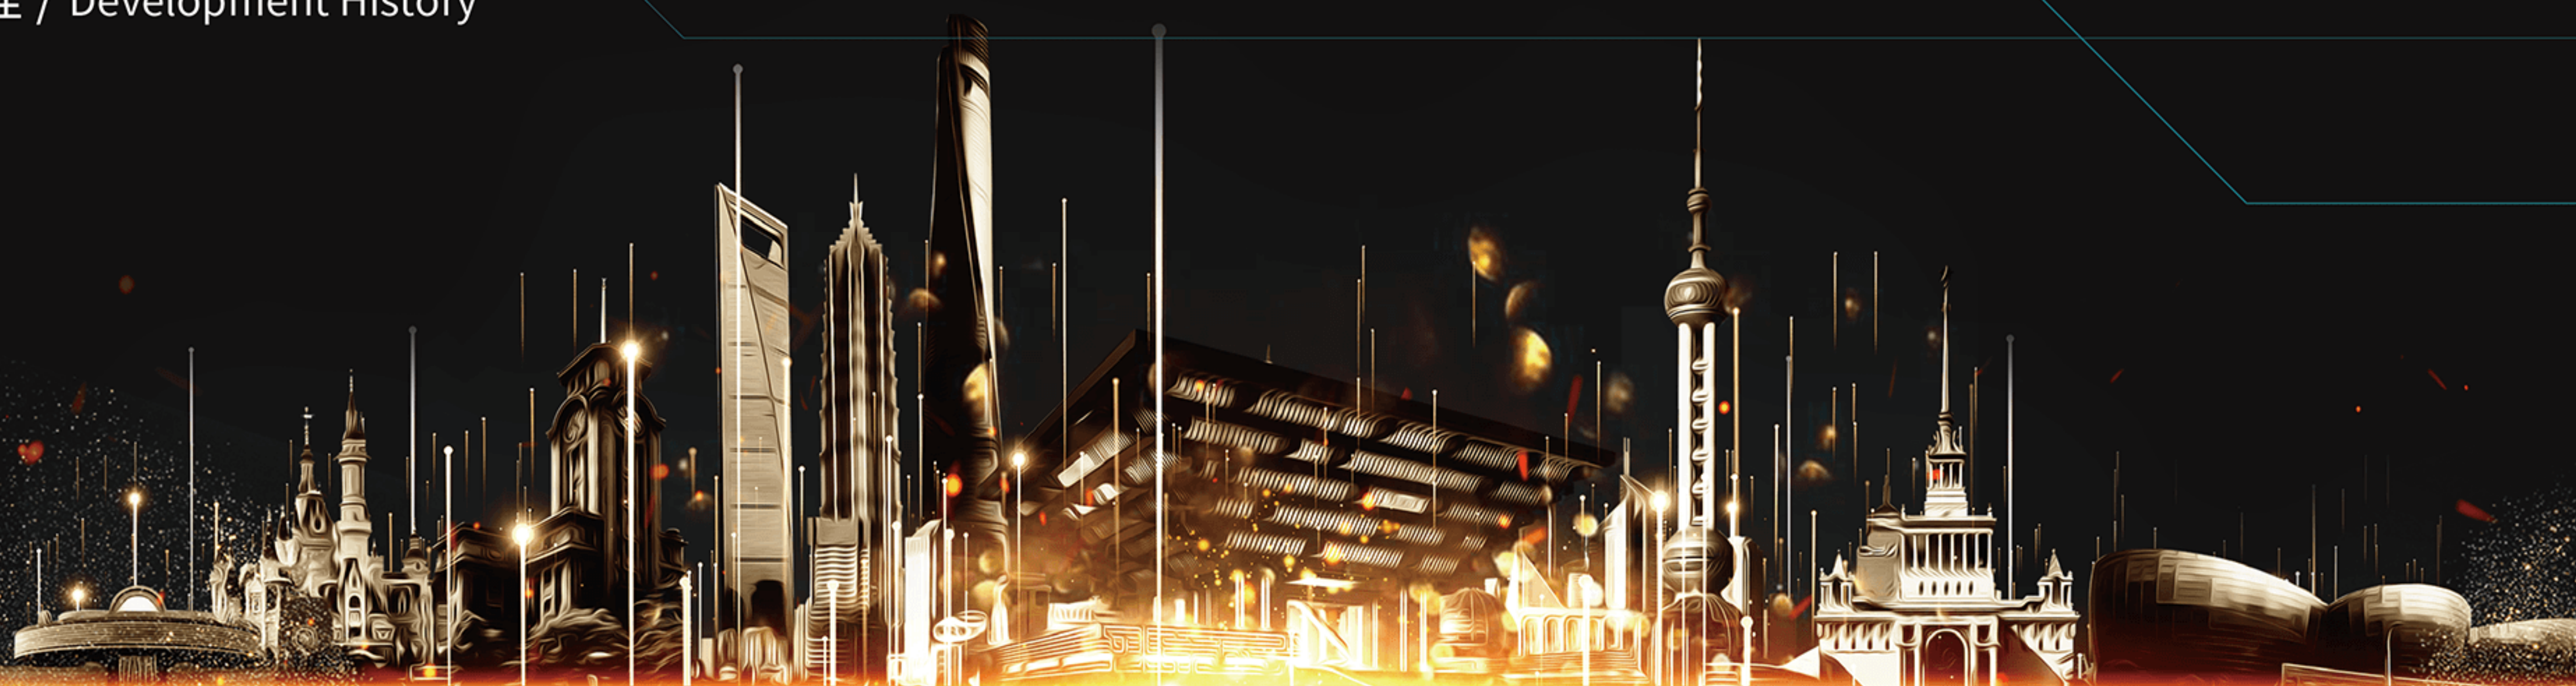

产品概述 / Product Overview

熊猫SL(Z)系列立式单级离心泵采用三维CFD仿真设计,水力效率 $MEI \geq 0.7$,其高效的性能、质量及耐用性而被看作行业标杆。

Panda SL(Z) series vertical single-stage centrifugal pumps are designed by three-dimensional CFD simulation, with hydraulic efficiency $MEI \geq 0.7$, which is regarded as the industry benchmark for its efficient performance, quality and durability.

其主要特点如下 The main features are as follows

- 全寿命周期成本低
- 高效率以减少运行成本
- 优化的平衡孔设计减小水力轴向力,延长水泵的寿命
- 补偿式双蜗壳设计可以减小水力径向力,使得轴的挠度最小化,延长轴承及密封的寿命
- 卓越的设计可减少维护成本及维护停工时间
- 上拉式结构易于检修,维护方便
- 宽广的型谱范围以满足更高的应用需求
- 运行更安静
- Low total life cycle costs
- High efficiency to reduce operating costs
- Optimized balance hole design reduces hydraulic axial forces and extends pump life
- Compensated double-worm housing design reduces hydraulic radial forces, minimizes shaft disturbances
- Superior design reduces maintenance costs and downtime.
- Pull-up construction for easy access and maintenance
- Wide range of models to meet the needs of higher applications
- Quieter operation

标准型的熊猫SL系列立式单级离心泵以先进的结构特点确保其最优的性能和可靠性。泵体及叶轮的创新设计确保水泵最高的运转效率,同时泵具有宽广的高效区,甚至在偏离设计工况下泵也能良好地运行。

The standard Panda SL series of vertical single-stage centrifugal pumps is characterized by advanced construction features that ensure optimum performance and reliability. The innovative design of the pump body and impeller ensures the highest possible operating efficiency, while the pump has a wide high efficiency zone and operates well even at deviations from the designed operating conditions.



产品范围 / Product Scope

● 型号含义 Model Description

SL(Z)80-200-45-2-B-P-A-1

机封代码:1(国产:石墨-碳化硅)、2(进口:石墨-碳化硅)

Seal Code: 1 (Domestic: Graphite-Silicon carbide), 2 (Import: Graphite-Silicon carbide)

材质代码, 见表

Material Code, Attached Sheet

B(不带底座)、P(带底座)、X(特殊型号)

B (Without Base), P (With Base), X (Customized)

B(熊猫电机IE3能效), E(卧龙电机WE3型号-IE3能效)

B (Panda Motor IE3 Energy Efficiency), E (Wolong Motor WE3 TYPE-IE3 Energy efficiency)

电机极数

Motor Poles

电机功率kW

Motor Power kW

叶轮名义直径mm

Impeller nominal diameter mm

进出口直径mm

Inlet and outlet diameter mm

SL系列泵轴直接安装在电机轴上, SLZ系列采用泵与电机共轴

SL Series pump shaft is directly mounted on the motor shaft, SLZ series adopts the coaxial pump and motor

材质代码	Material Code	A
泵体/泵盖	Pump body/pump cover	HT250
轴	Axis	20Cr13
叶轮	Impeller	304

● 泵结构 Pump Structure

· 泵为非自吸、单级单吸立式, 管道式连接, 结构紧凑, 泵体底部跟底座固定。

· The pump is the compact in structure with non-self-priming, single-stage single-suction vertical and pipe connection. The bottom of the pump body is fixed to the base.

· 采用标准型耐磨机械密封。

· Adopting the standard wear-resistant mechanical seal.

· 全封闭、风冷 IEC 高效电机。

· With fully enclosed and air-cooled IEC high-efficiency motor.

· 泵轴与电机直接相连, 传动效率高。

· The pump shaft is directly connected to the motor, with high transmission efficiency.

· 泵体进出口法兰符合 GB/T17241.6 (ISO7005-2) 标准, 压力等级 PN16。

· The inlet and outlet flanges of the pump body should be based on the GB/T17241.6 (ISO7005-2) standard, and the pressure level is PN16.



● 最小进口压力 Minimum Inlet Pressure

最小进口压力取决于NPSH+0.5的安全余量+汽化压力。
The minimum inlet pressure is determined by NPSH + 0.5 safety margin + vapor pressure.

如果下列情况发生，重新计算入口压力：
Recalculate the inlet pressure if the following conditions occur:

- 液体温度较高
· High liquid temperature
- 流量超过最大允许使用值时
· When the flow rate exceeds the maximum allowed value
- 吸程较大或进口管路较长
· The suction distance is large or the inlet pipeline is long
- 系统压力太小
· System pressure is too low
- 进口条件差、工作压力低
· Poor import conditions and low working pressure

● 典型应用 Application

- 供水系统
· Water supply system
- 供热、空调系统
· Heating and air conditioning systems
- 增压供水、恒压供水
· Boosted water supply, constant pressure water supply
- 消防喷淋系统
· Fire sprinkler system
- 灌溉、畜牧使用
· Irrigation and livestock use
- 工业冷却、加热循环系统
· Industrial cooling and heating circulation system
- 工业输送、排放系统
· Industrial conveying and discharge system

● 性能参数 Technology Specification

- 最大流量：1000m³
· Max Flow: 1000m³
- 最高扬程：160m
· Max Lift: 160m
- 最大工作压力：16bar
· Max Working Pressure: 16bar
- 最大进口压力：6bar
· Max Entrance Pressure: 6bar
- 最大功率：200kW
· Max Power: 200kW
- 介质温度：-20℃~120℃
· Medium Temperature: -20℃~120℃
- 进出口直径：DN32~DN200
· Inlet and Outlet Diameter: DN32~DN200

● 产品剖面图 Product Section Drawing

*注：


△ 为材料

◇ 为对照代号/AISI

*Remark:


△ For Material

◇ For Code/AISI

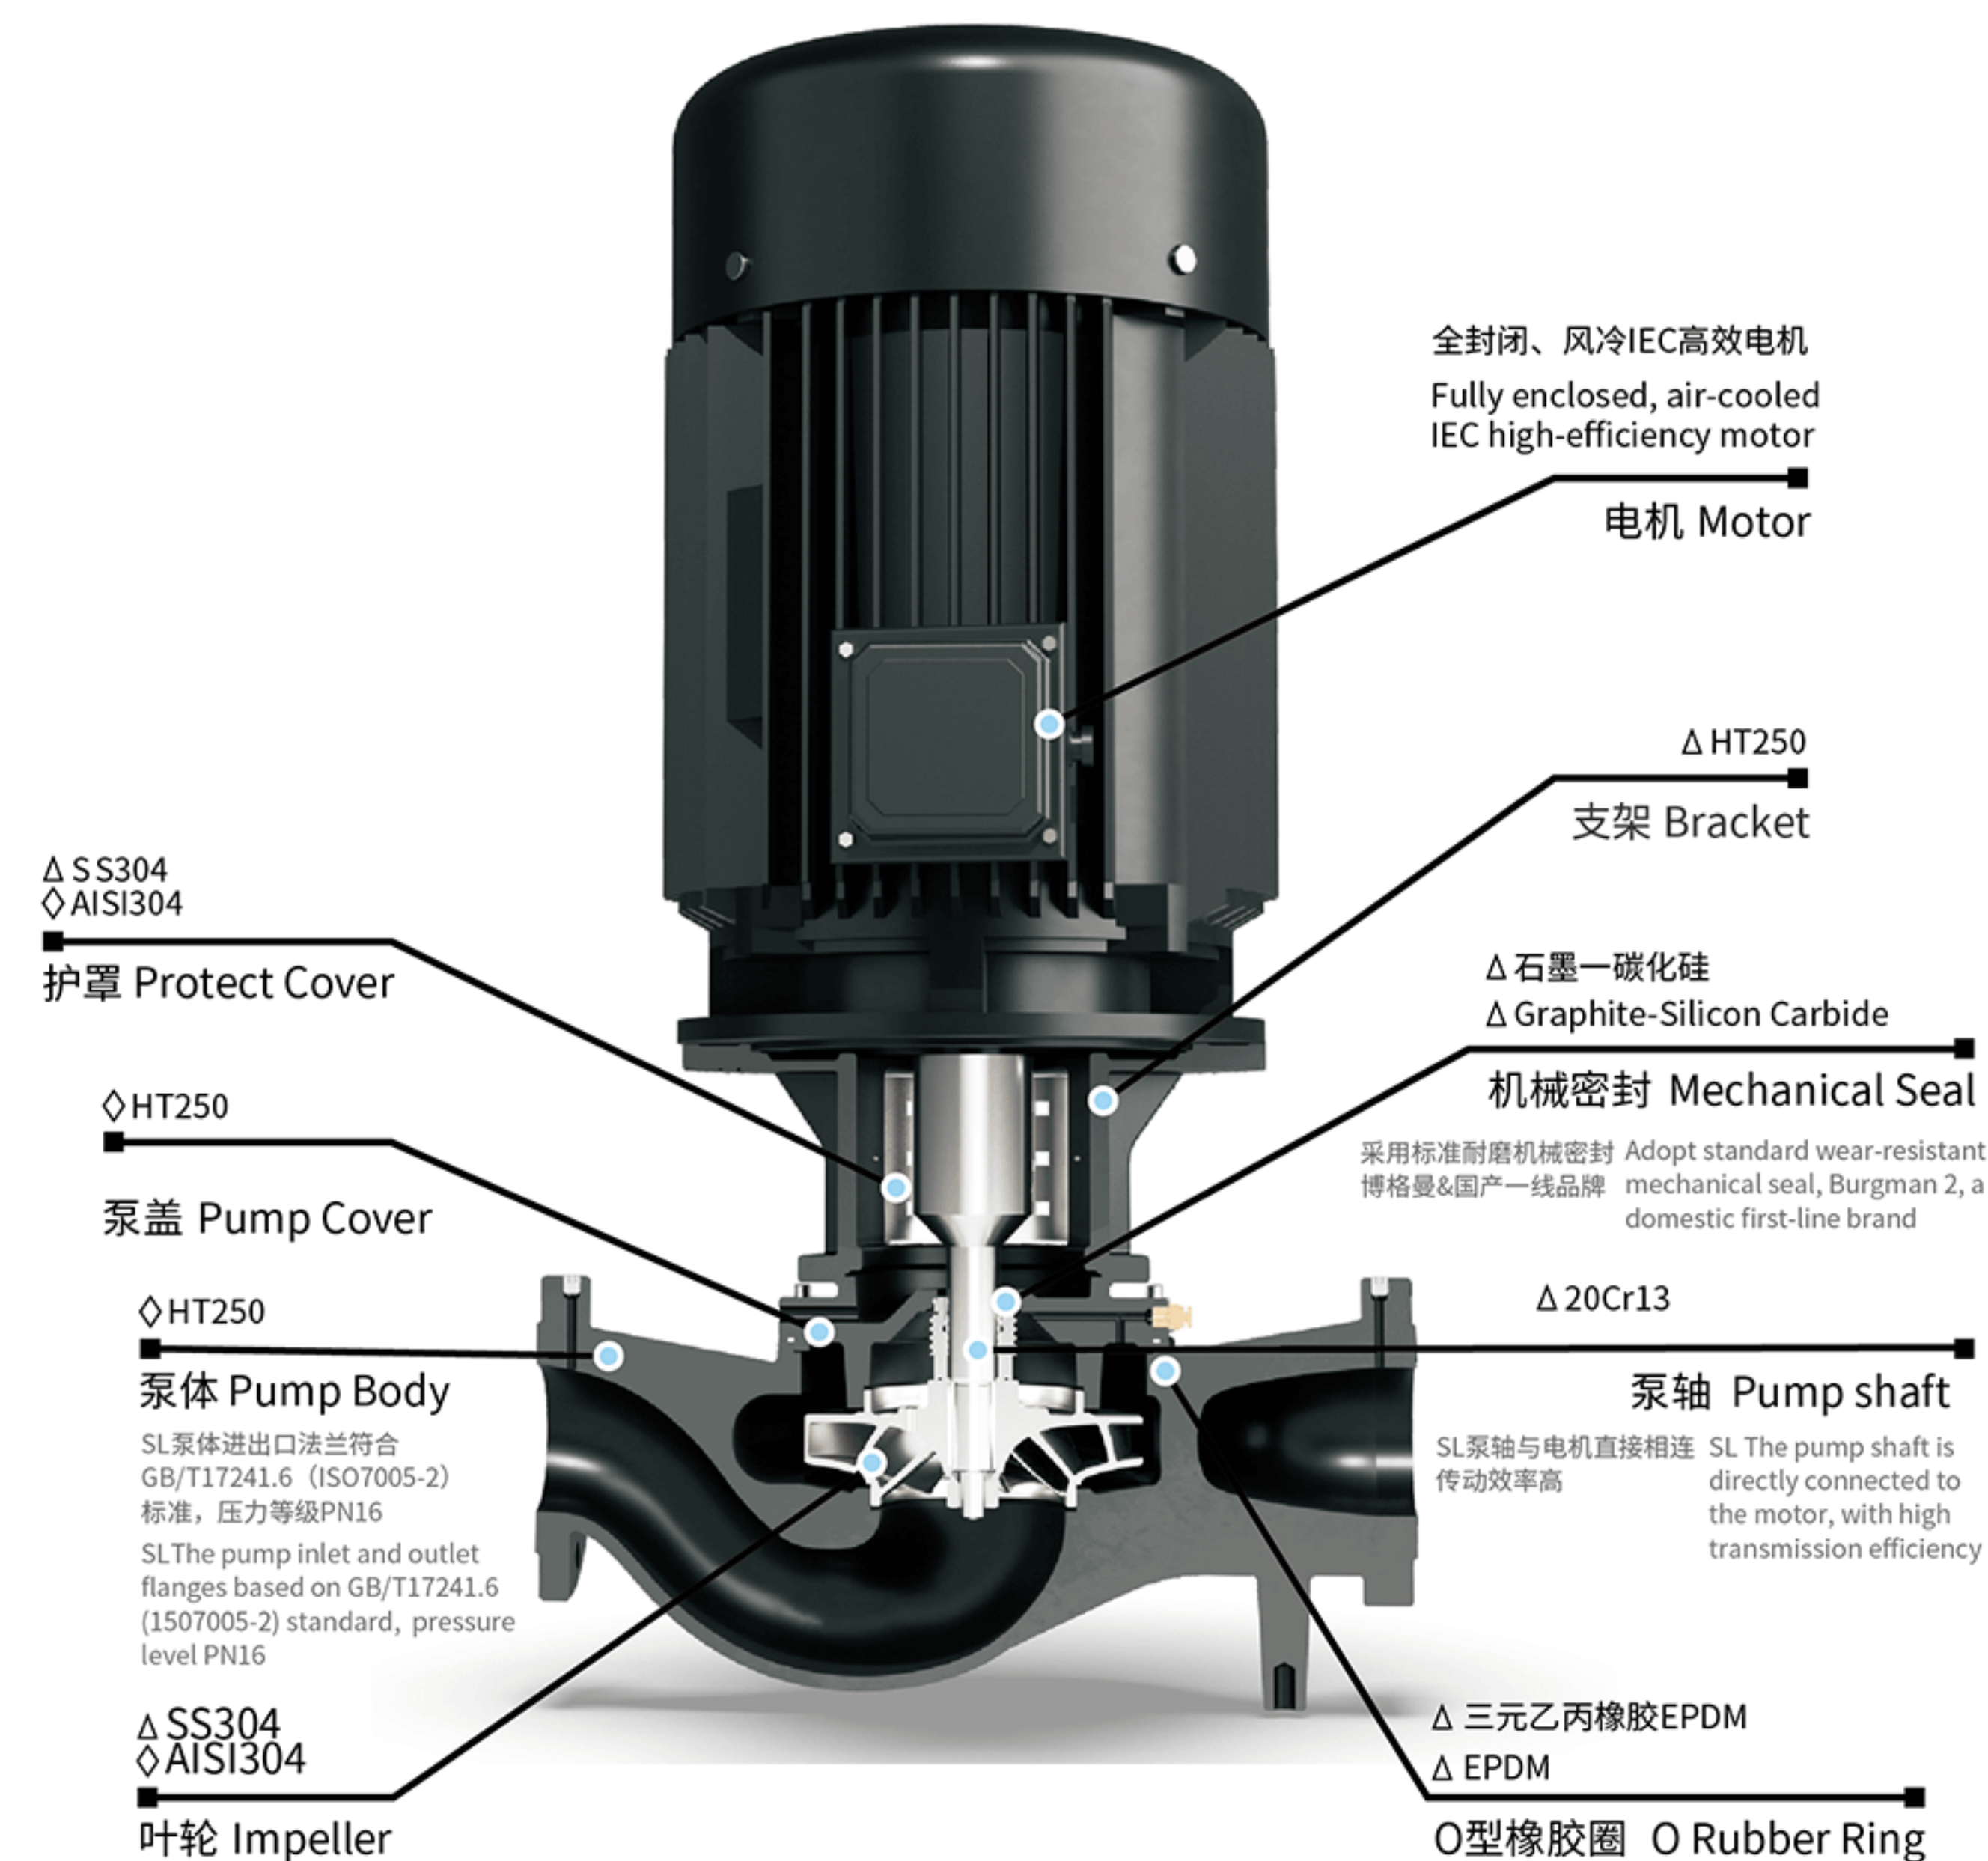

● 结构图 Structure Drawing


● SLZ结构图 SLZ Structure Drawing

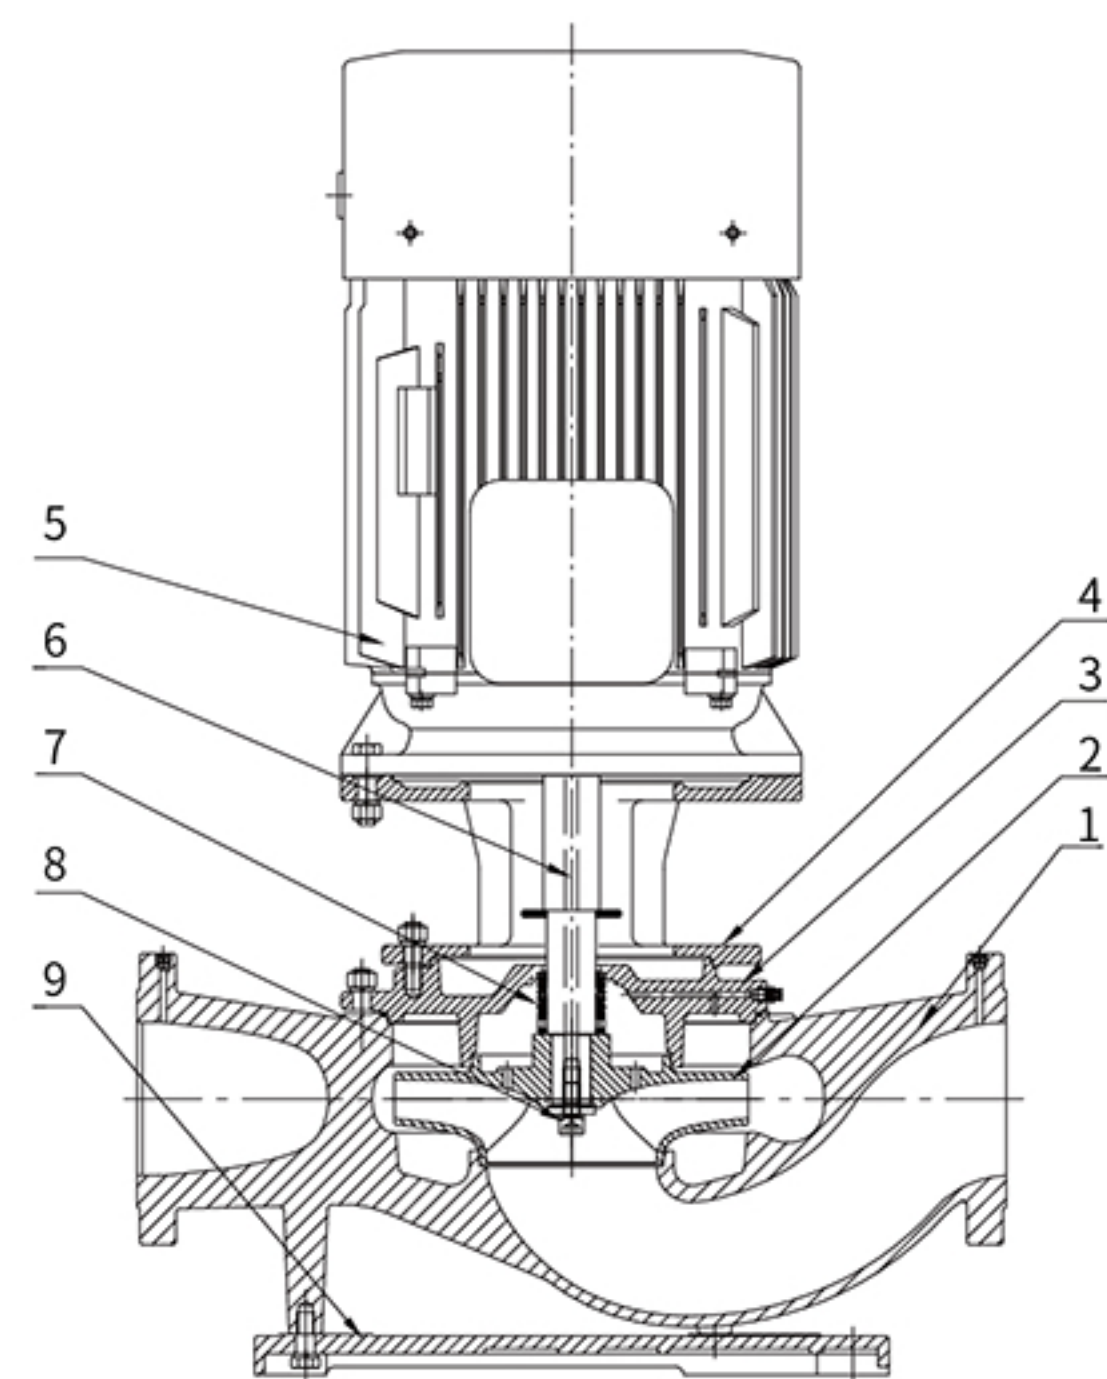


No.	零件名称	Spare Parts
1	泵体	Pump Body
2	叶轮	Impeller
3	泵盖	Pump Cover
4	支架	Bracket
5	电机	Motor
6	轴	axis
7	机械密封	Mechanical seal
8	轴冷部件	Shaft Cooling Components
9	底座	Base

SL(Z) 性能范围 / Performance Range


SL (Z) 2极 SL (Z) 2-Pole

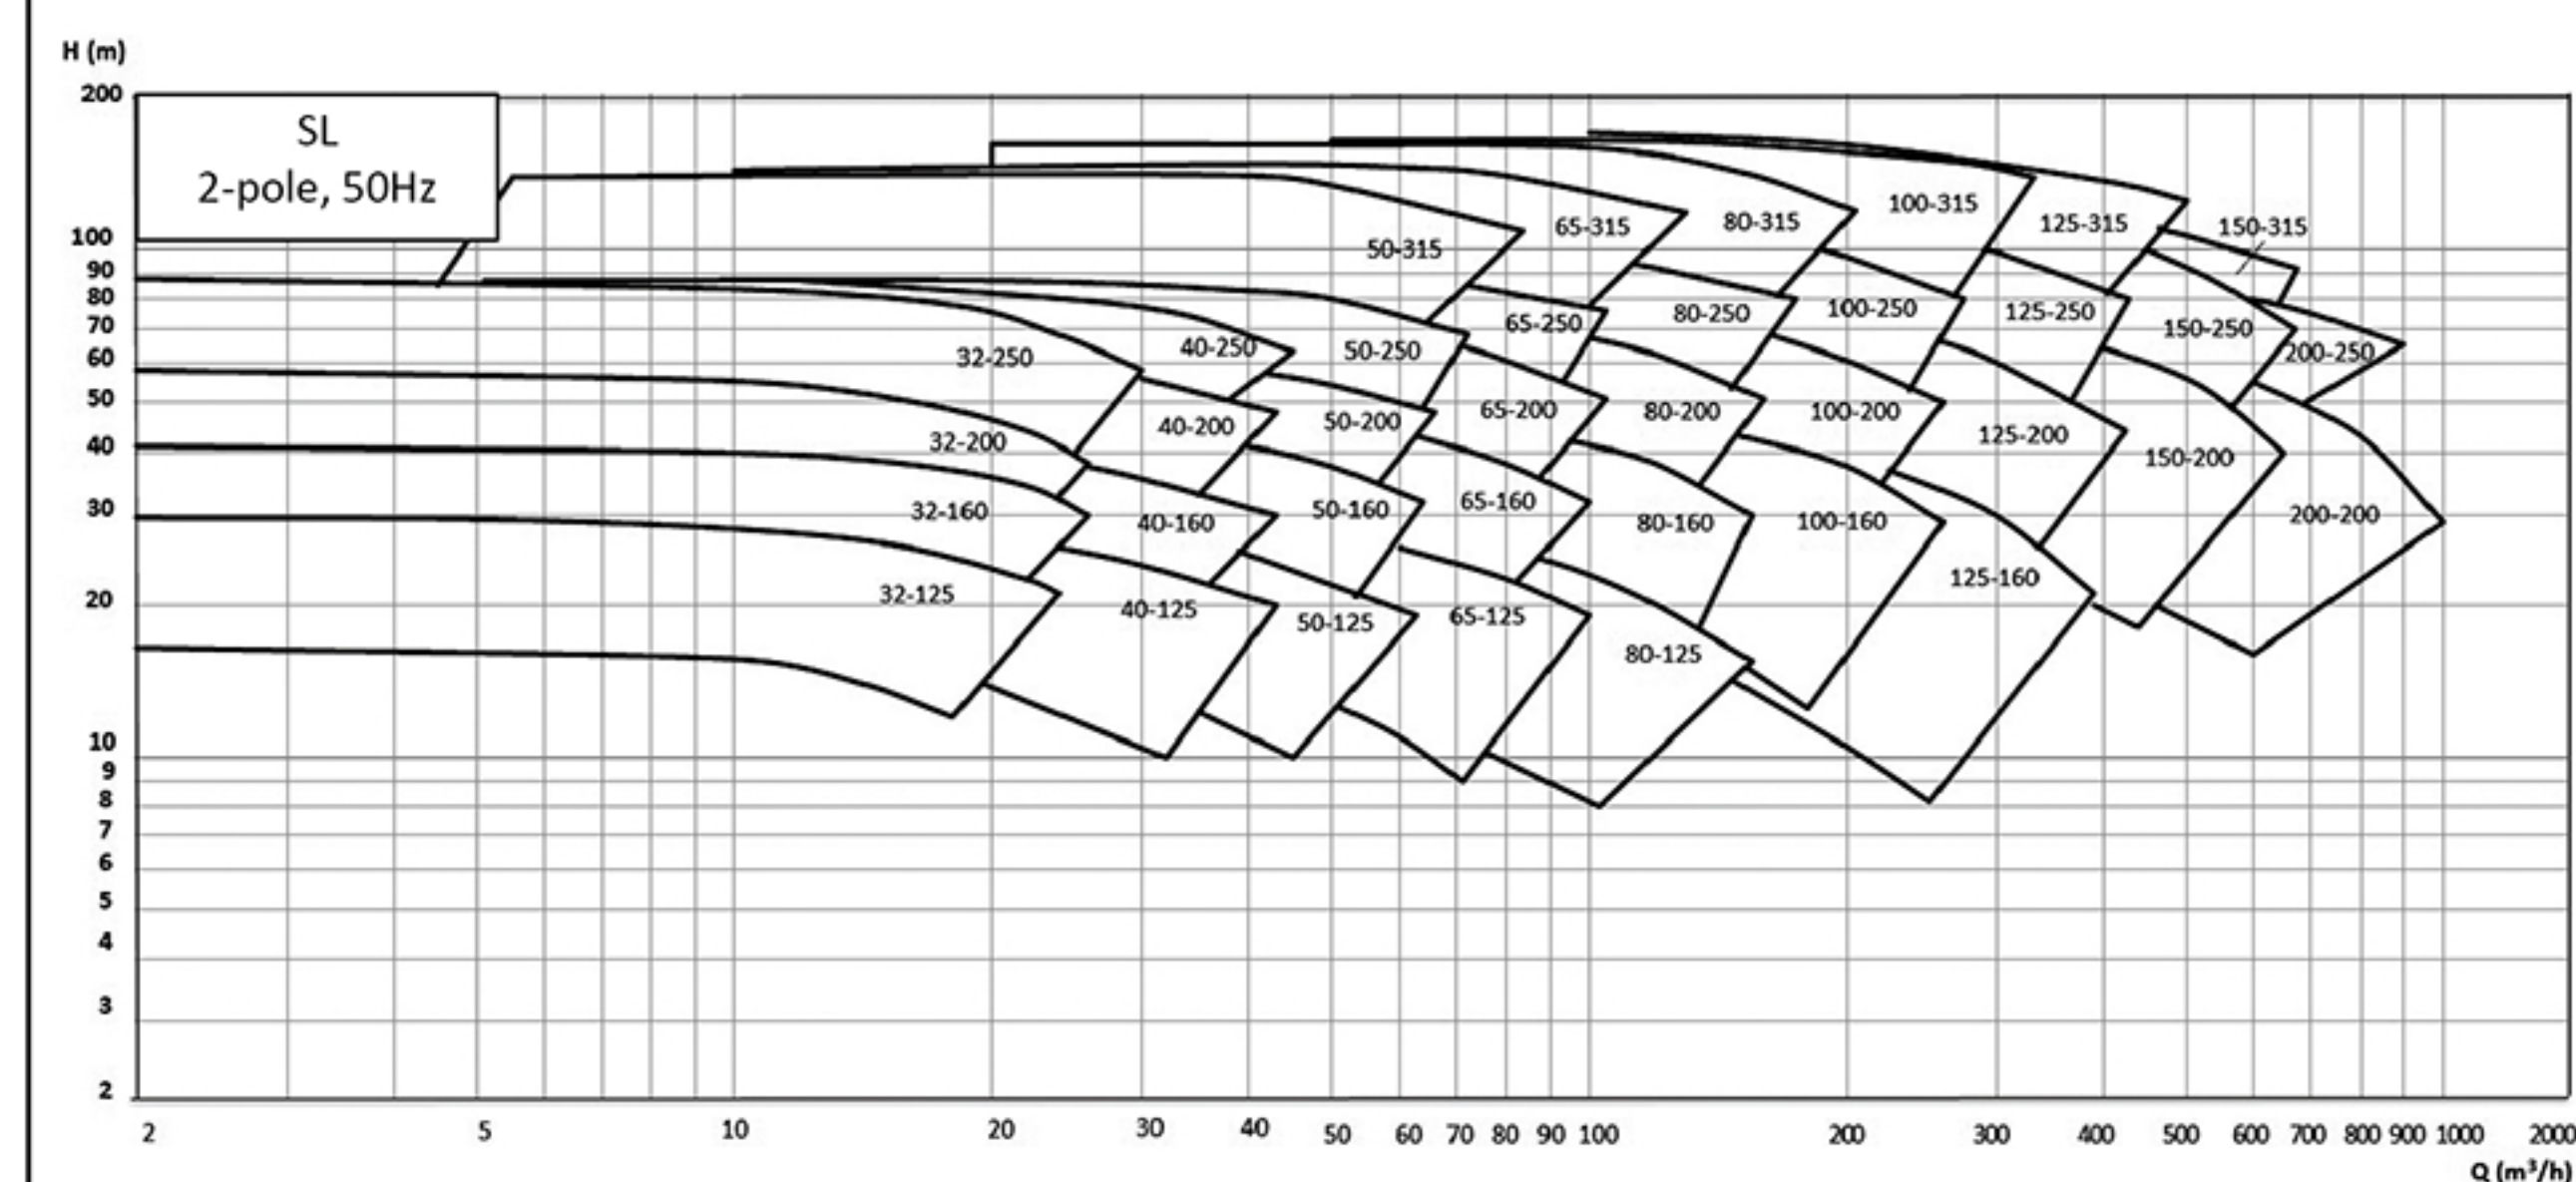

SL (Z) 4极 SL (Z) 4-Pole

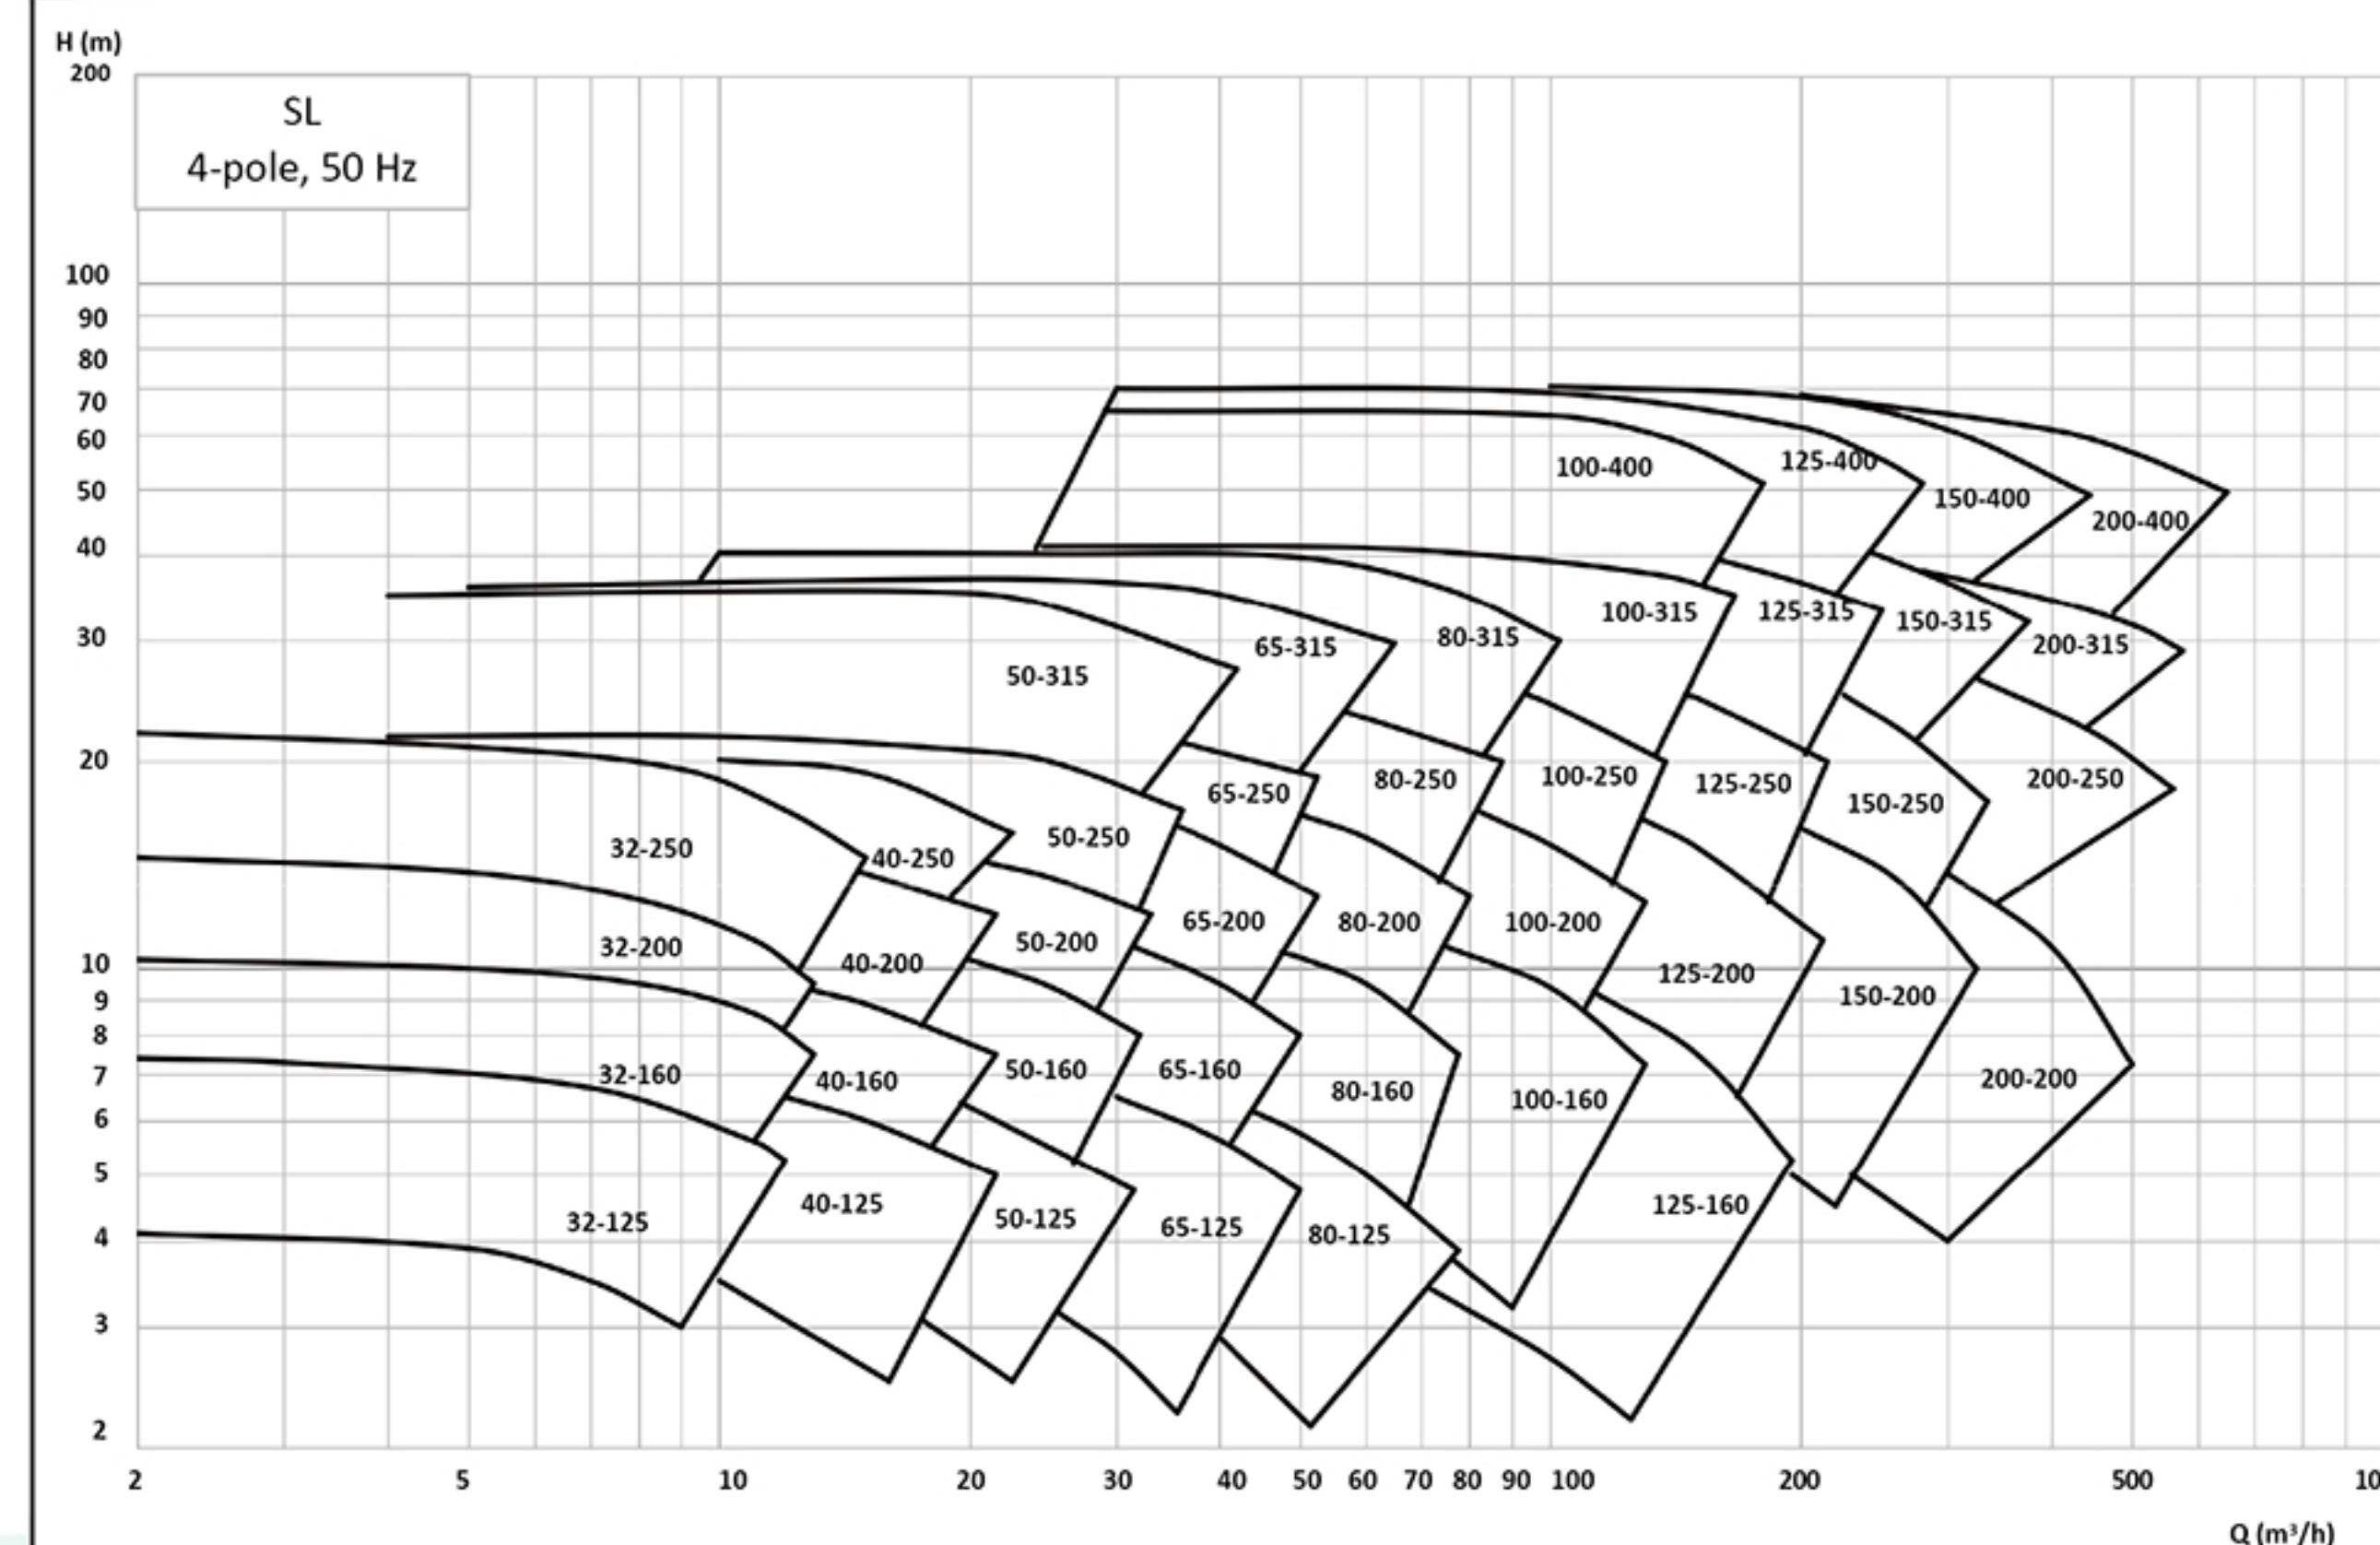


● SL结构图 SL Structure Drawing

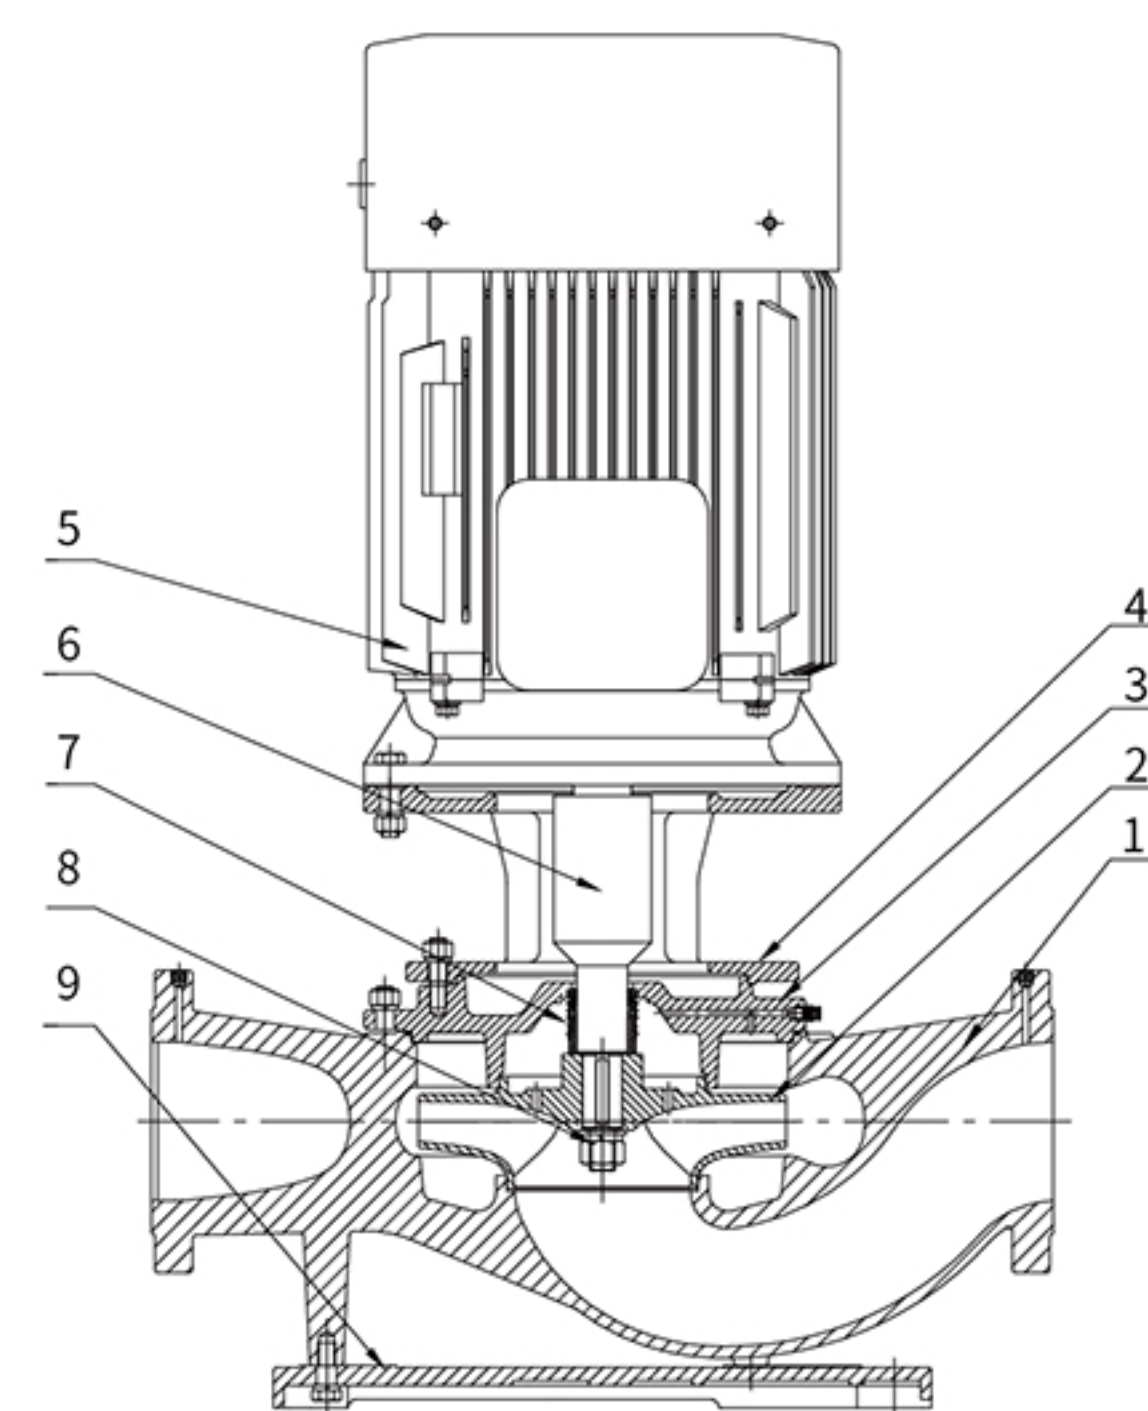

No.	零件名称	Spare Parts
1	泵体	Pump Body
2	叶轮	Impeller
3	泵盖	Pump Cover
4	支架	Bracket
5	电机	Motor
6	轴	axis
7	机械密封	Mechanical seal
8	叶轮螺母	Impeller nut
9	底座	Base

SL32-125


性能曲线和技术数据 Performance Curves and Technical Data

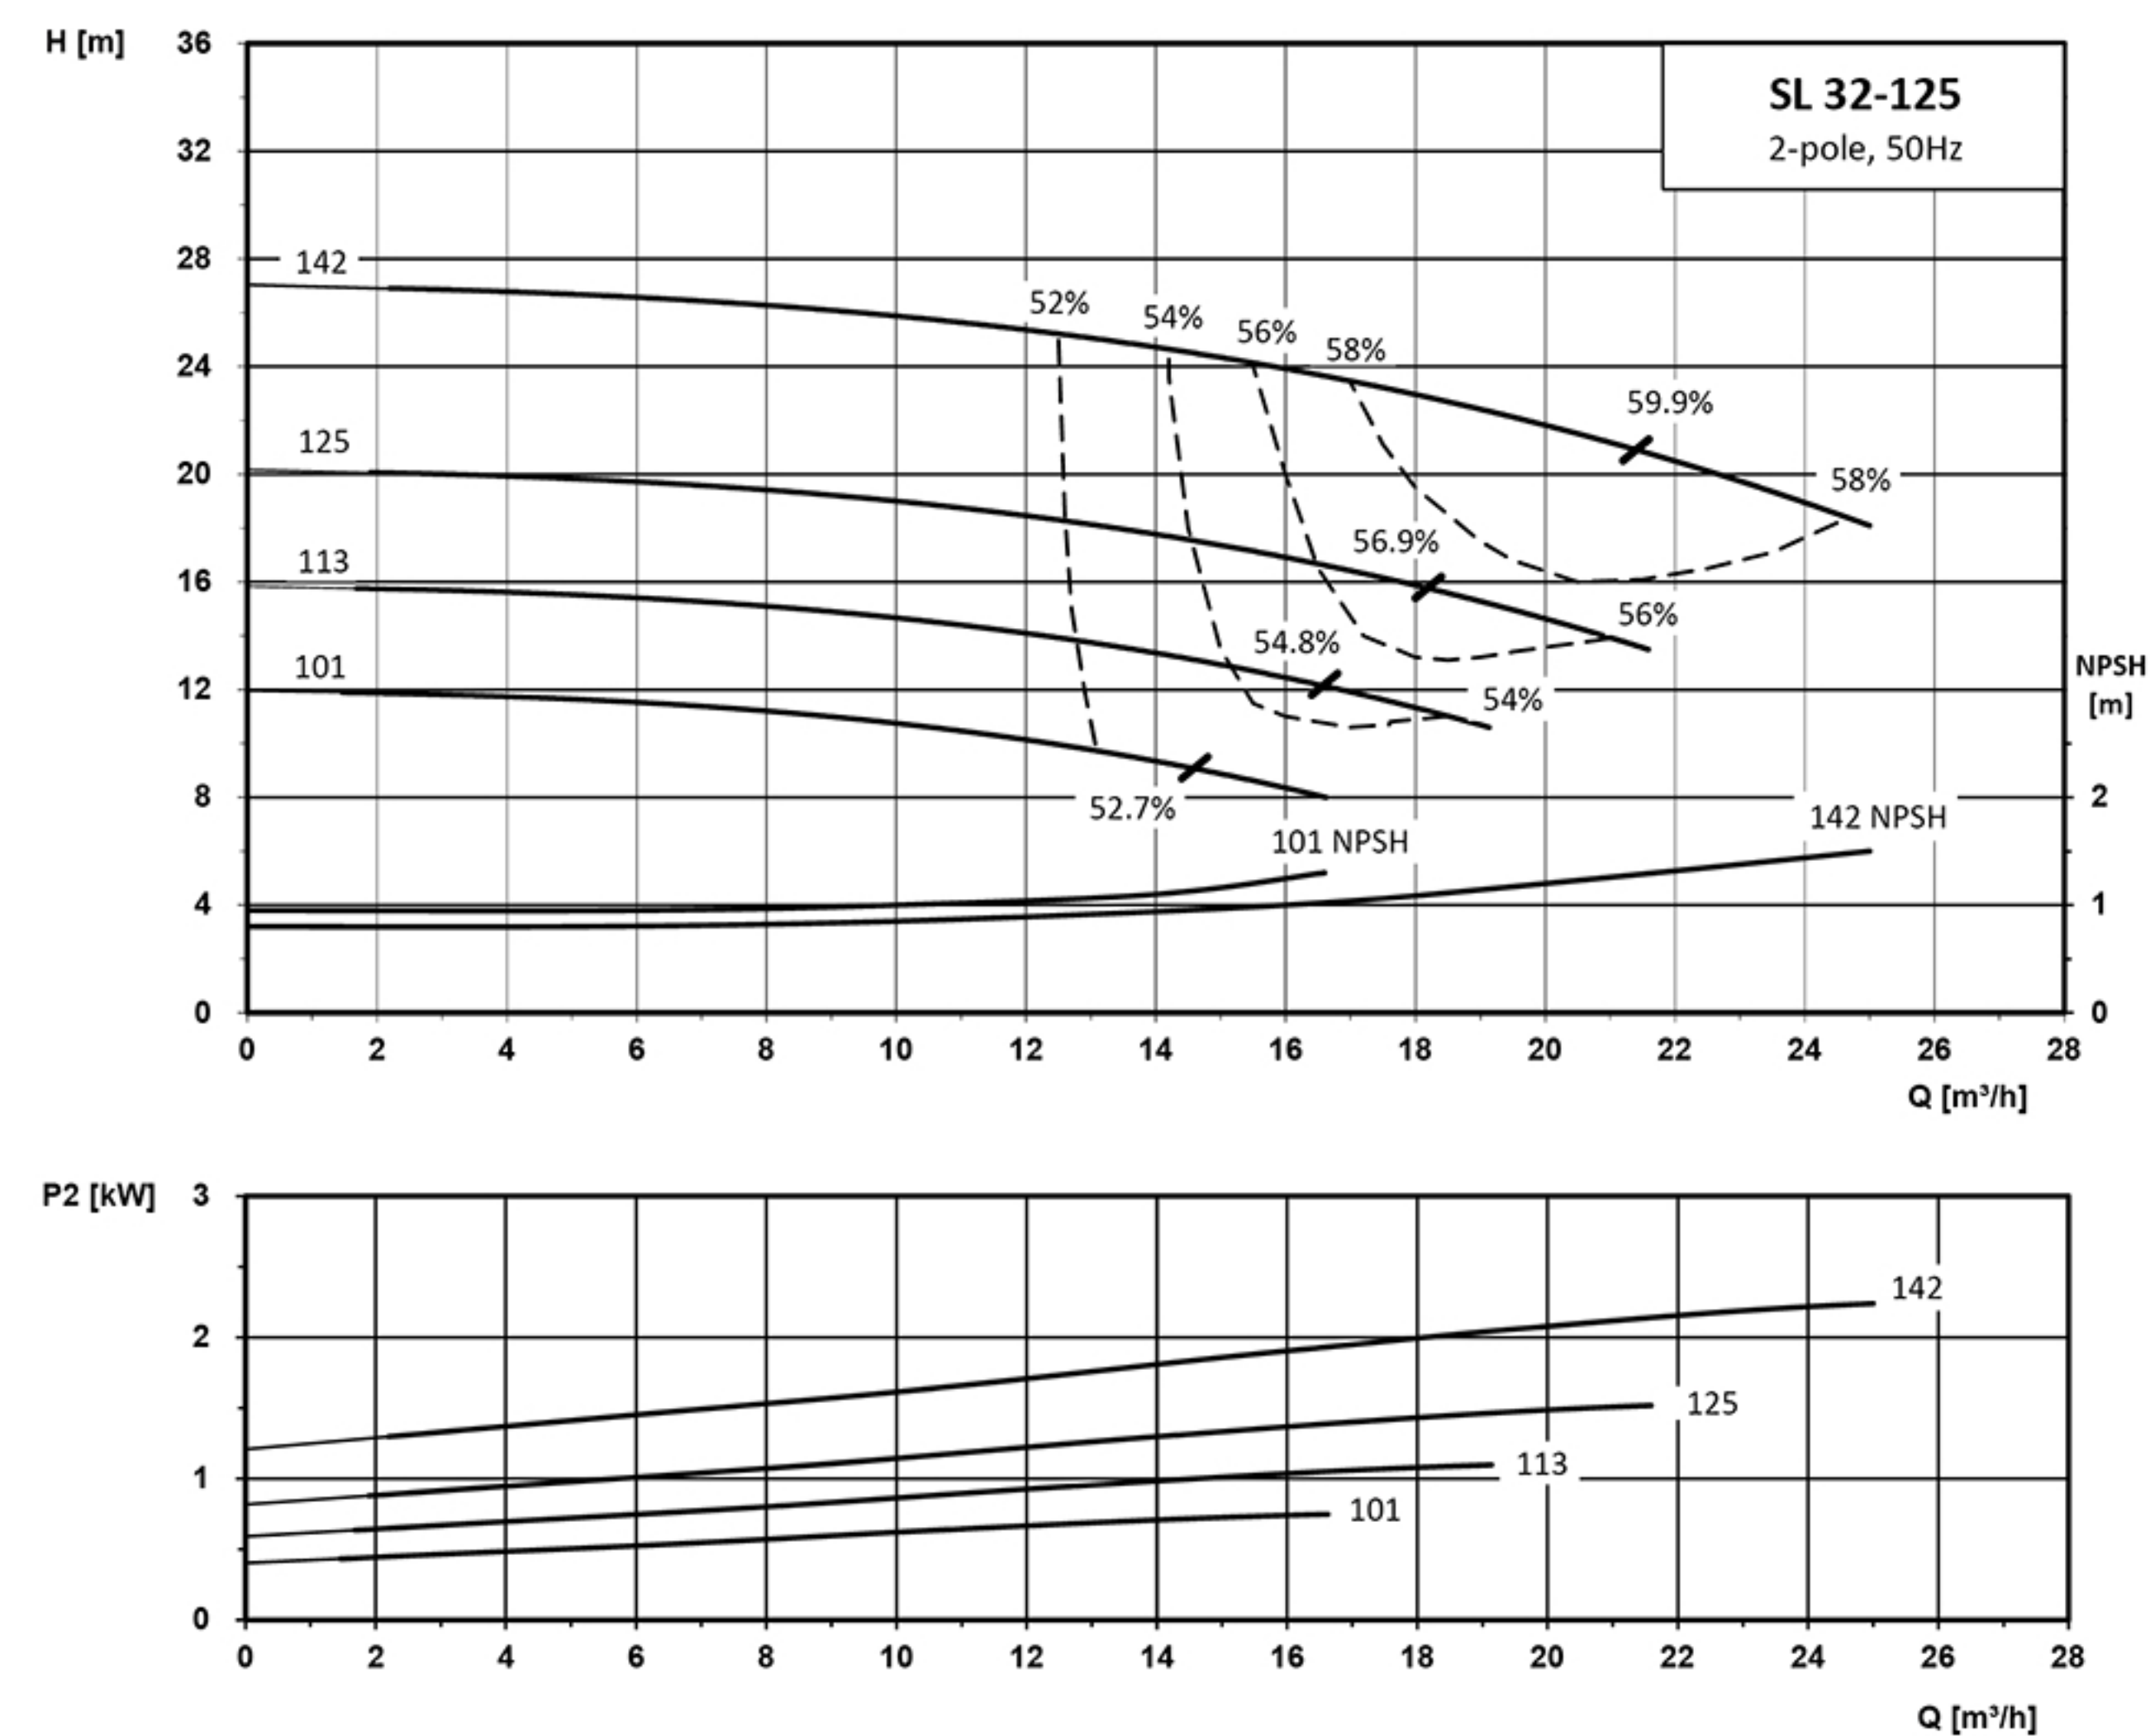

泵型号	Pump Model	SL32-125-0.75-2	SL32-125-1.1-2	SL32-125-1.5-2	SL32-125-2.2-2
电机型号	Motor Model	YE3-80M1-2	YE3-80M2-2	YE3-90S-2	YE3-90L-2
电机功率(kW)	Motor Power(kW)	0.75	1.1	1.5	2.2
叶轮直径(mm)	Impeller Diameter(mm)	101	113	125	142


SL(Z) 40-125

性能曲线和技术数据 Performance Curves and Technical Data

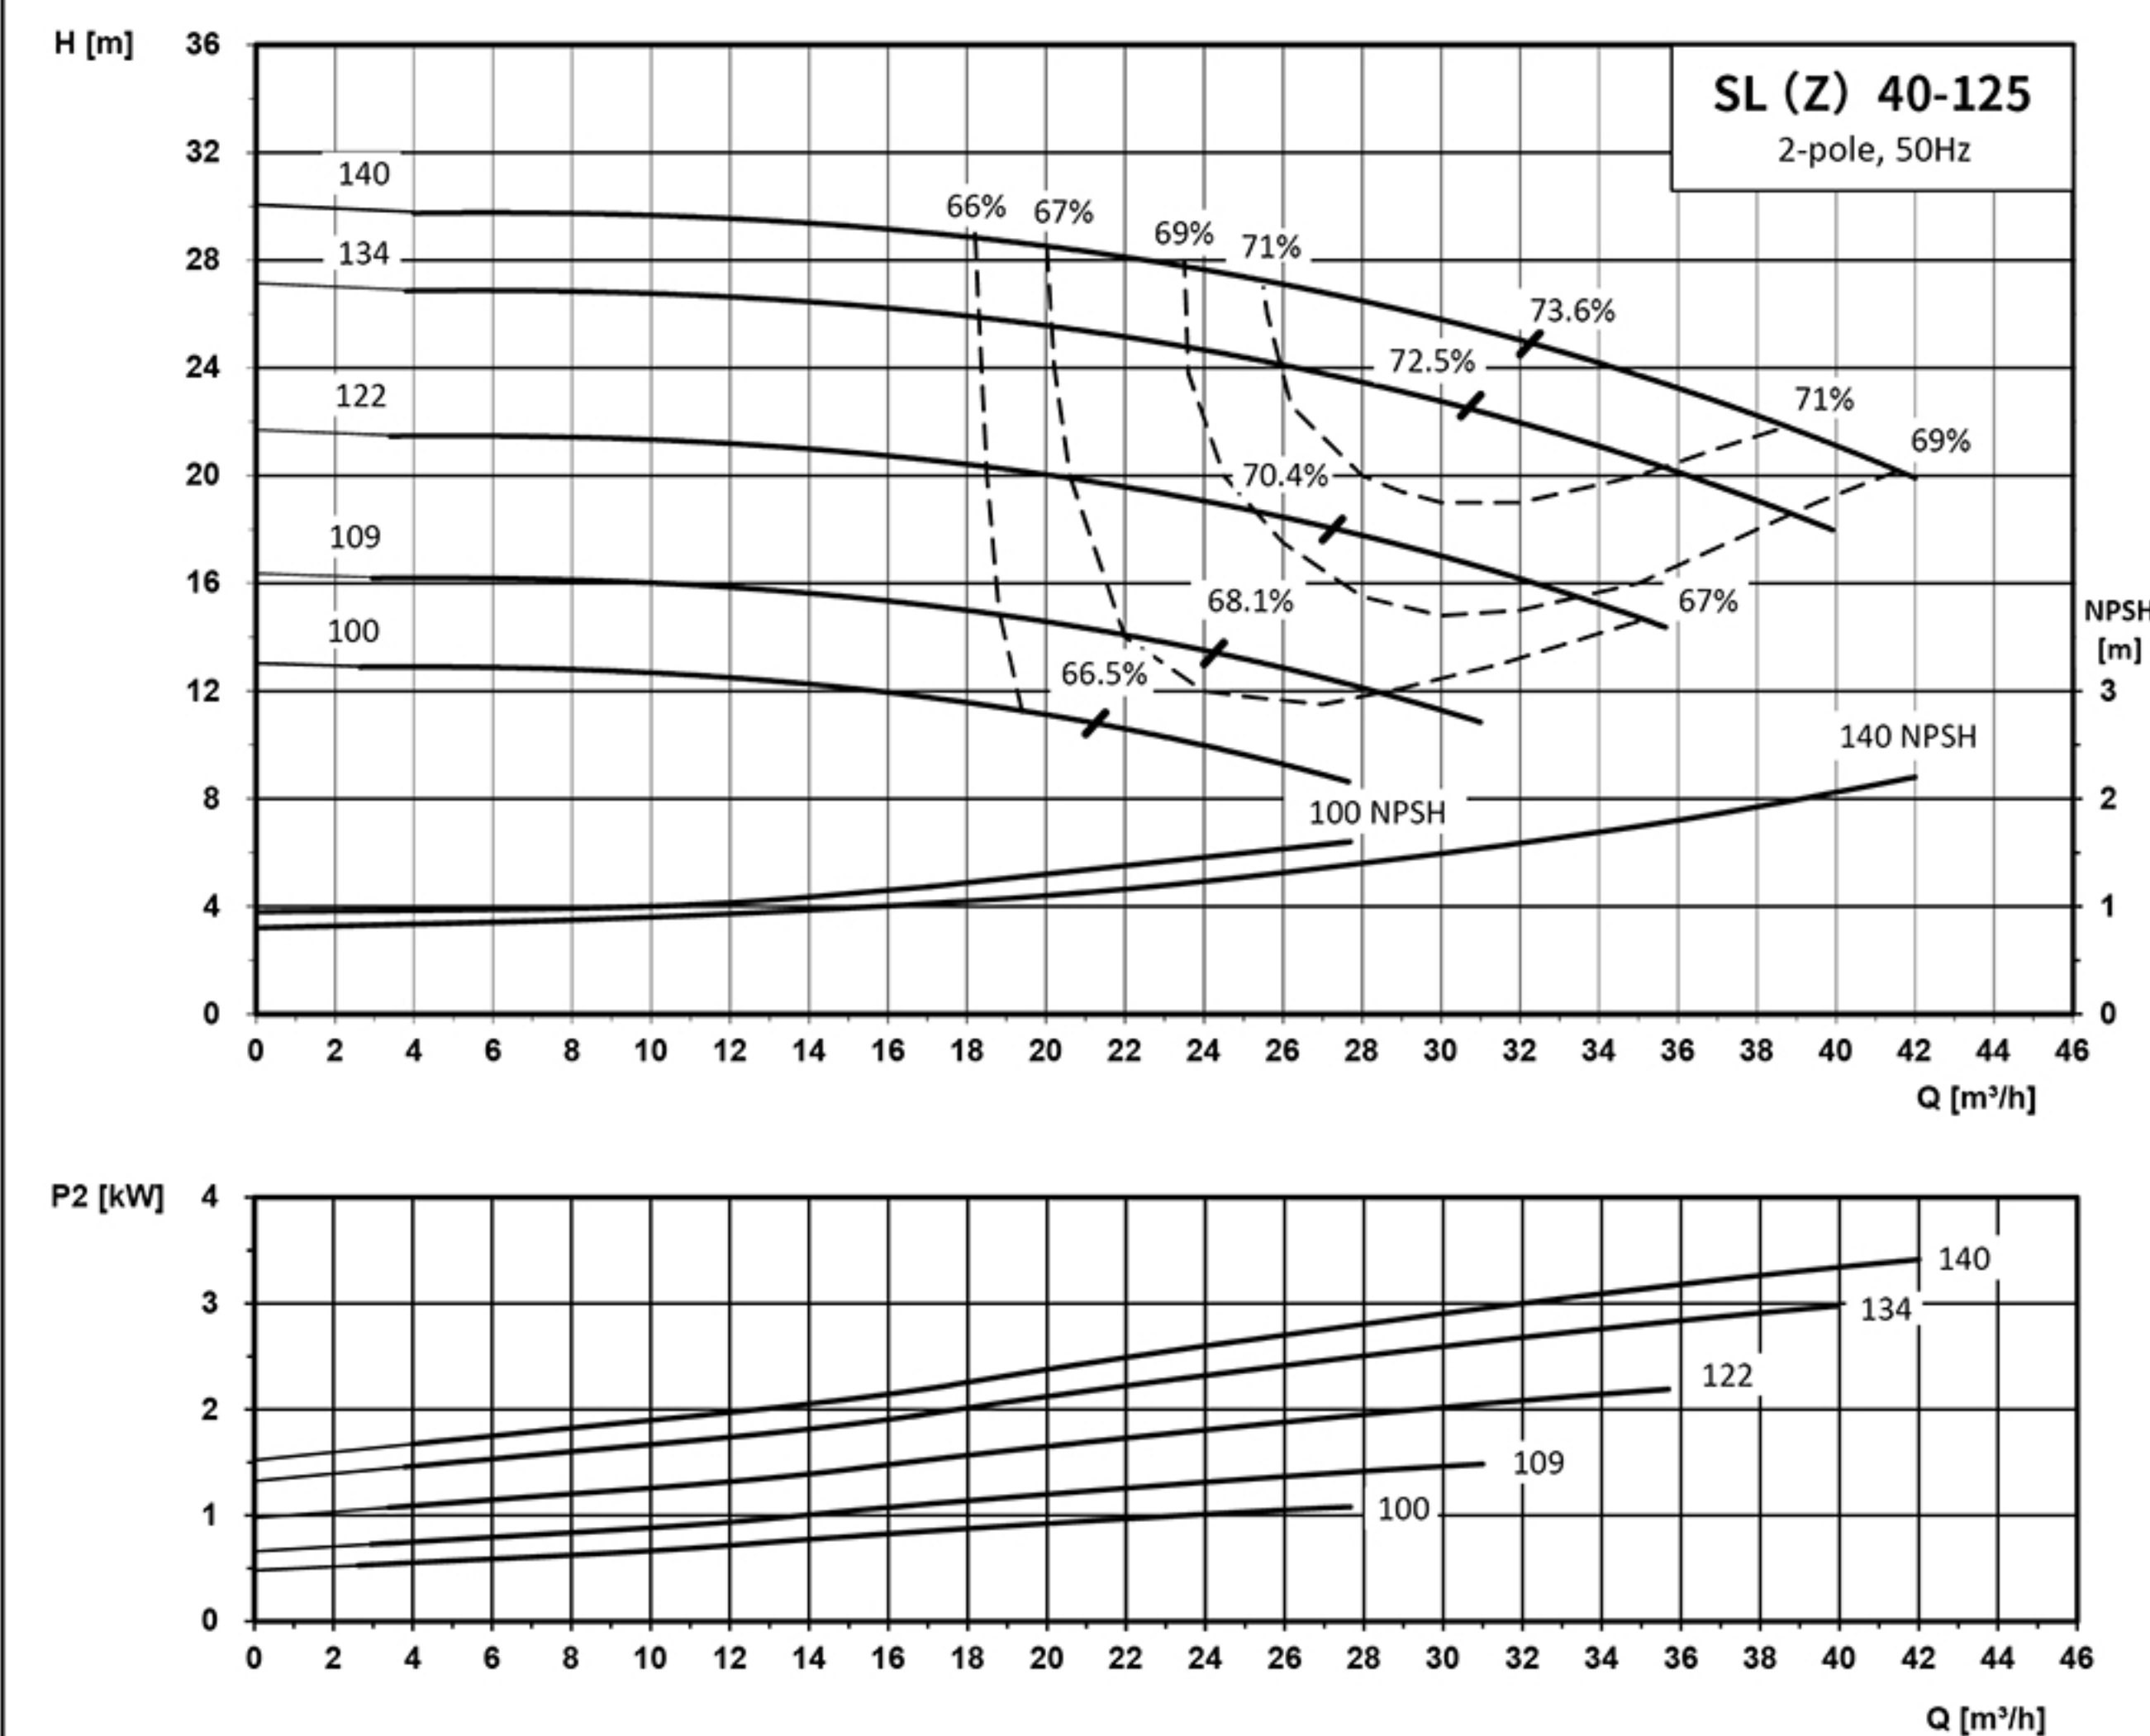


泵型号	Pump Model	SL40-125-1.1-2	SL40-125-1.5-2	SL40-125-2.2-2	SL(Z)40-125-3-2	SL(Z)40-125-4-2
电机型号	Motor Model	YE3-80M2-2	YE3-90S-2	YE3-90L-2	YE3-100L-2	YE3-112M-2
电机功率(kW)	Motor Power(kW)	1.1	1.5	2.2	3	4
叶轮直径(mm)	Impeller Diameter(mm)	100	109	122	134	140

SL(Z) 50-125

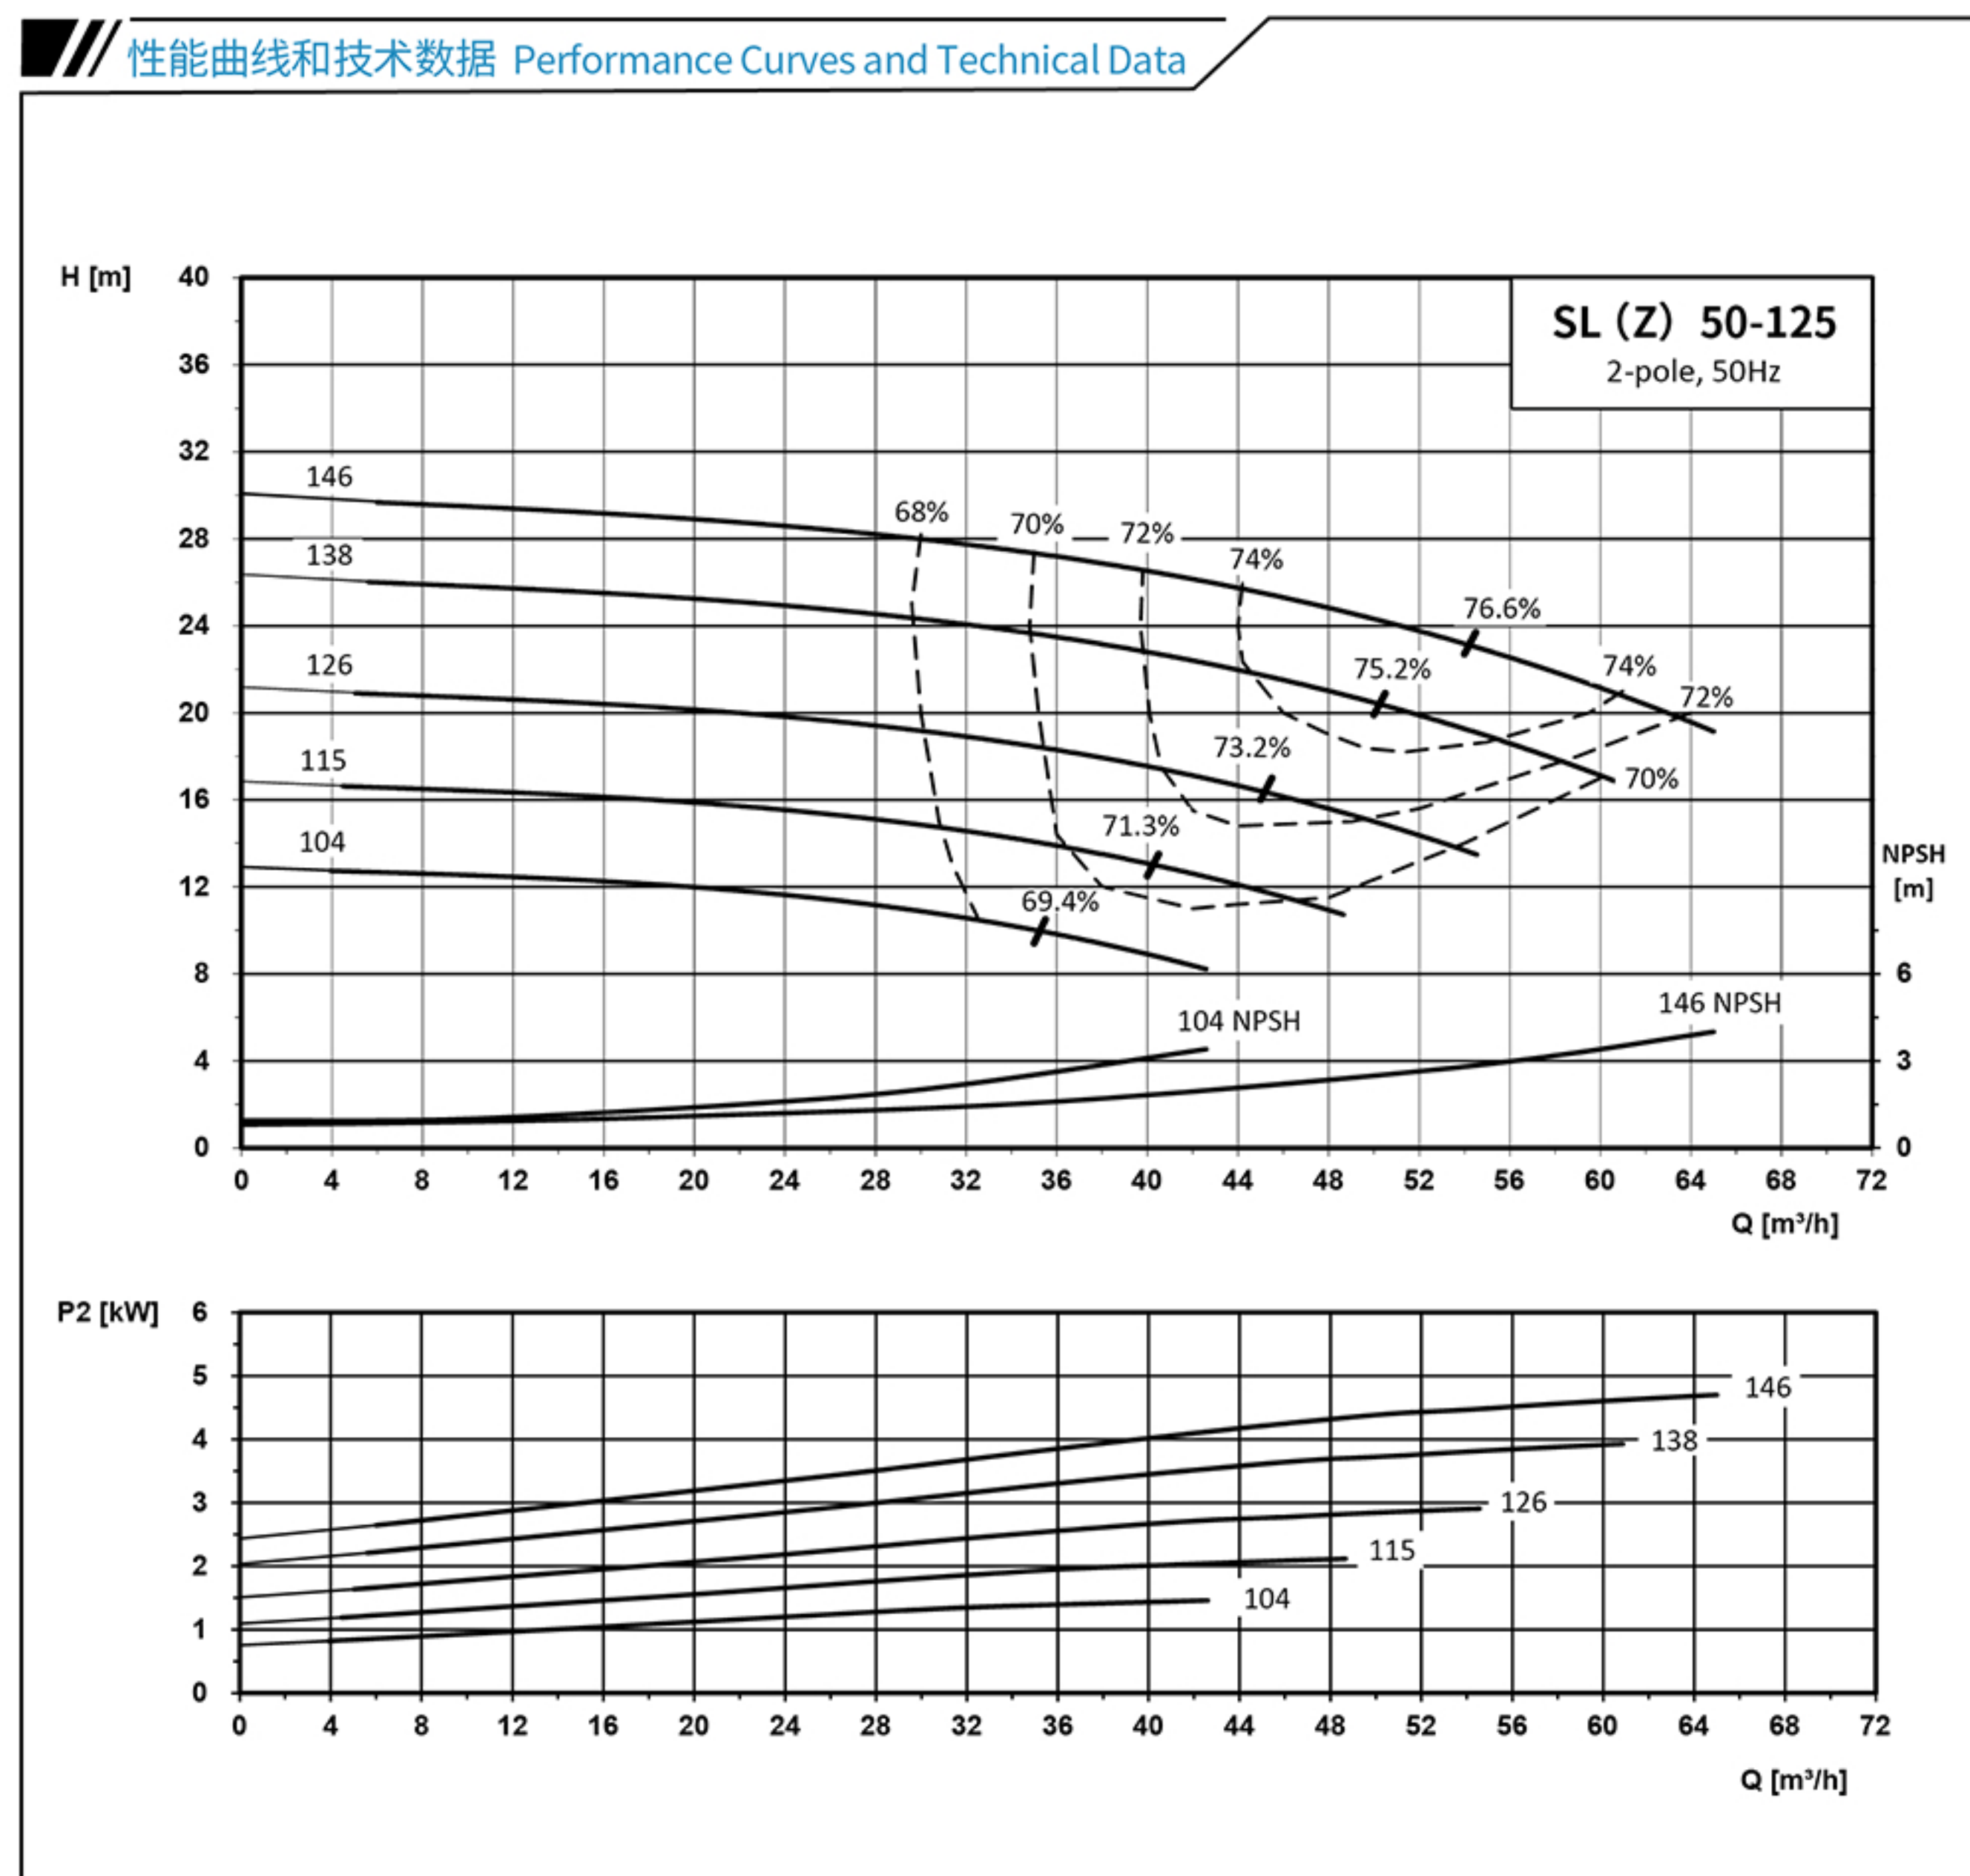


泵型号	Pump Model	SL50-125-1.5-2	SL50-125-2.2-2	SL(Z)50-125-3-2	SL(Z)50-125-4-2	SL(Z)50-125-5.5-2
电机型号	Motor Model	YE3-90S-2	YE3-90L-2	YE3-100L-2	YE3-112M-2	YE3-132S1-2
电机功率(kW)	Motor Power(kW)	1.5	2.2	3	4	5.5
叶轮直径(mm)	Impeller Diameter(mm)	104	115	126	138	146

SL(Z) 65-125

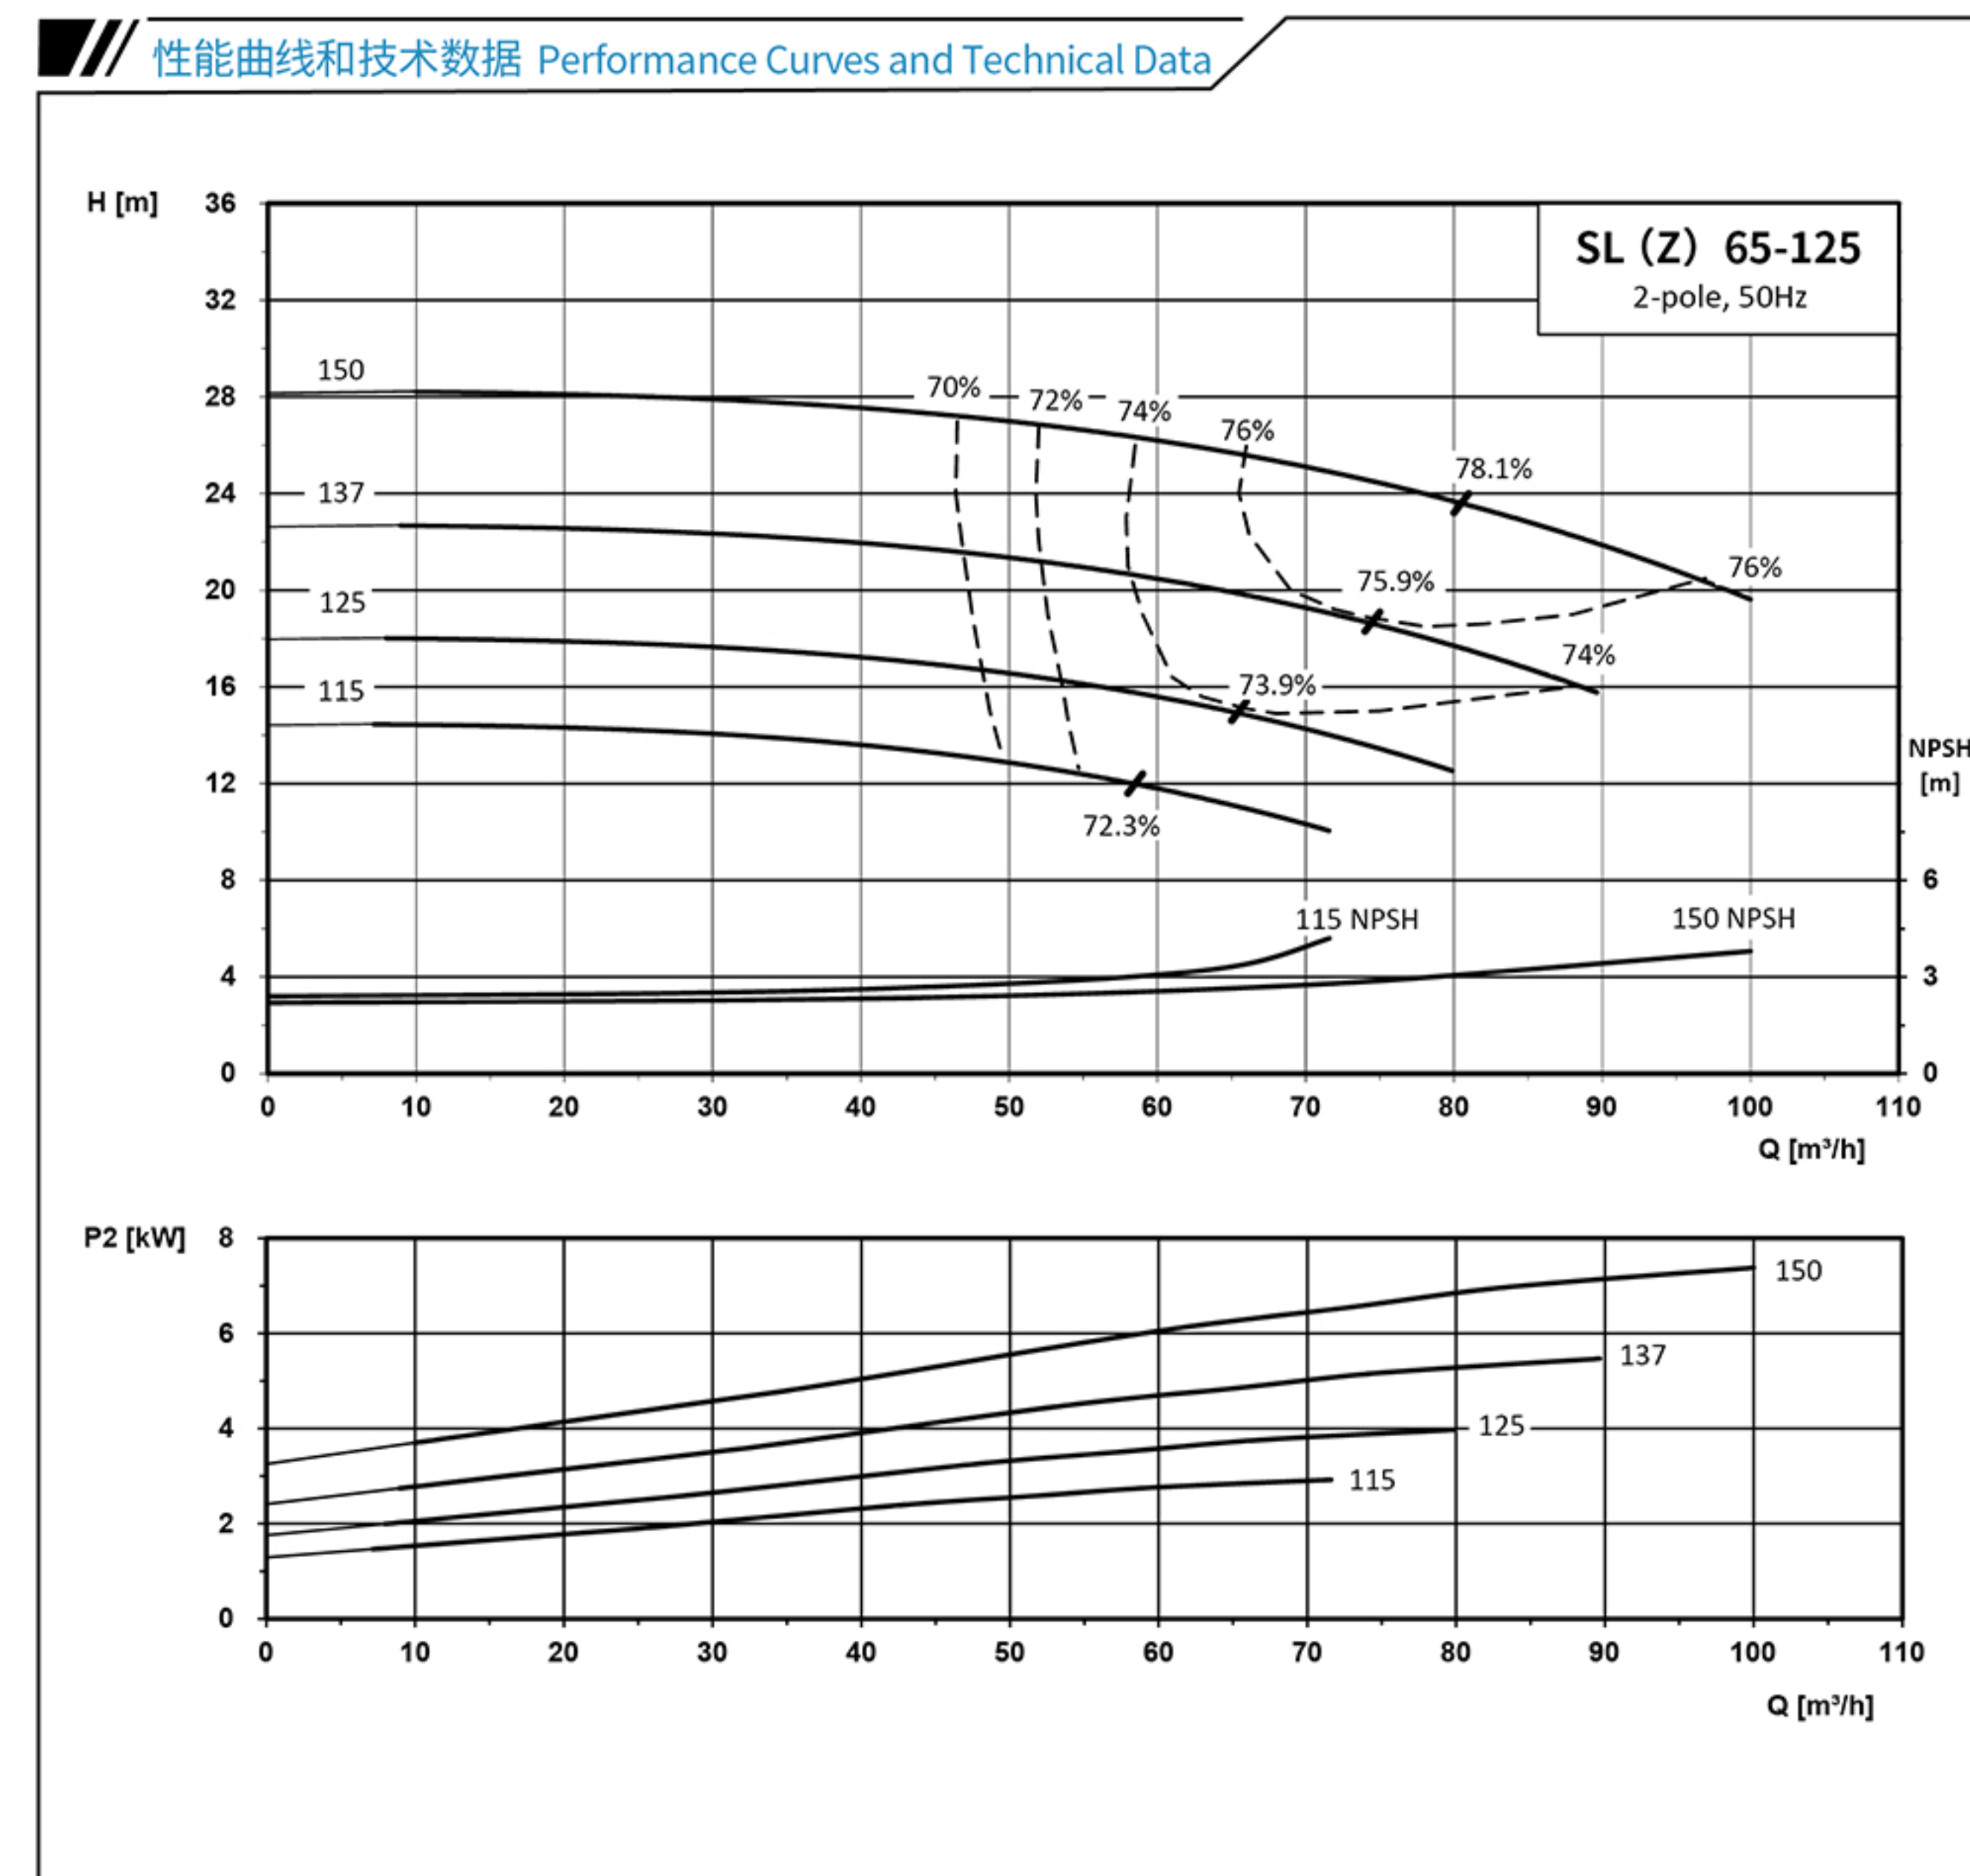


泵型号	Pump Model	SL(Z)65-125-3-2	SL(Z)65-125-4-2	SL(Z)65-125-5.5-2	SL(Z)65-125-7.5-2
电机型号	Motor Model	YE3-100L-2	YE3-112M-2	YE3-132S1-2	YE3-132S2-2
电机功率(kW)	Motor Power(kW)	3	4	5.5	7.5
叶轮直径(mm)	Impeller Diameter(mm)	115	125	137	150

SL(Z) 80-125

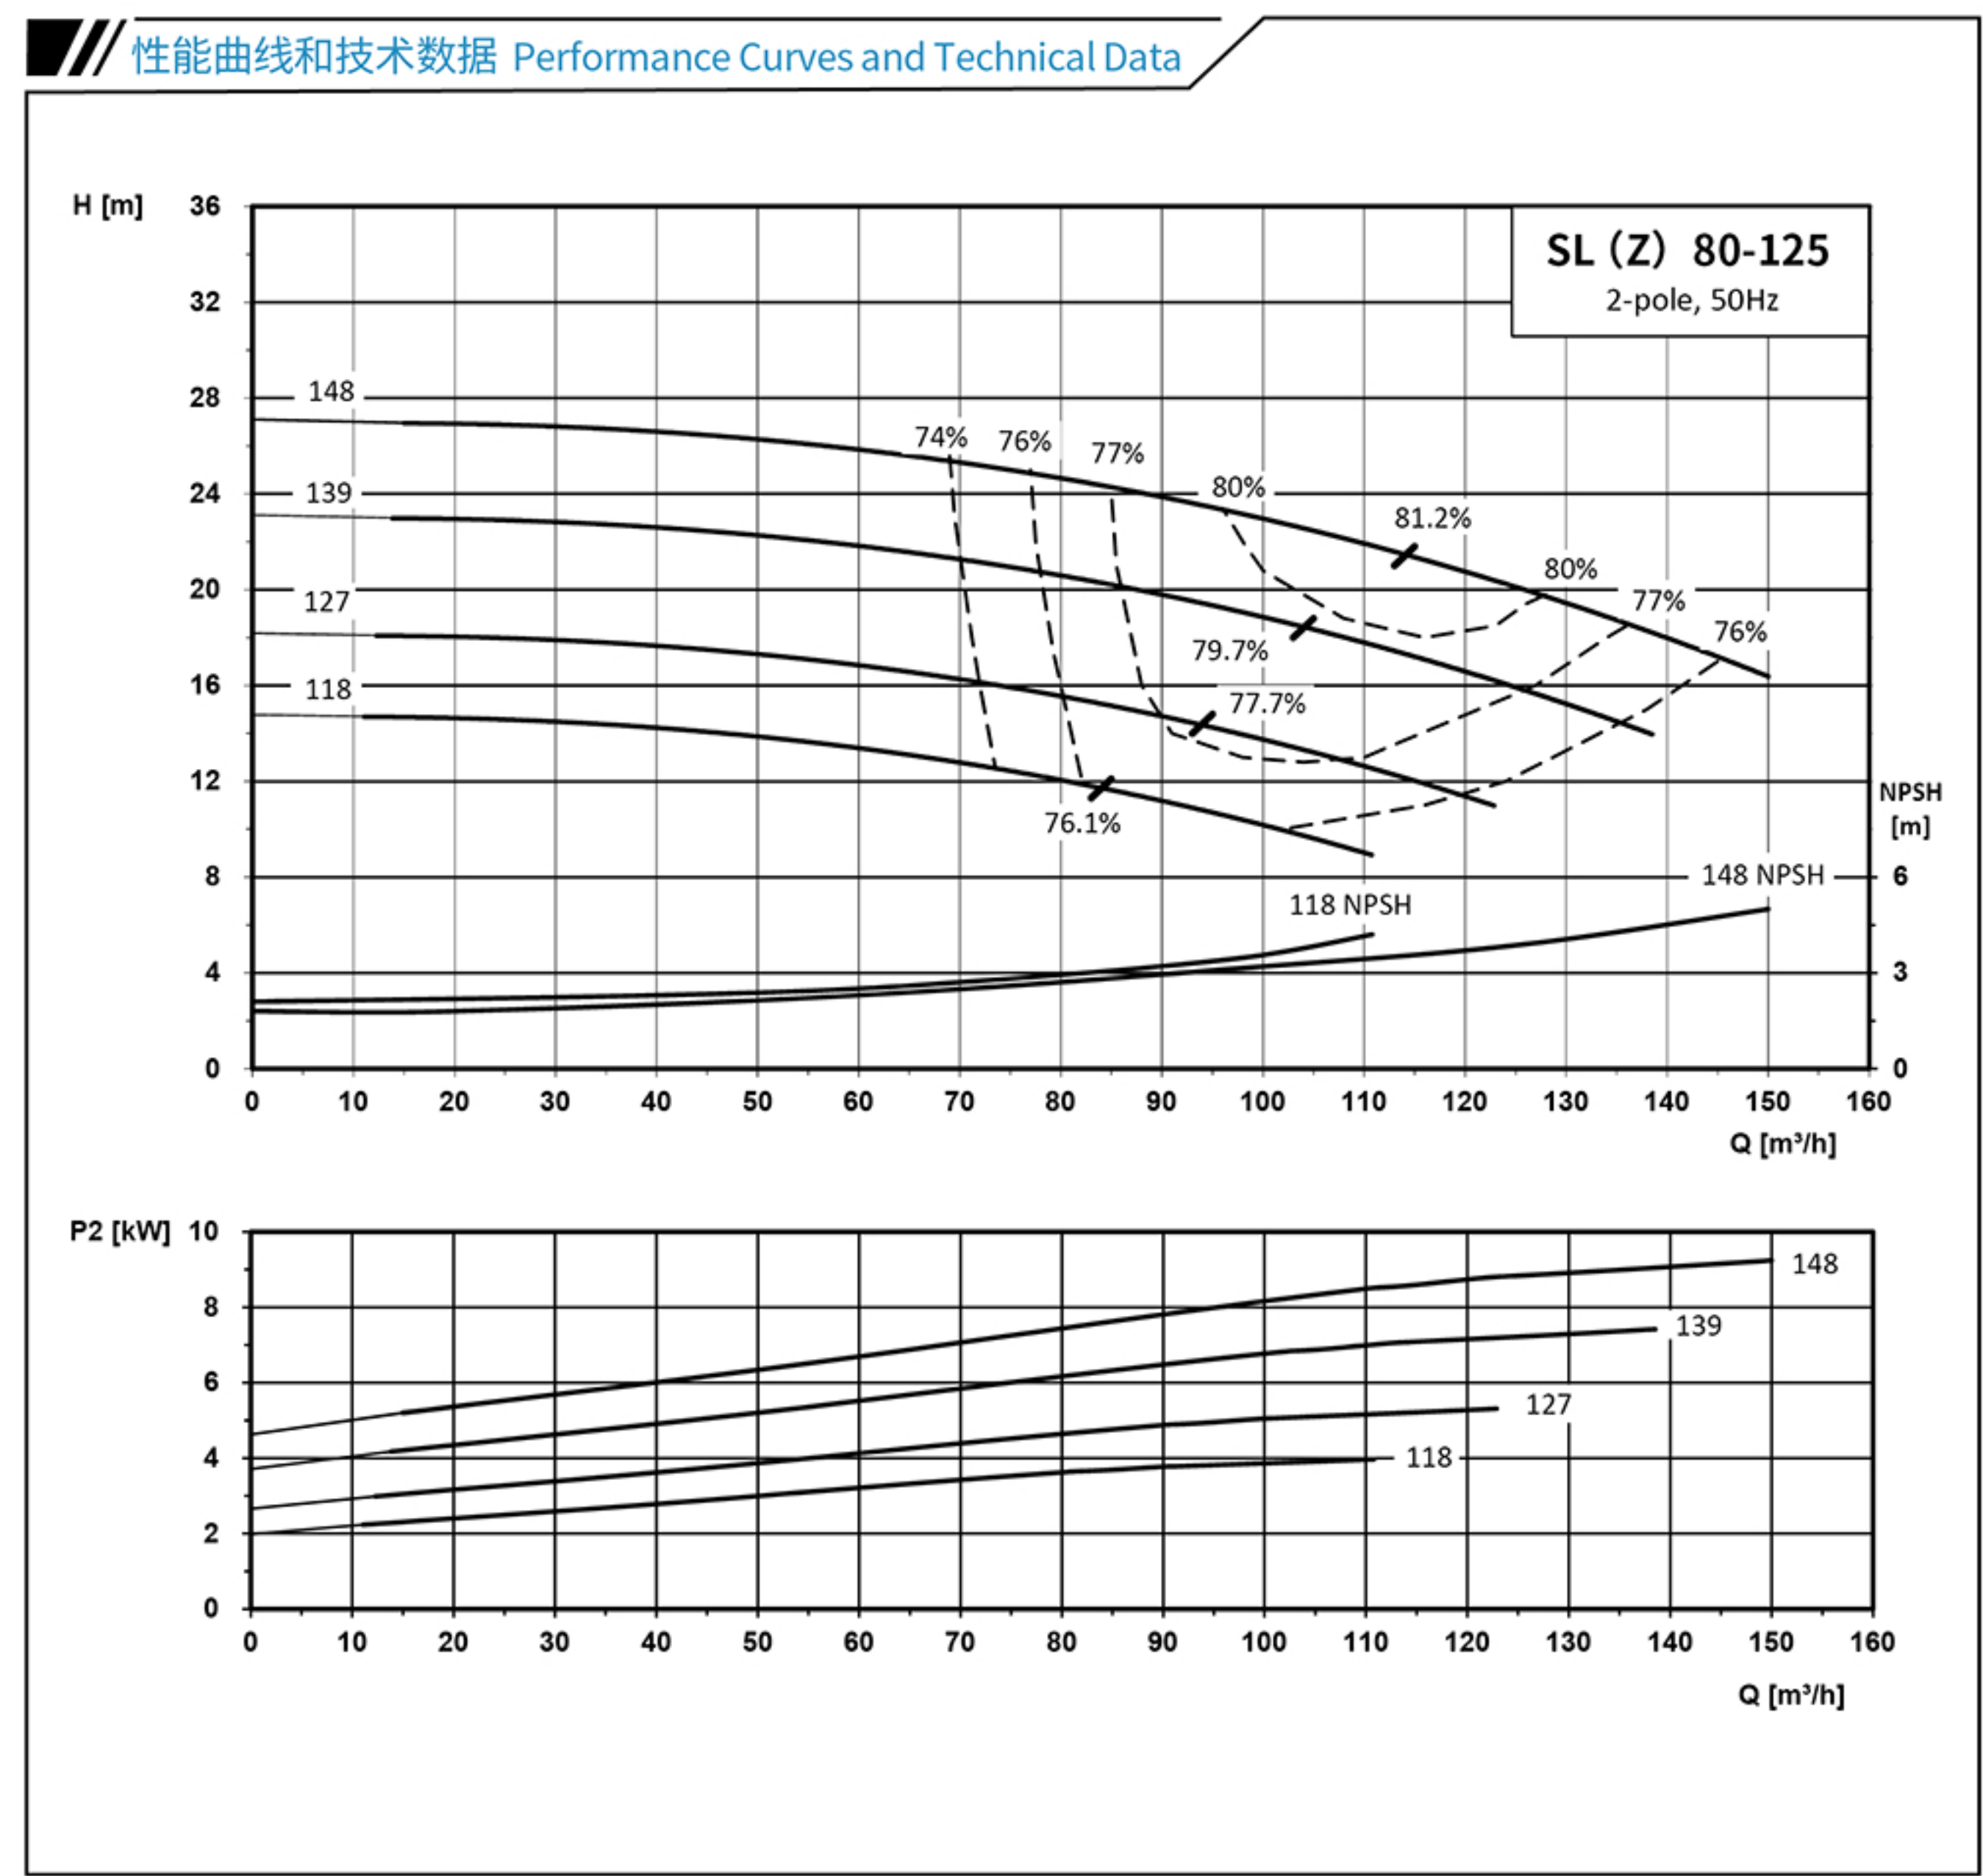


泵型号	Pump Model	SL(Z)80-125-4-2	SL(Z)80-125-5.5-2	SL(Z)80-125-7.5-2	SL(Z)80-125-9.2-2
电机型号	Motor Model	YE3-112M-2	YE3-132S1-2	YE3-132S2-2	YE3-132-2
电机功率(kW)	Motor Power(kW)	4	5.5	7.5	9.2
叶轮直径(mm)	Impeller Diameter(mm)	118	127	139	148

SL(Z) 32-160

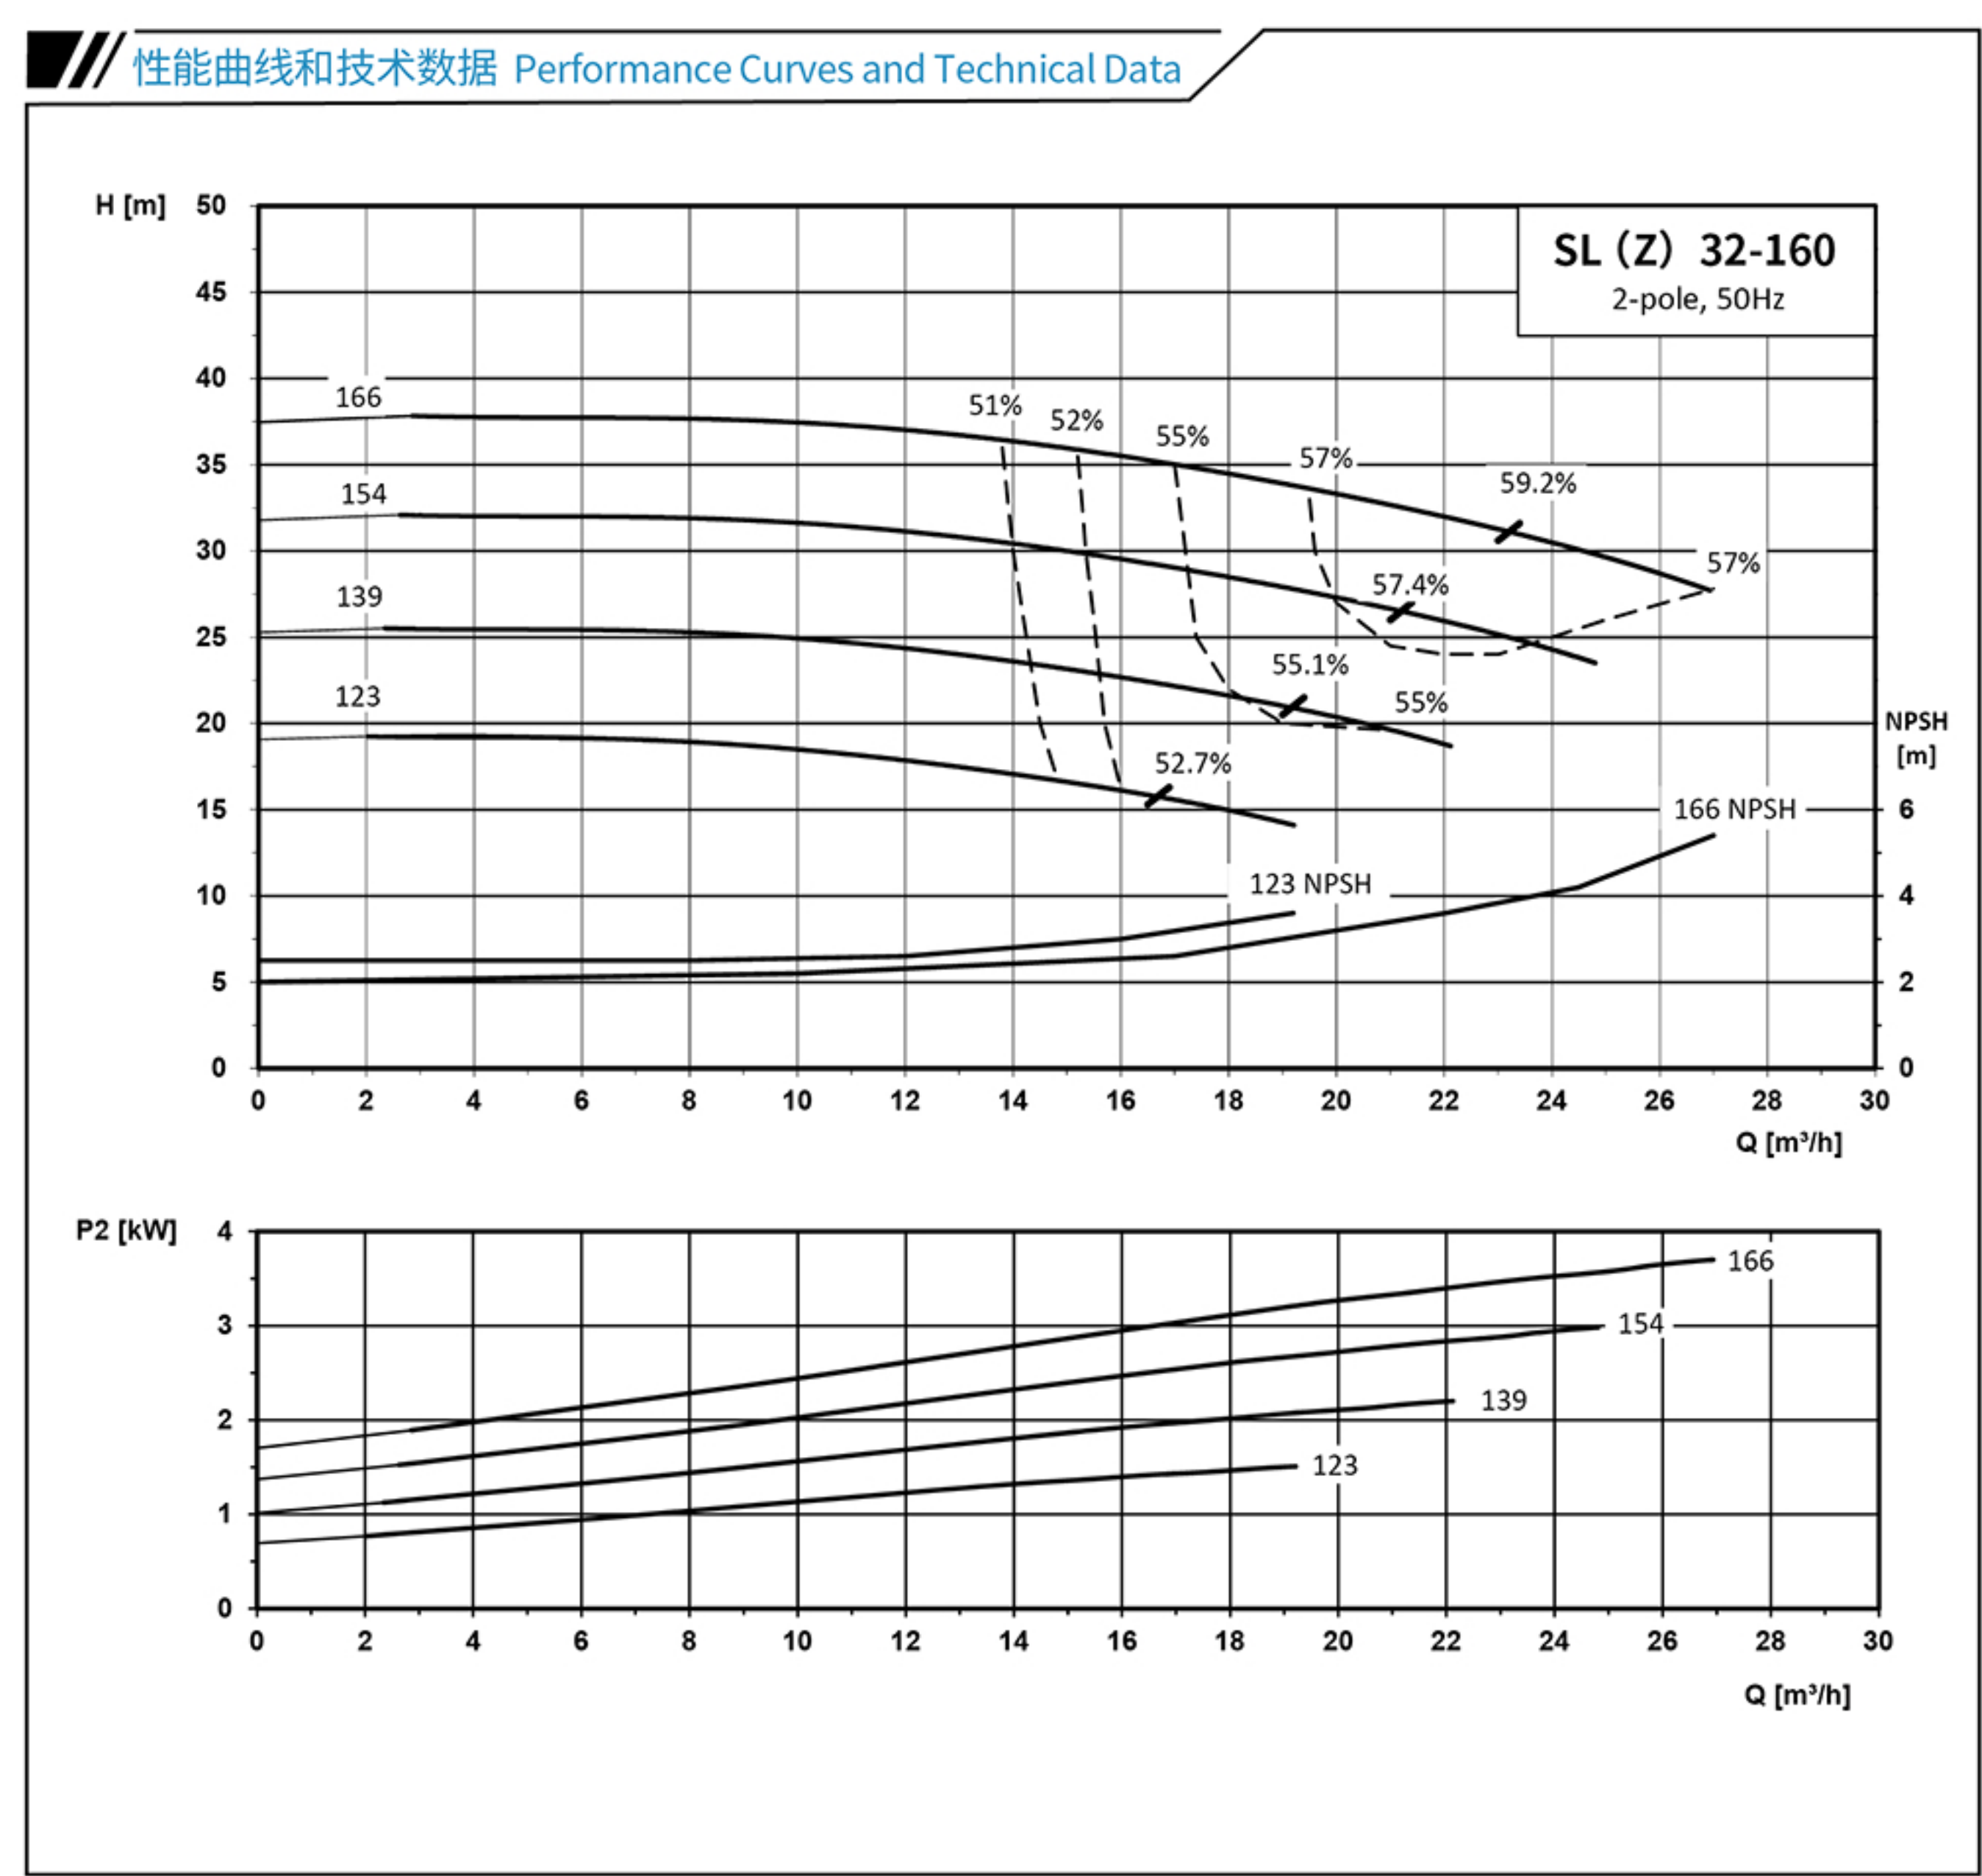


泵型号	Pump Model	SL32-160-1.5-2	SL32-160-2.2-2	SL(Z)32-160-3-2	SL(Z)32-160-4-2
电机型号	Motor Model	YE3-90S-2	YE3-90L-2	YE3-100L-2	YE3-112M-2
电机功率(kW)	Motor Power(kW)	1.5	2.2	3	4
叶轮直径(mm)	Impeller Diameter(mm)	123	139	154	166

SL(Z) 40-160

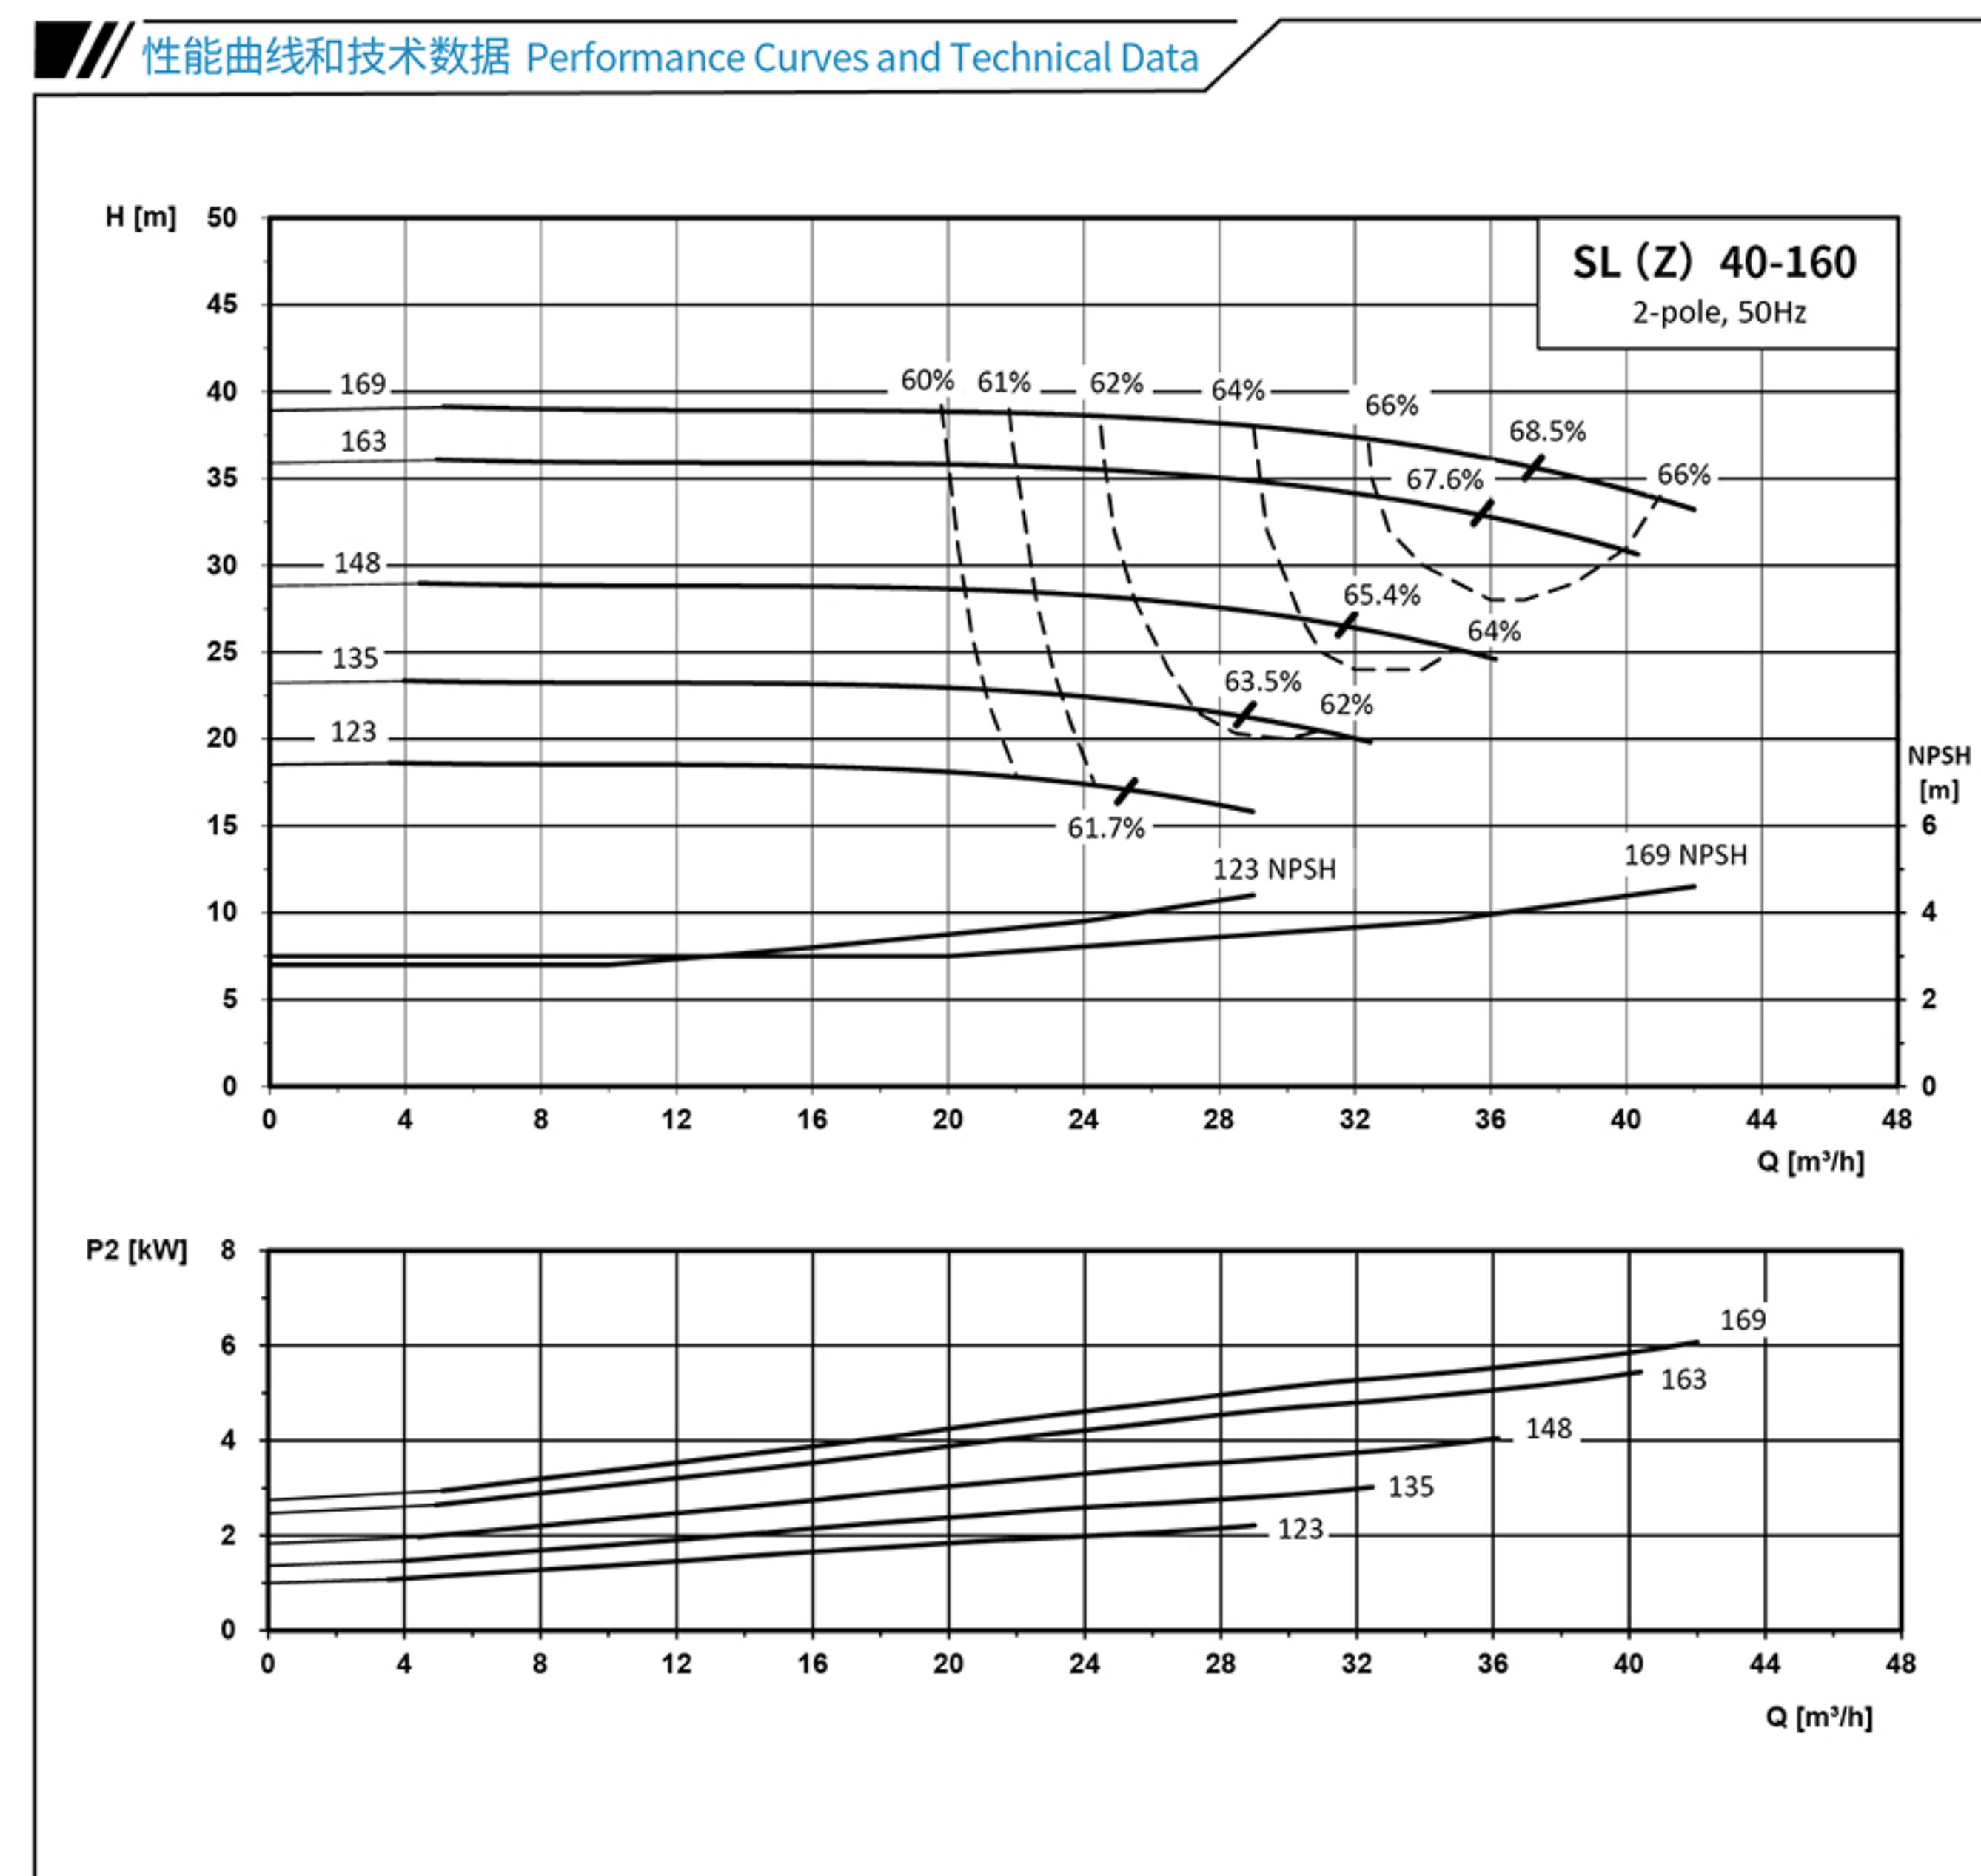

泵型号	Pump Model	SL40-160-2.2-2	SL(Z)40-160-3-2	SL(Z)40-160-4-2	SL(Z)40-160-5.5-2	SL(Z)40-160-7.5-2
电机型号	Motor Model	YE3-90L-2	YE3-100L-2	YE3-112M-2	YE3-132S1-2	YE3-132S2-2
电机功率(kW)	Motor Power(kW)	2.2	3	4	5.5	7.5
叶轮直径(mm)	Impeller Diameter(mm)	123	135	148	163	169


SL(Z) 50-160

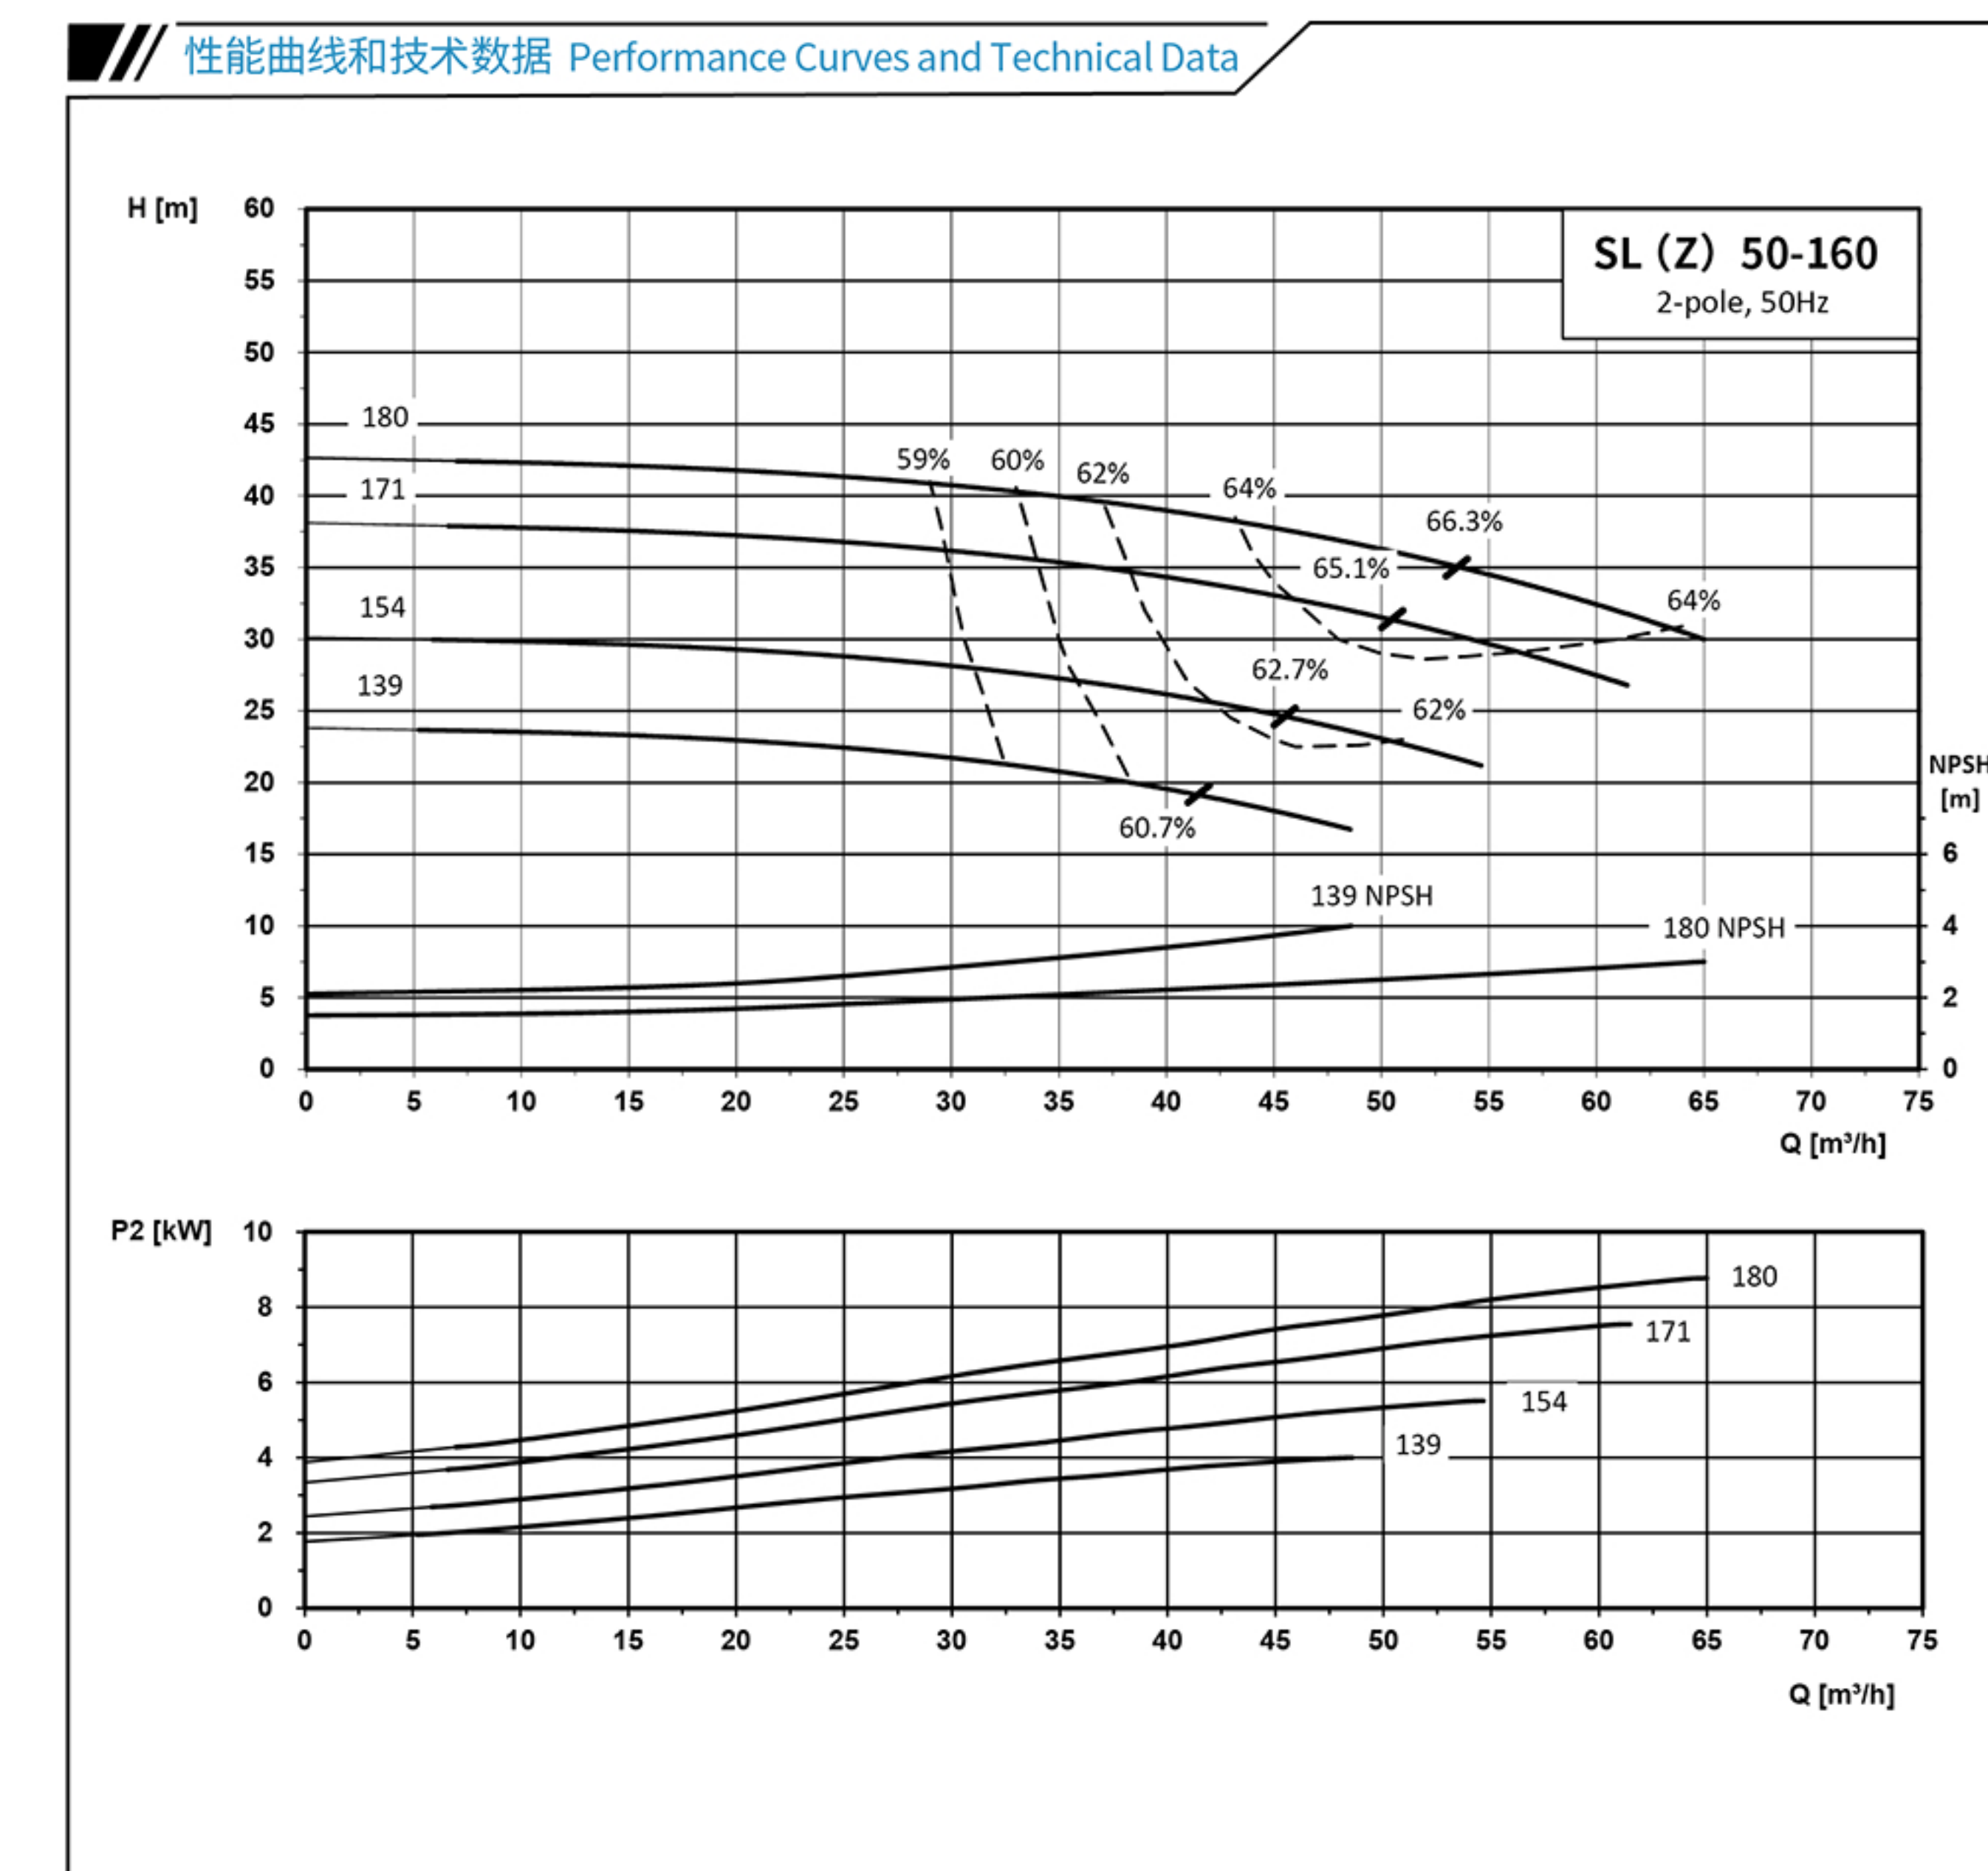

泵型号	Pump Model	SL(Z)50-160-4-2	SL(Z)50-160-5.5-2	SL(Z)50-160-7.5-2	SL(Z)50-160-9.2-2
电机型号	Motor Model	YE3-112M-2	YE3-132S1-2	YE3-132S2-2	YE3-132L-2
电机功率(kW)	Motor Power(kW)	4	5.5	7.5	9.2
叶轮直径(mm)	Impeller Diameter(mm)	139	154	171	180

SL(Z) 65-160


性能曲线和技术数据 Performance Curves and Technical Data

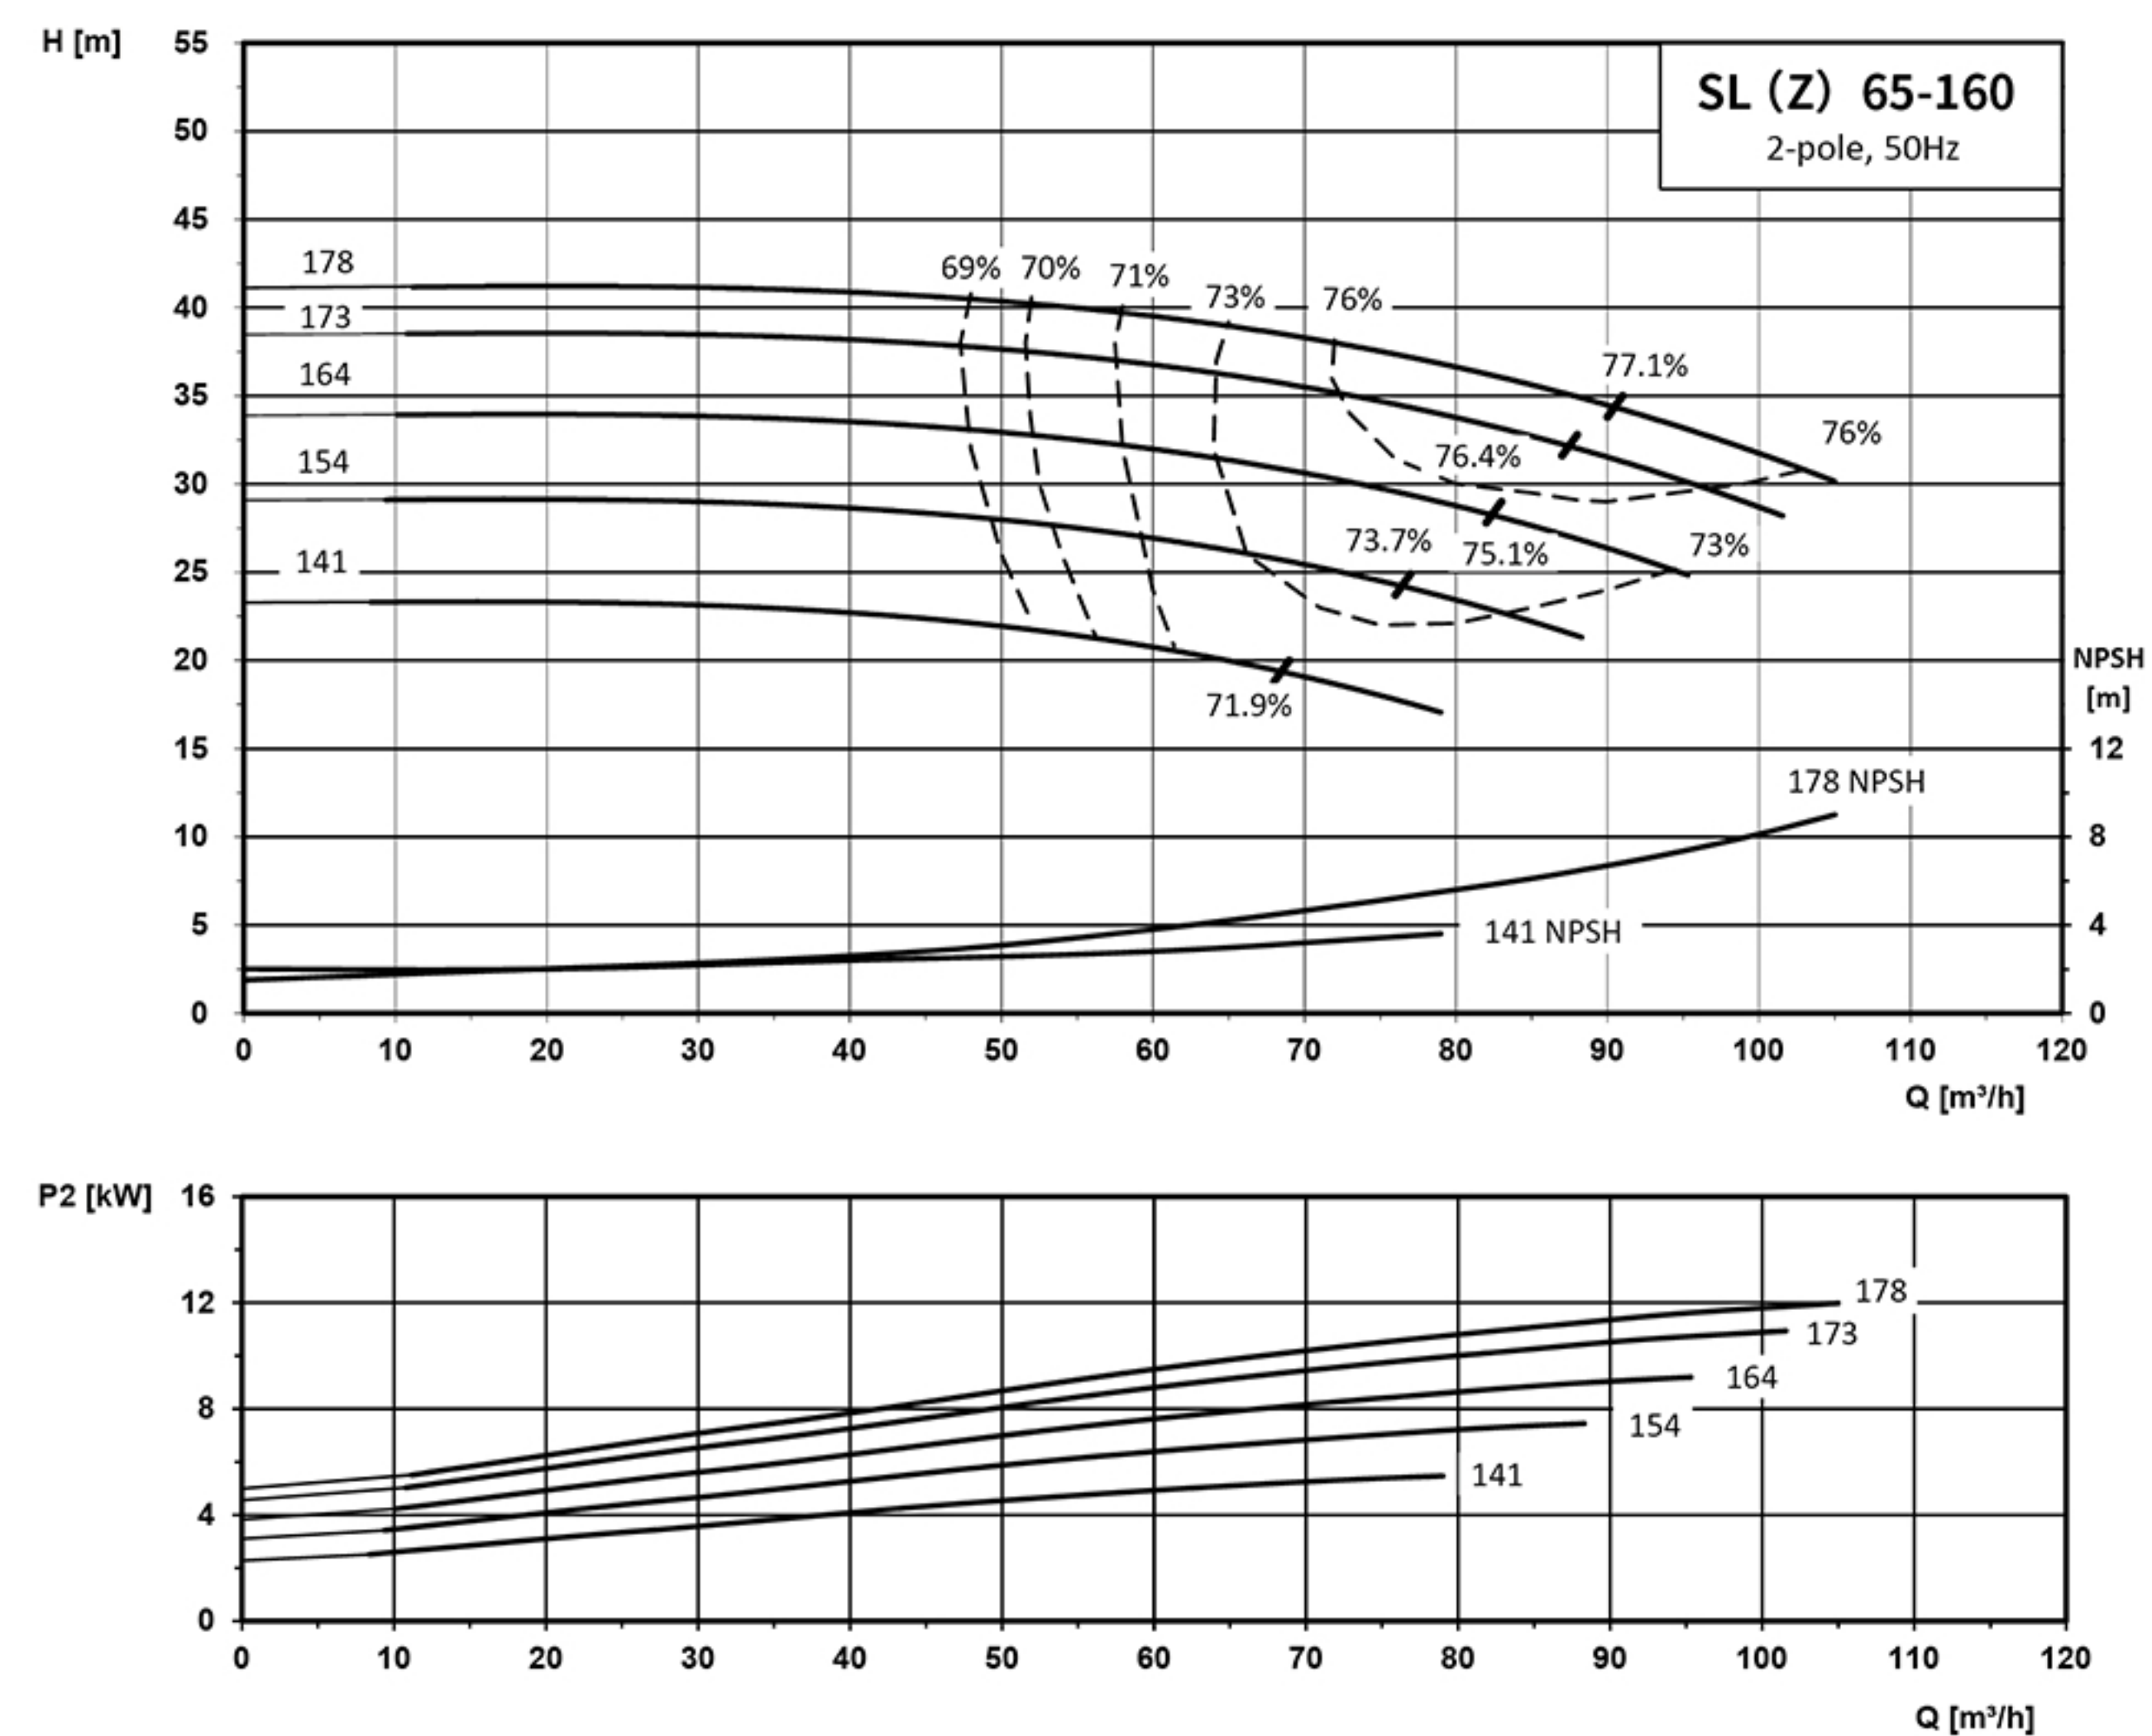

泵型号	Pump Model	SL(Z)65-160-5.5-2	SL(Z)65-160-7.5-2	SL(Z)65-160-9.2-2	SL(Z)65-160-11-2	SL(Z)65-160-15-2
电机型号	Motor Model	YE3-132S1-2	YE3-132S2-2	YE3-132L-2	YE3-160M1-2	YE3-160M1-2
电机功率(kW)	Motor Power(kW)	5.5	7.5	9.2	11	15
叶轮直径(mm)	Impeller Diameter(mm)	141	154	164	173	178


SL(Z) 80-160

性能曲线和技术数据 Performance Curves and Technical Data

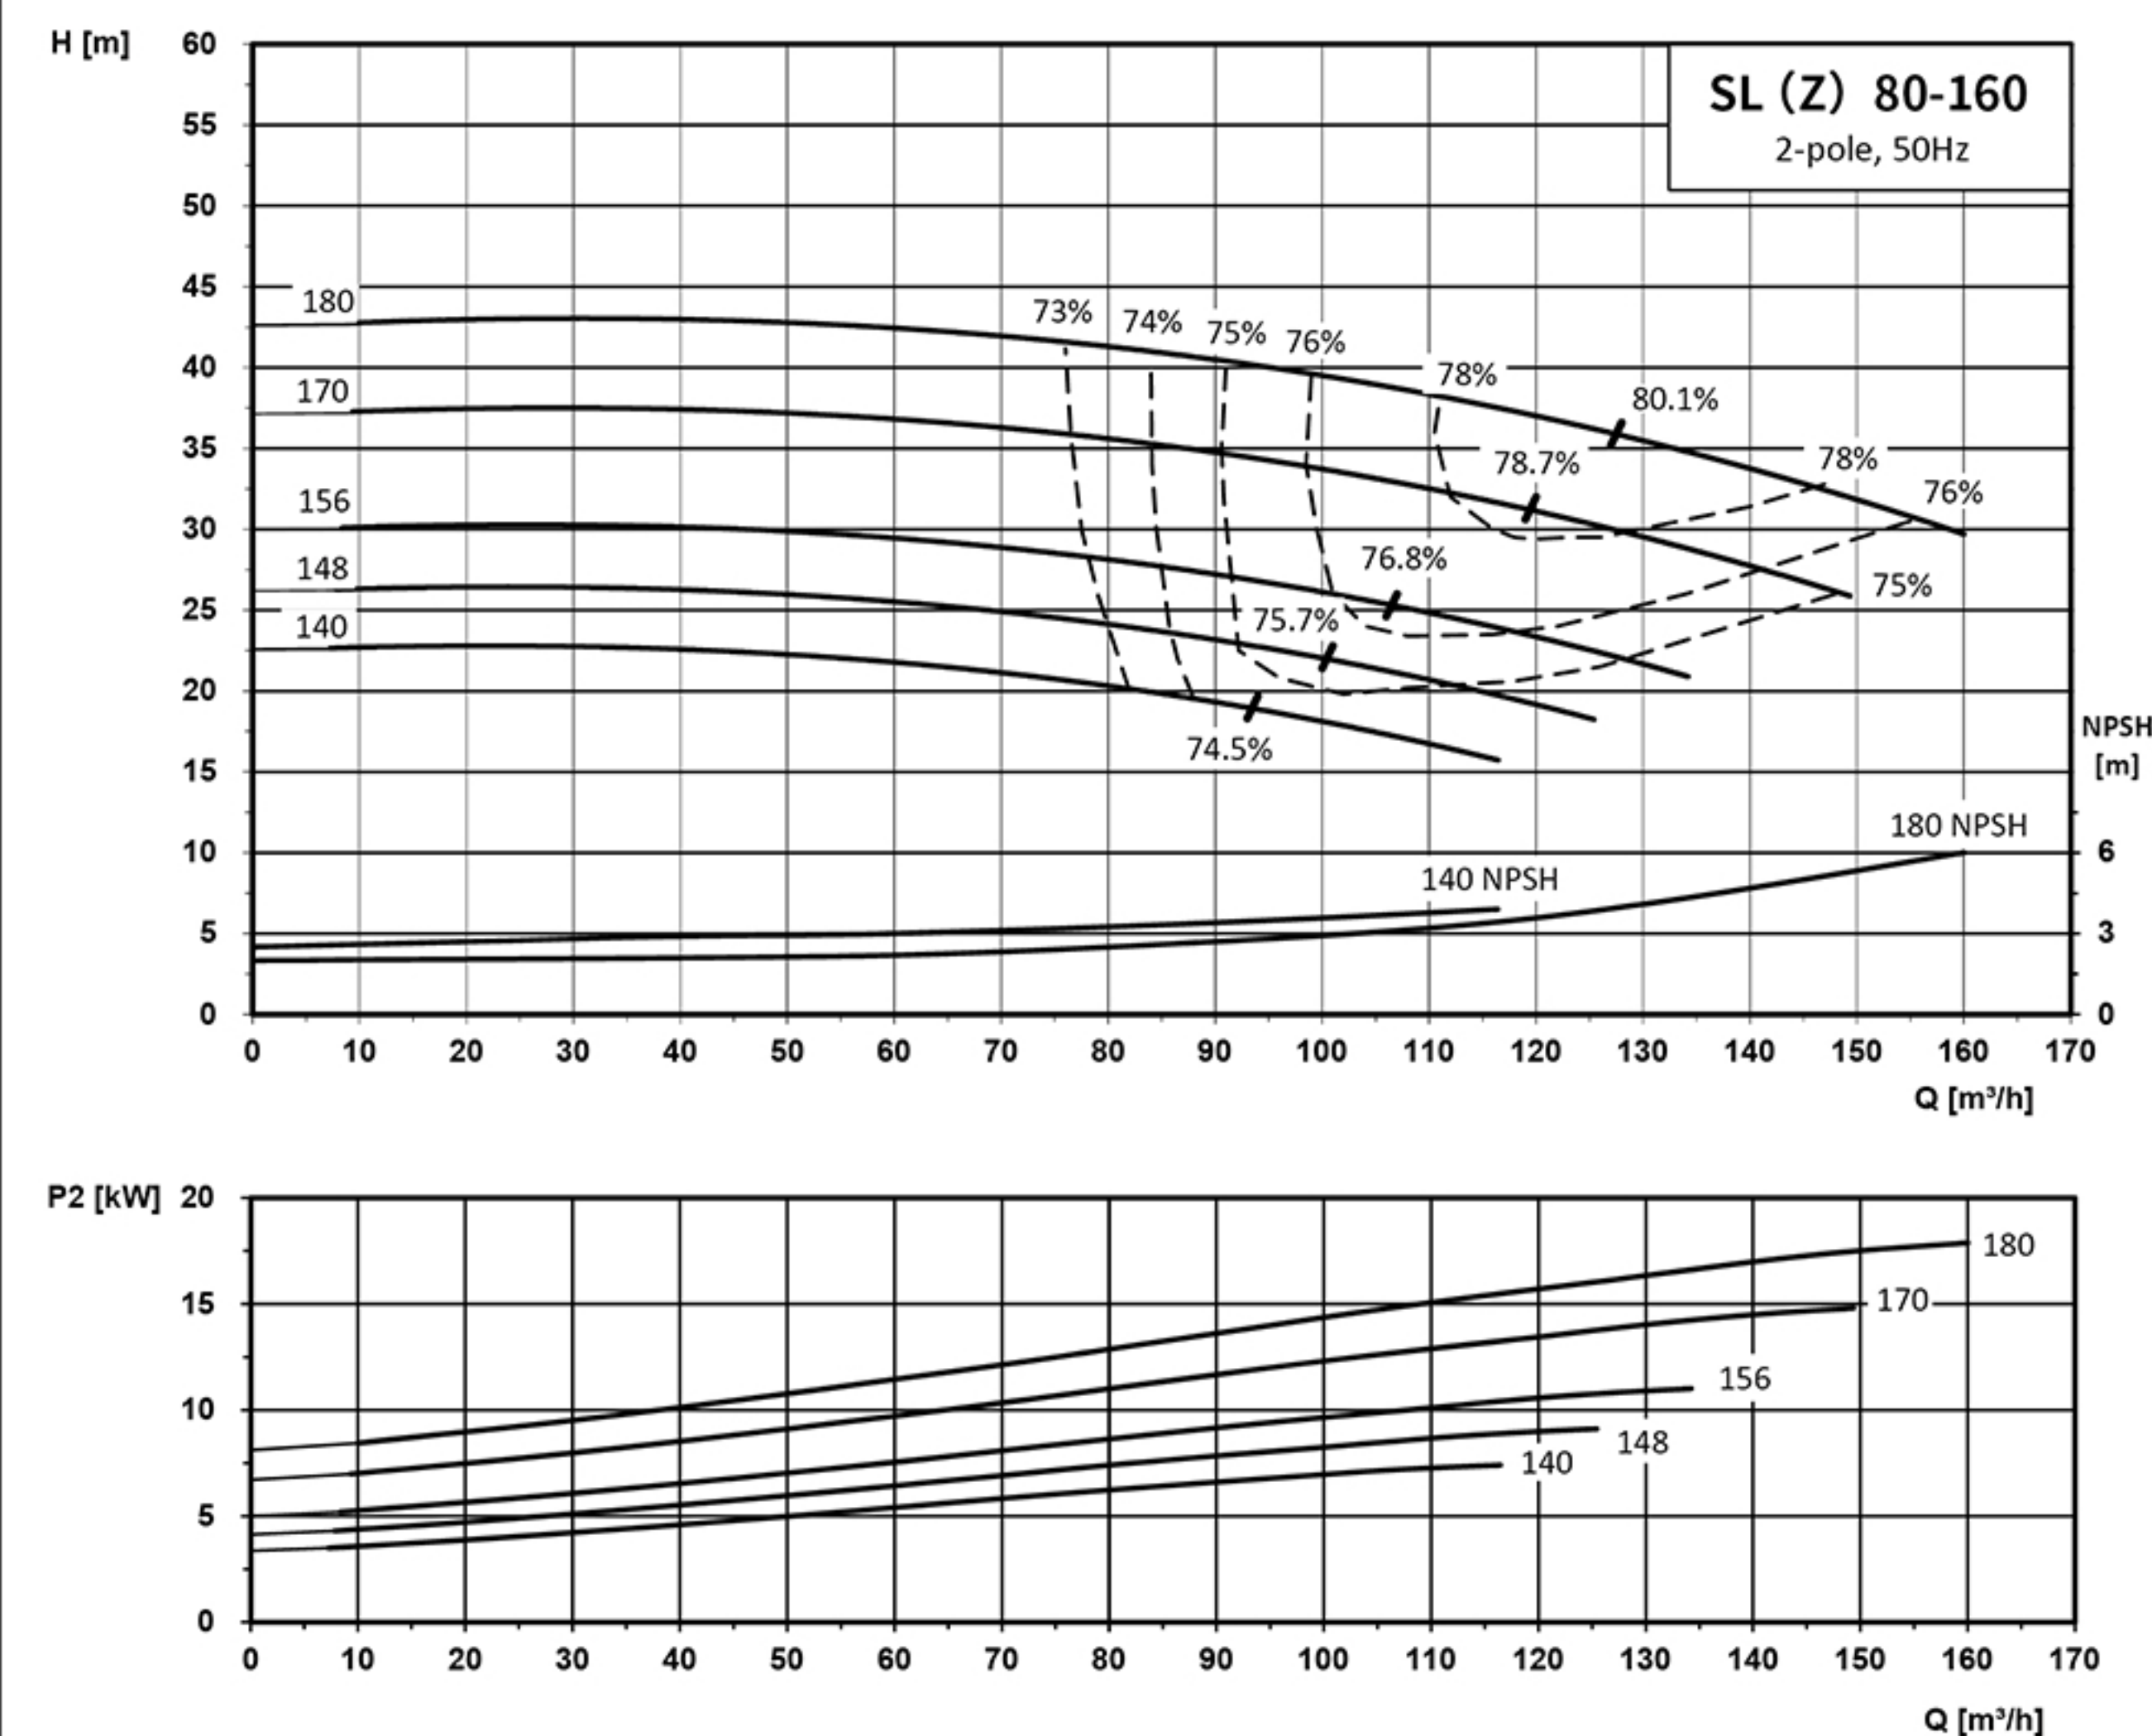


泵型号	Pump Model	SL(Z)80-160-7.5-2	SL(Z)80-160-9.2-2	SL(Z)80-160-11-2	SL(Z)80-160-15-2	SL(Z)80-160-18.5-2
电机型号	Motor Model	YE3-132S2-2	YE3-132L-2	YE3-160M1-2	YE3-160M2-2	YE3-160L-2
电机功率(kW)	Motor Power(kW)	7.5	9.2	11	15	18.5
叶轮直径(mm)	Impeller Diameter(mm)	140	148	156	170	180

SL(Z) 100-160

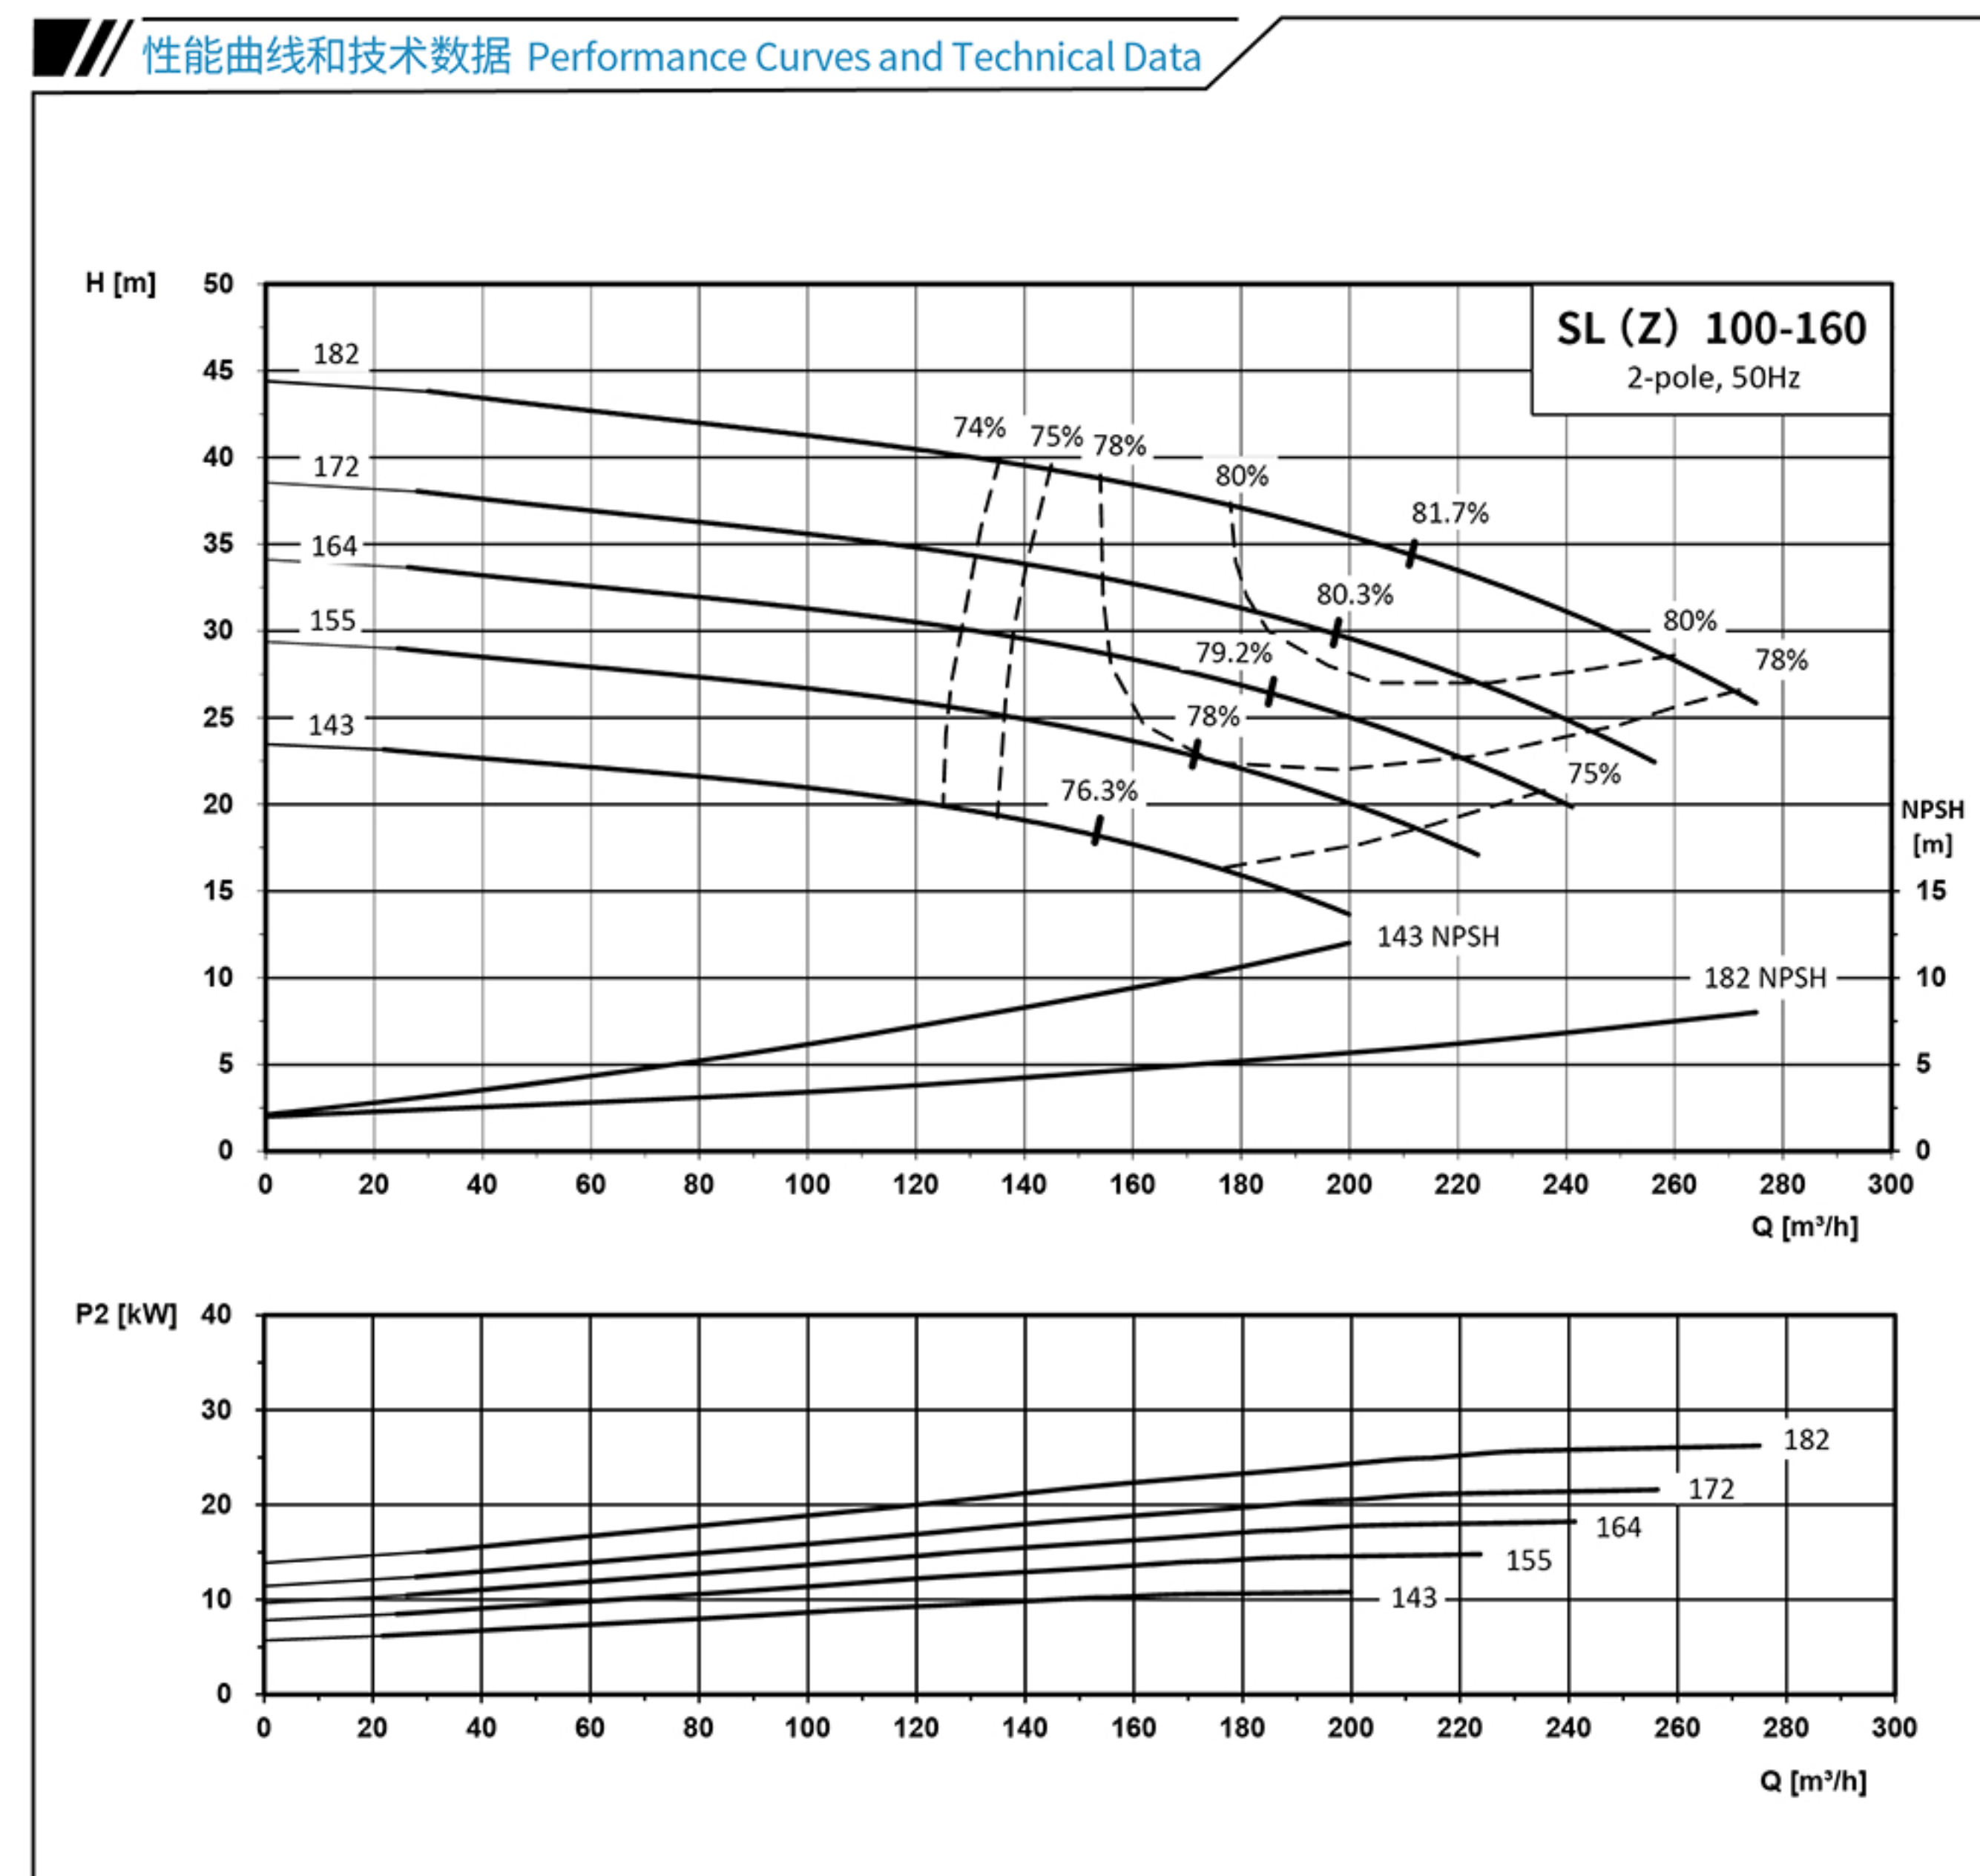


泵型号	Pump Model	SL(Z)100-160-11-2	SL(Z)100-160-15-2	SL(Z)100-160-18.5-2	SL(Z)100-160-22-2	SL(Z)100-160-30-2
电机型号	Motor Model	YE3-160M1-2	YE3-160M2-2	YE3-160L-2	YE3-180M-2	YE3-200L1-2
电机功率(kW)	Motor Power(kW)	11	15	18.5	22	30
叶轮直径(mm)	Impeller Diameter(mm)	143	155	164	172	182

SL(Z) 125-160

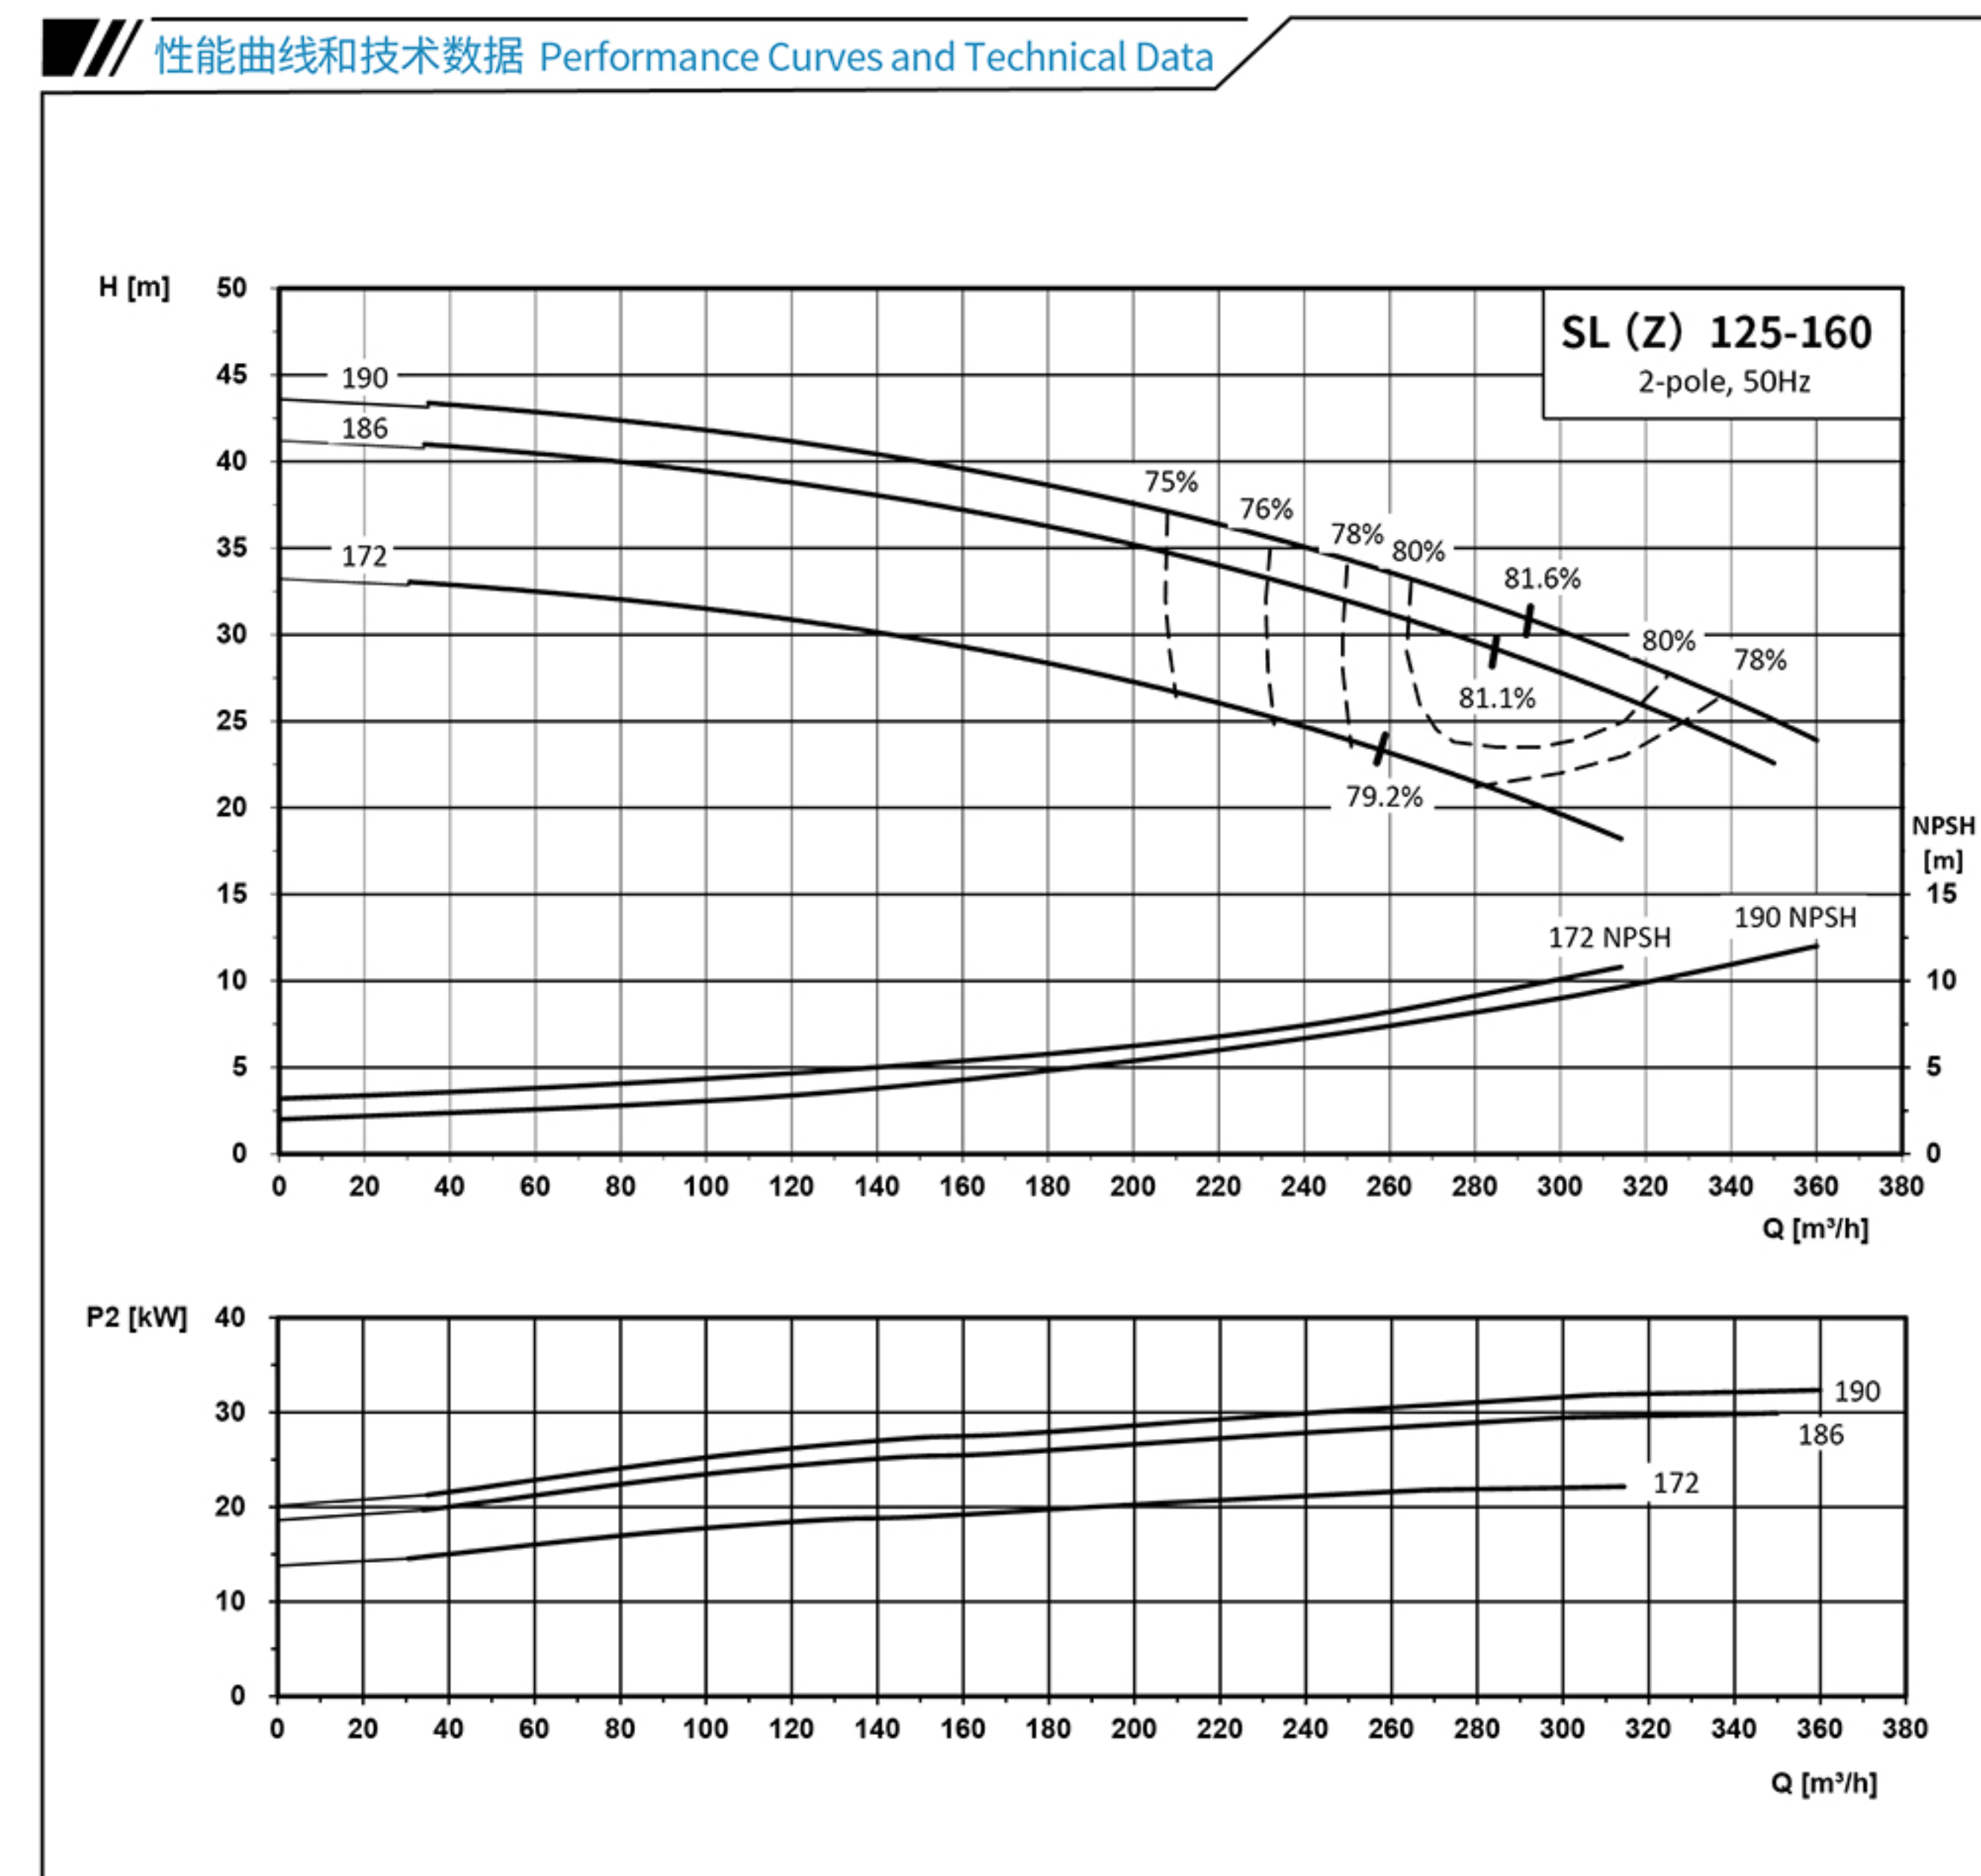


泵型号	Pump Model	SL(Z)125-160-22-2	SL(Z)125-160-30-2	SL(Z)125-160-37-2
电机型号	Motor Model	YE3-180M-2	YE3-200L1-2	YE3-200L2-2
电机功率(kW)	Motor Power(kW)	22	30	37
叶轮直径(mm)	Impeller Diameter(mm)	172	186	190

SL(Z) 32-200

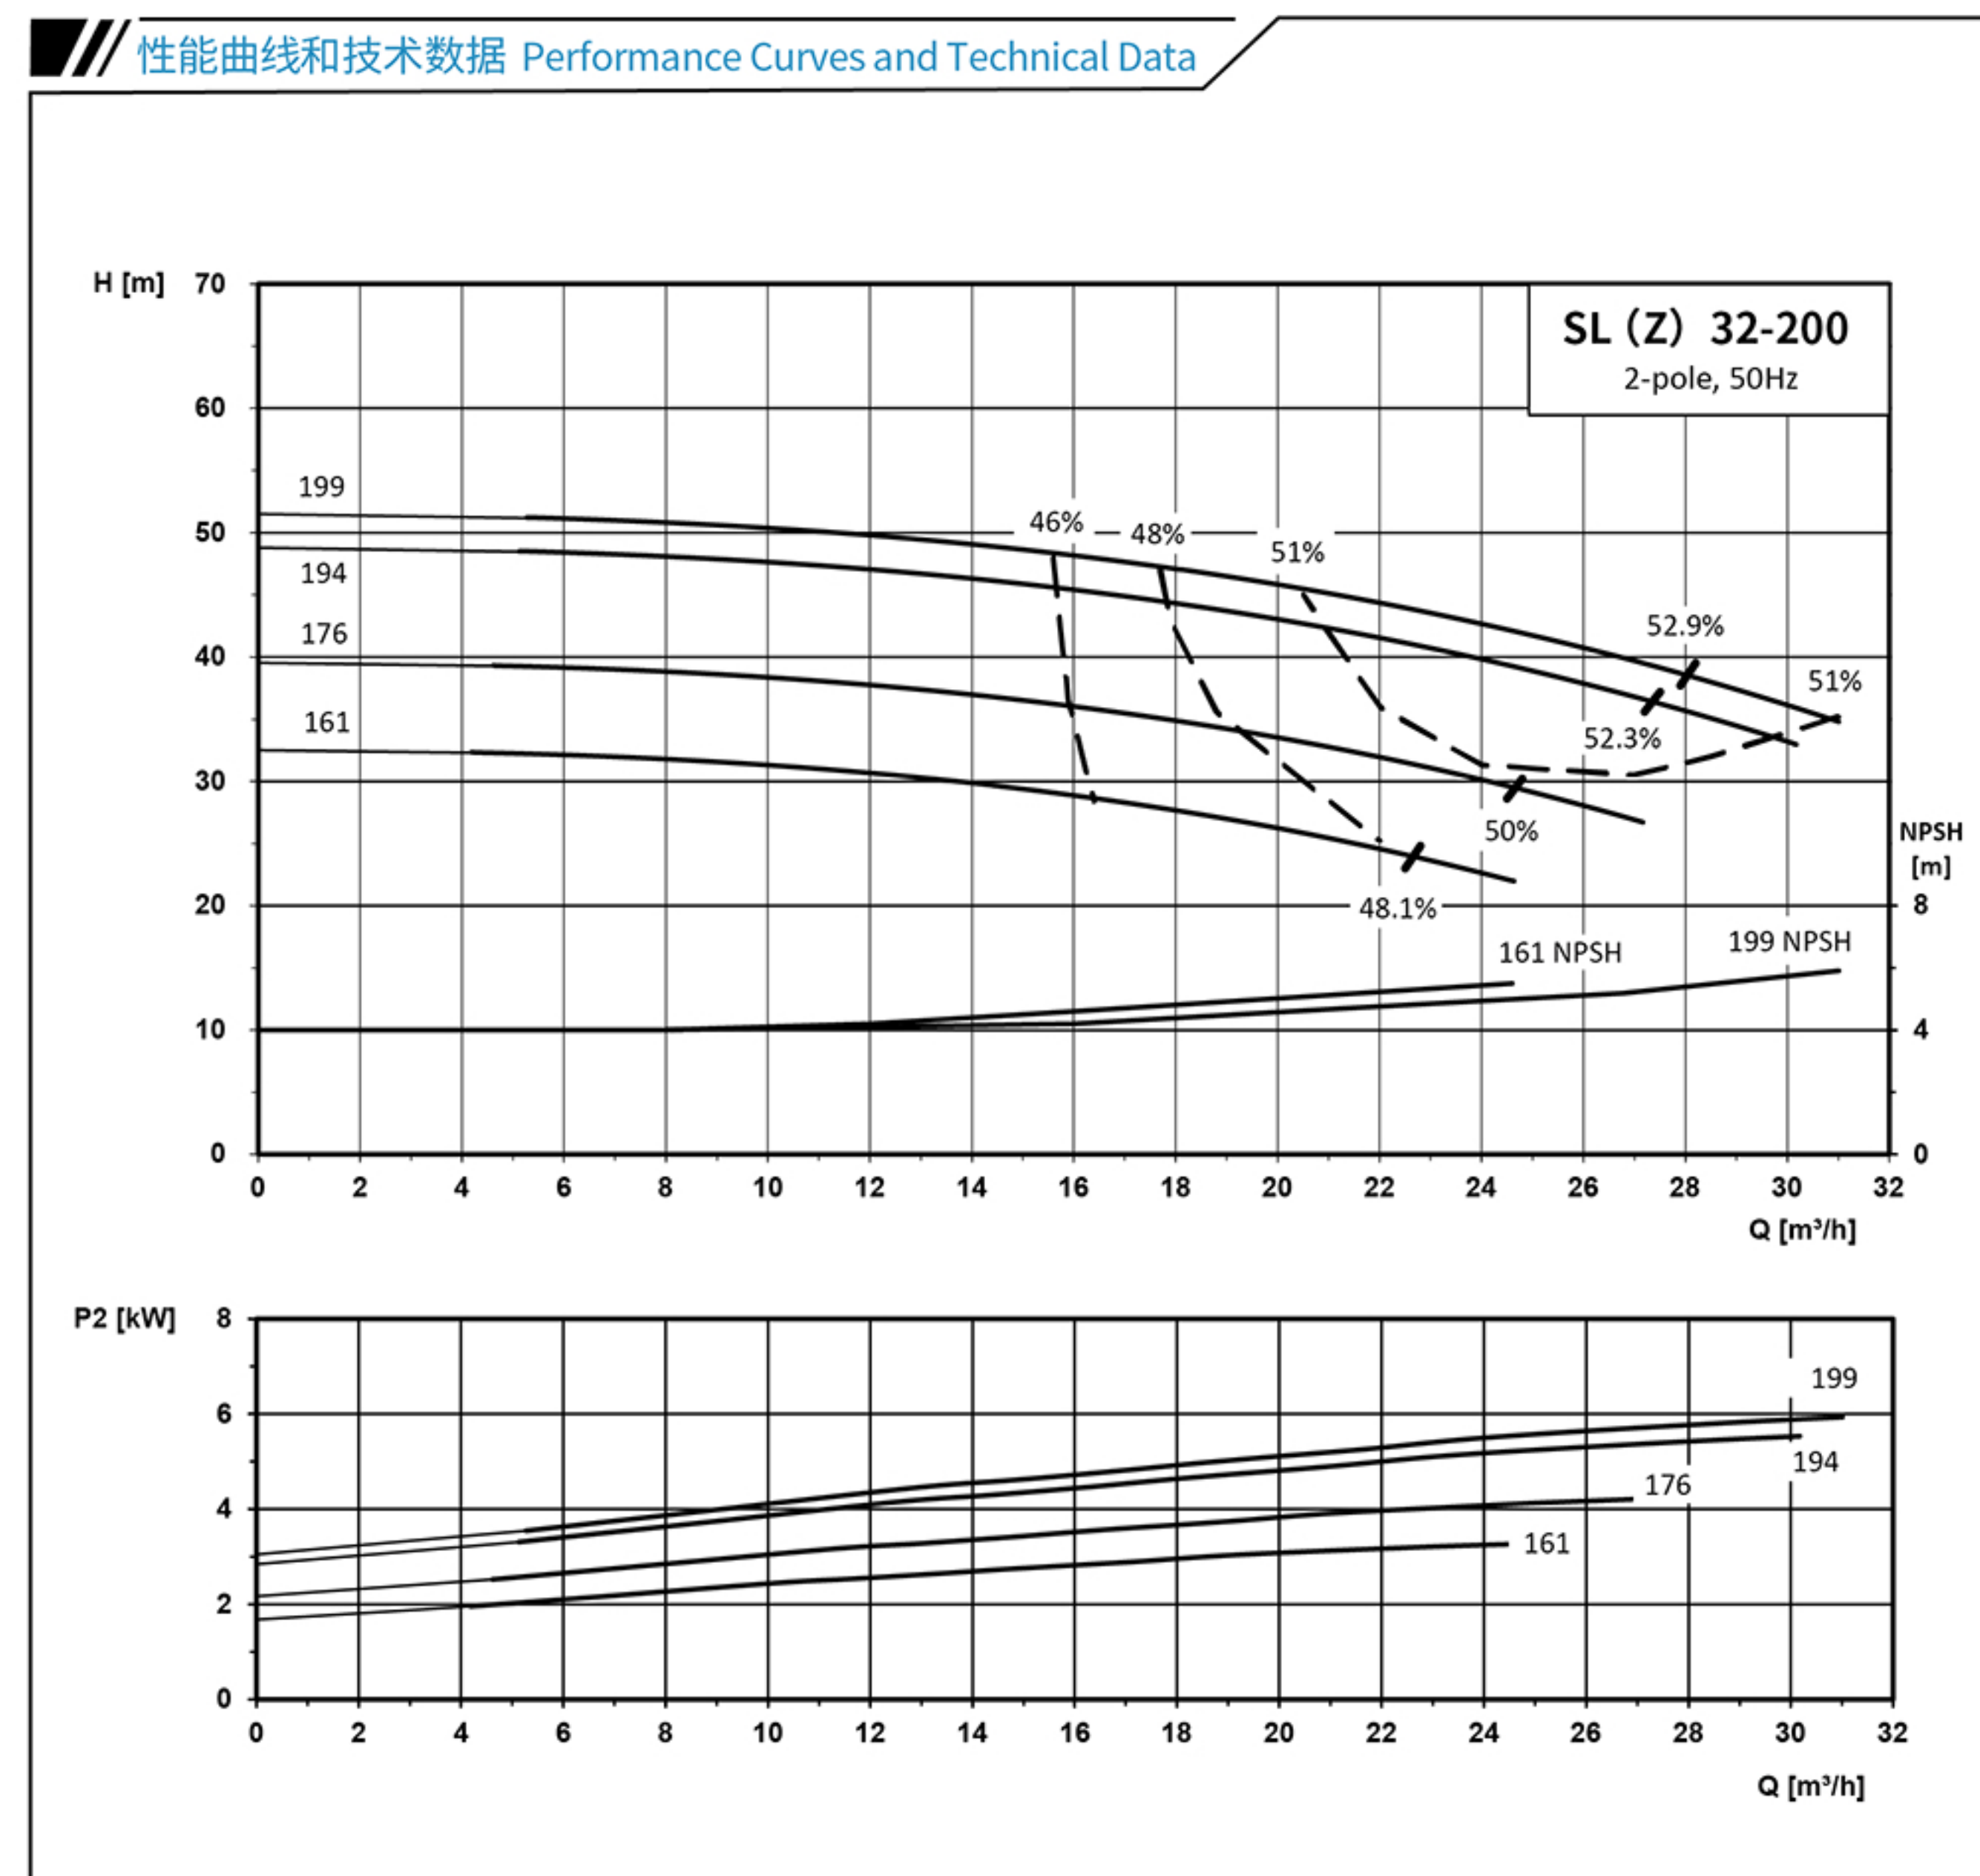


泵型号	Pump Model	SL(Z)32-200-3-2	SL(Z)32-200-4-2	SL(Z)32-200-5.5-2	SL(Z)32-200-7.5-2
电机型号	Motor Model	YE3-100L-2	YE3-112M-2	YE3-132S1-2	YE3-132S2-2
电机功率(kW)	Motor Power(kW)	3	4	5.5	7.5
叶轮直径(mm)	Impeller Diameter(mm)	161	176	194	199

SL(Z) 40-200

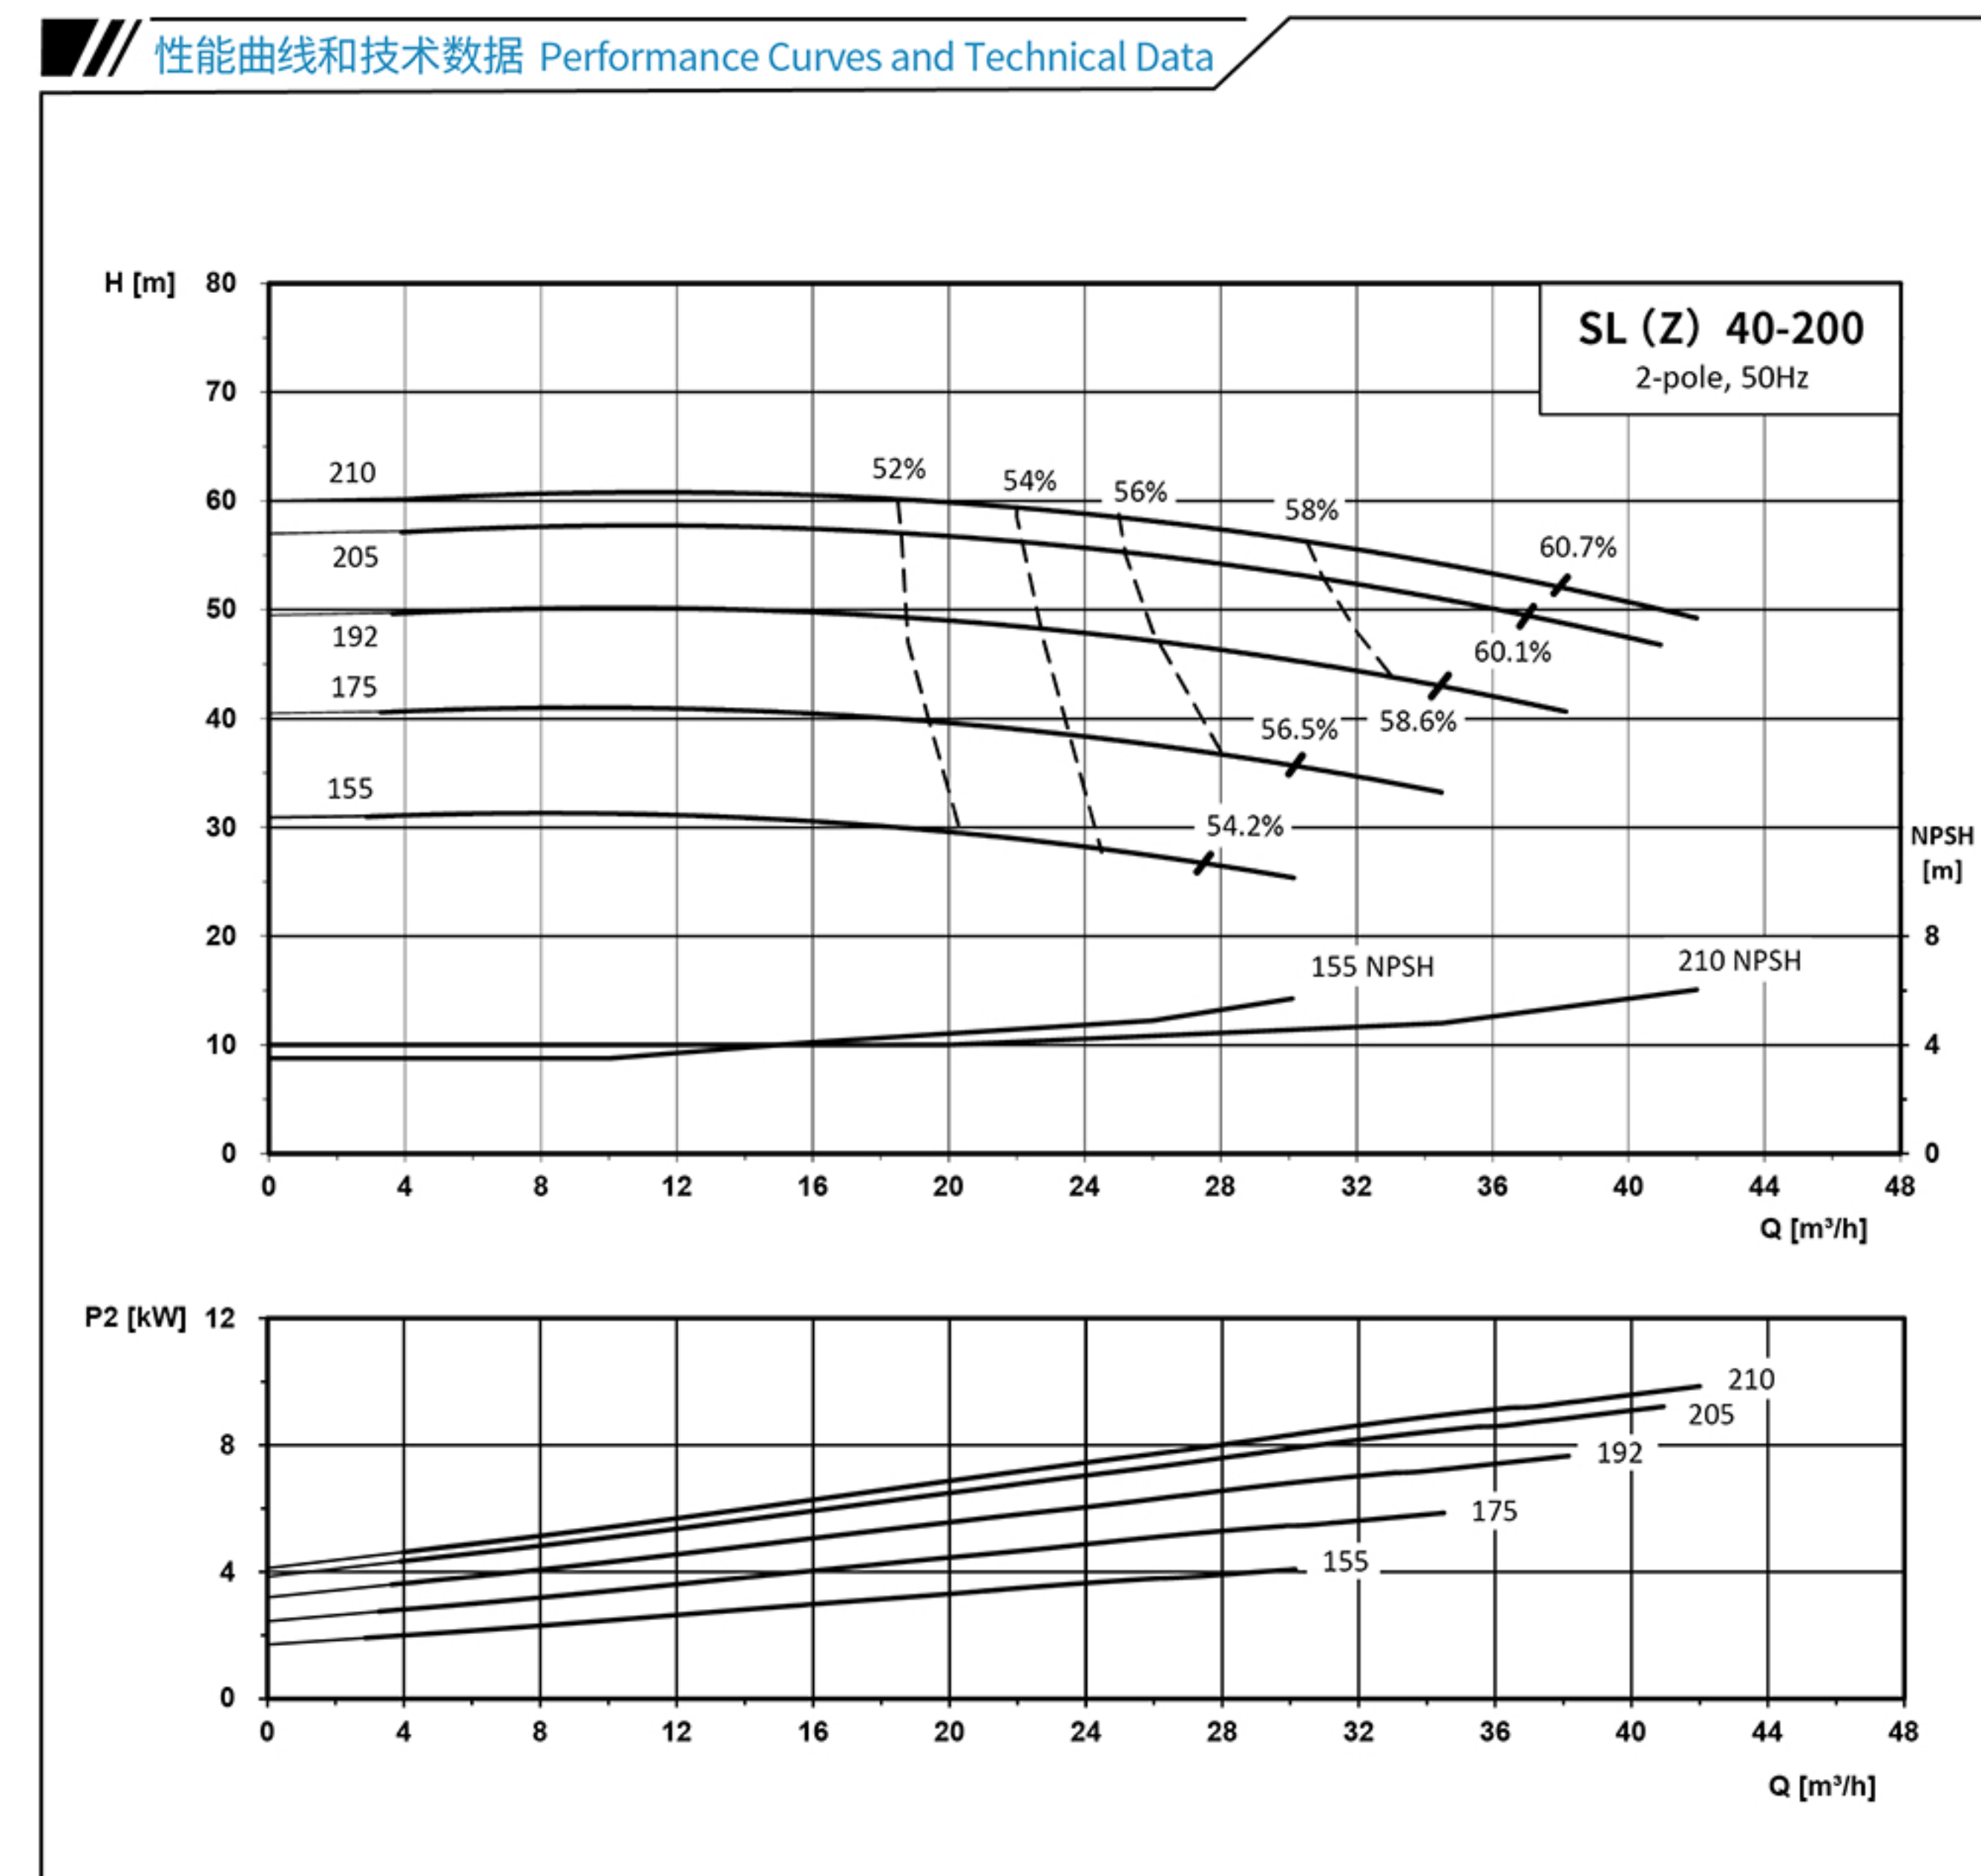


泵型号	Pump Model	SL(Z)40-200-4-2	SL(Z)40-200-5.5-2	SL(Z)40-200-7.5-2	SL(Z)40-200-9.2-2	SL(Z)40-200-11-2
电机型号	Motor Model	YE3-112M-2	YE3-132S1-2	YE3-132S2-2	YE3-132L-2	YE3-160M1-2
电机功率(kW)	Motor Power(kW)	4	5.5	7.5	9.2	11
叶轮直径(mm)	Impeller Diameter(mm)	155	175	192	205	210

SL(Z) 50-200

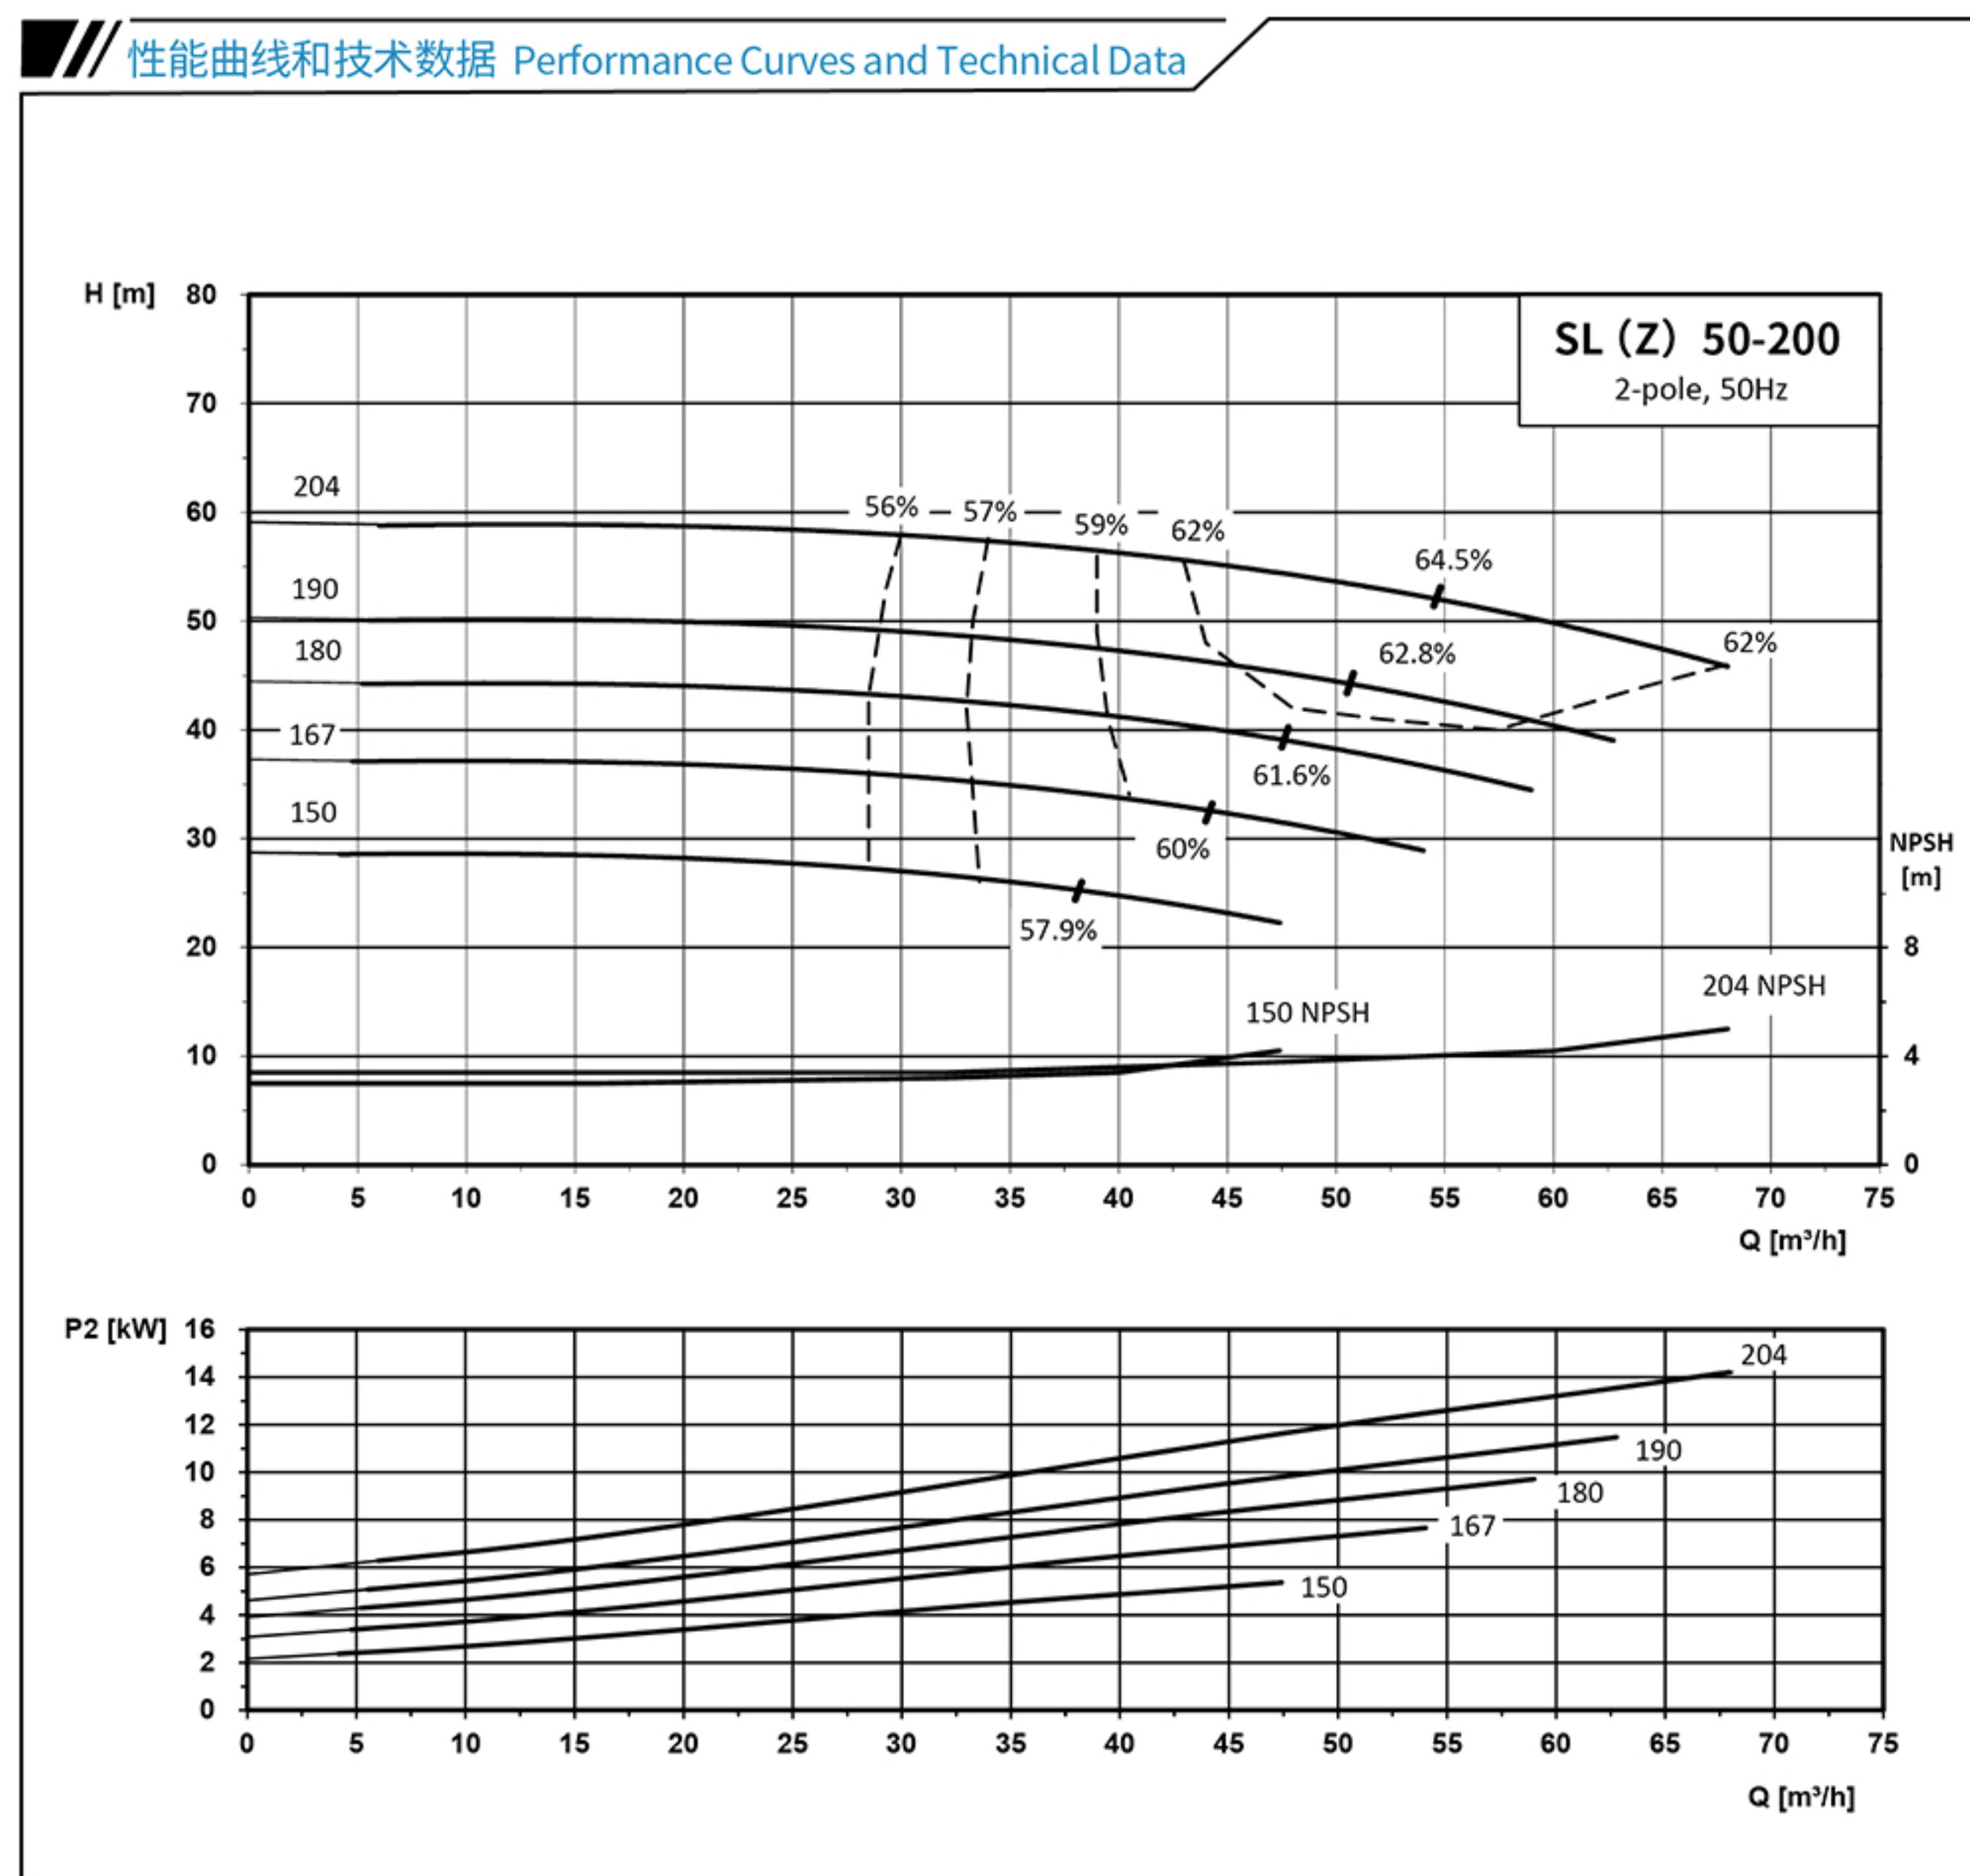


泵型号	Pump Model	SL(Z)50-200-5.5-2	SL(Z)50-200-7.5-2	SL(Z)50-200-9.2-2	SL(Z)50-200-11-2	SL(Z)50-200-15-2
电机型号	Motor Model	YE3-132S1-2	YE3-132S2-2	YE3-132L-2	YE3-160M1-2	YE3-160M2-2
电机功率(kW)	Motor Power(kW)	5.5	7.5	9.2	11	15
叶轮直径(mm)	Impeller Diameter(mm)	150	167	180	190	204

SL(Z) 65-200

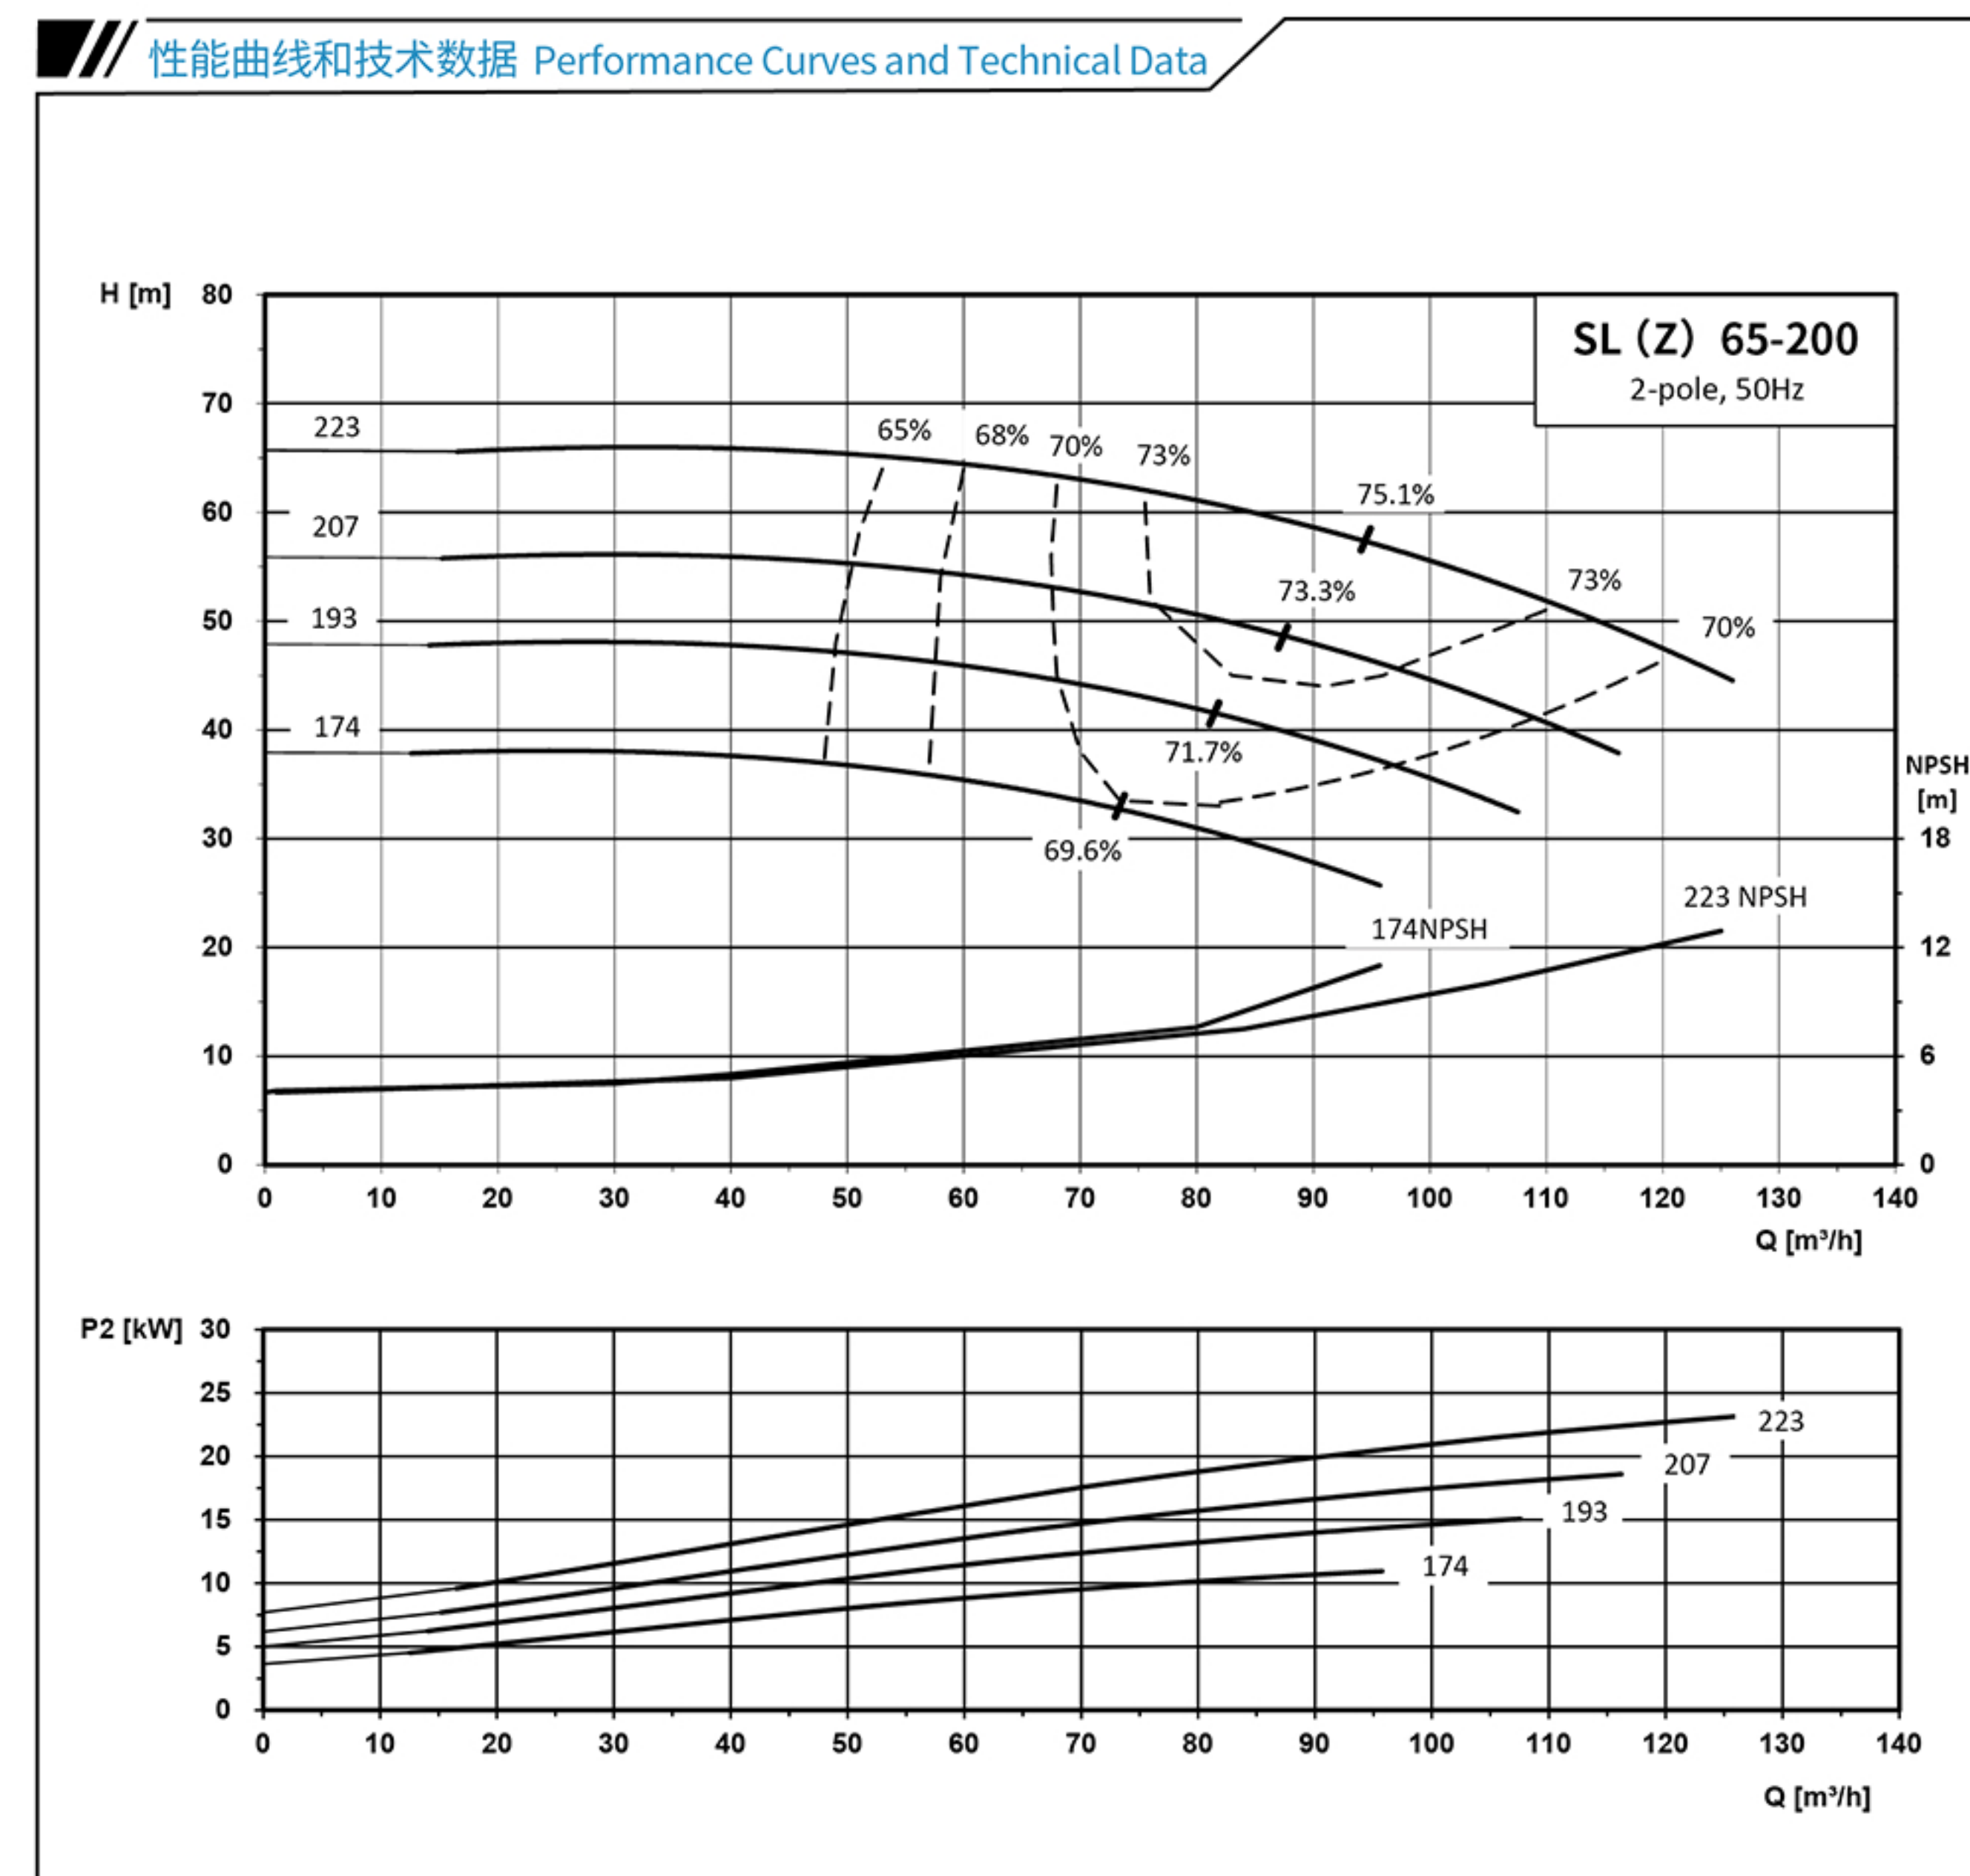


泵型号	Pump Model	SL(Z)65-200-11-2	SL(Z)65-200-15-2	SL(Z)65-200-18.5-2	SL(Z)65-200-22-2
电机型号	Motor Model	YE3-160M1-2	YE3-160M2-2	YE3-160L-2	YE3-180M-2
电机功率(kW)	Motor Power(kW)	11	15	18.5	22
叶轮直径(mm)	Impeller Diameter(mm)	174	193	207	223

SL(Z) 80-200

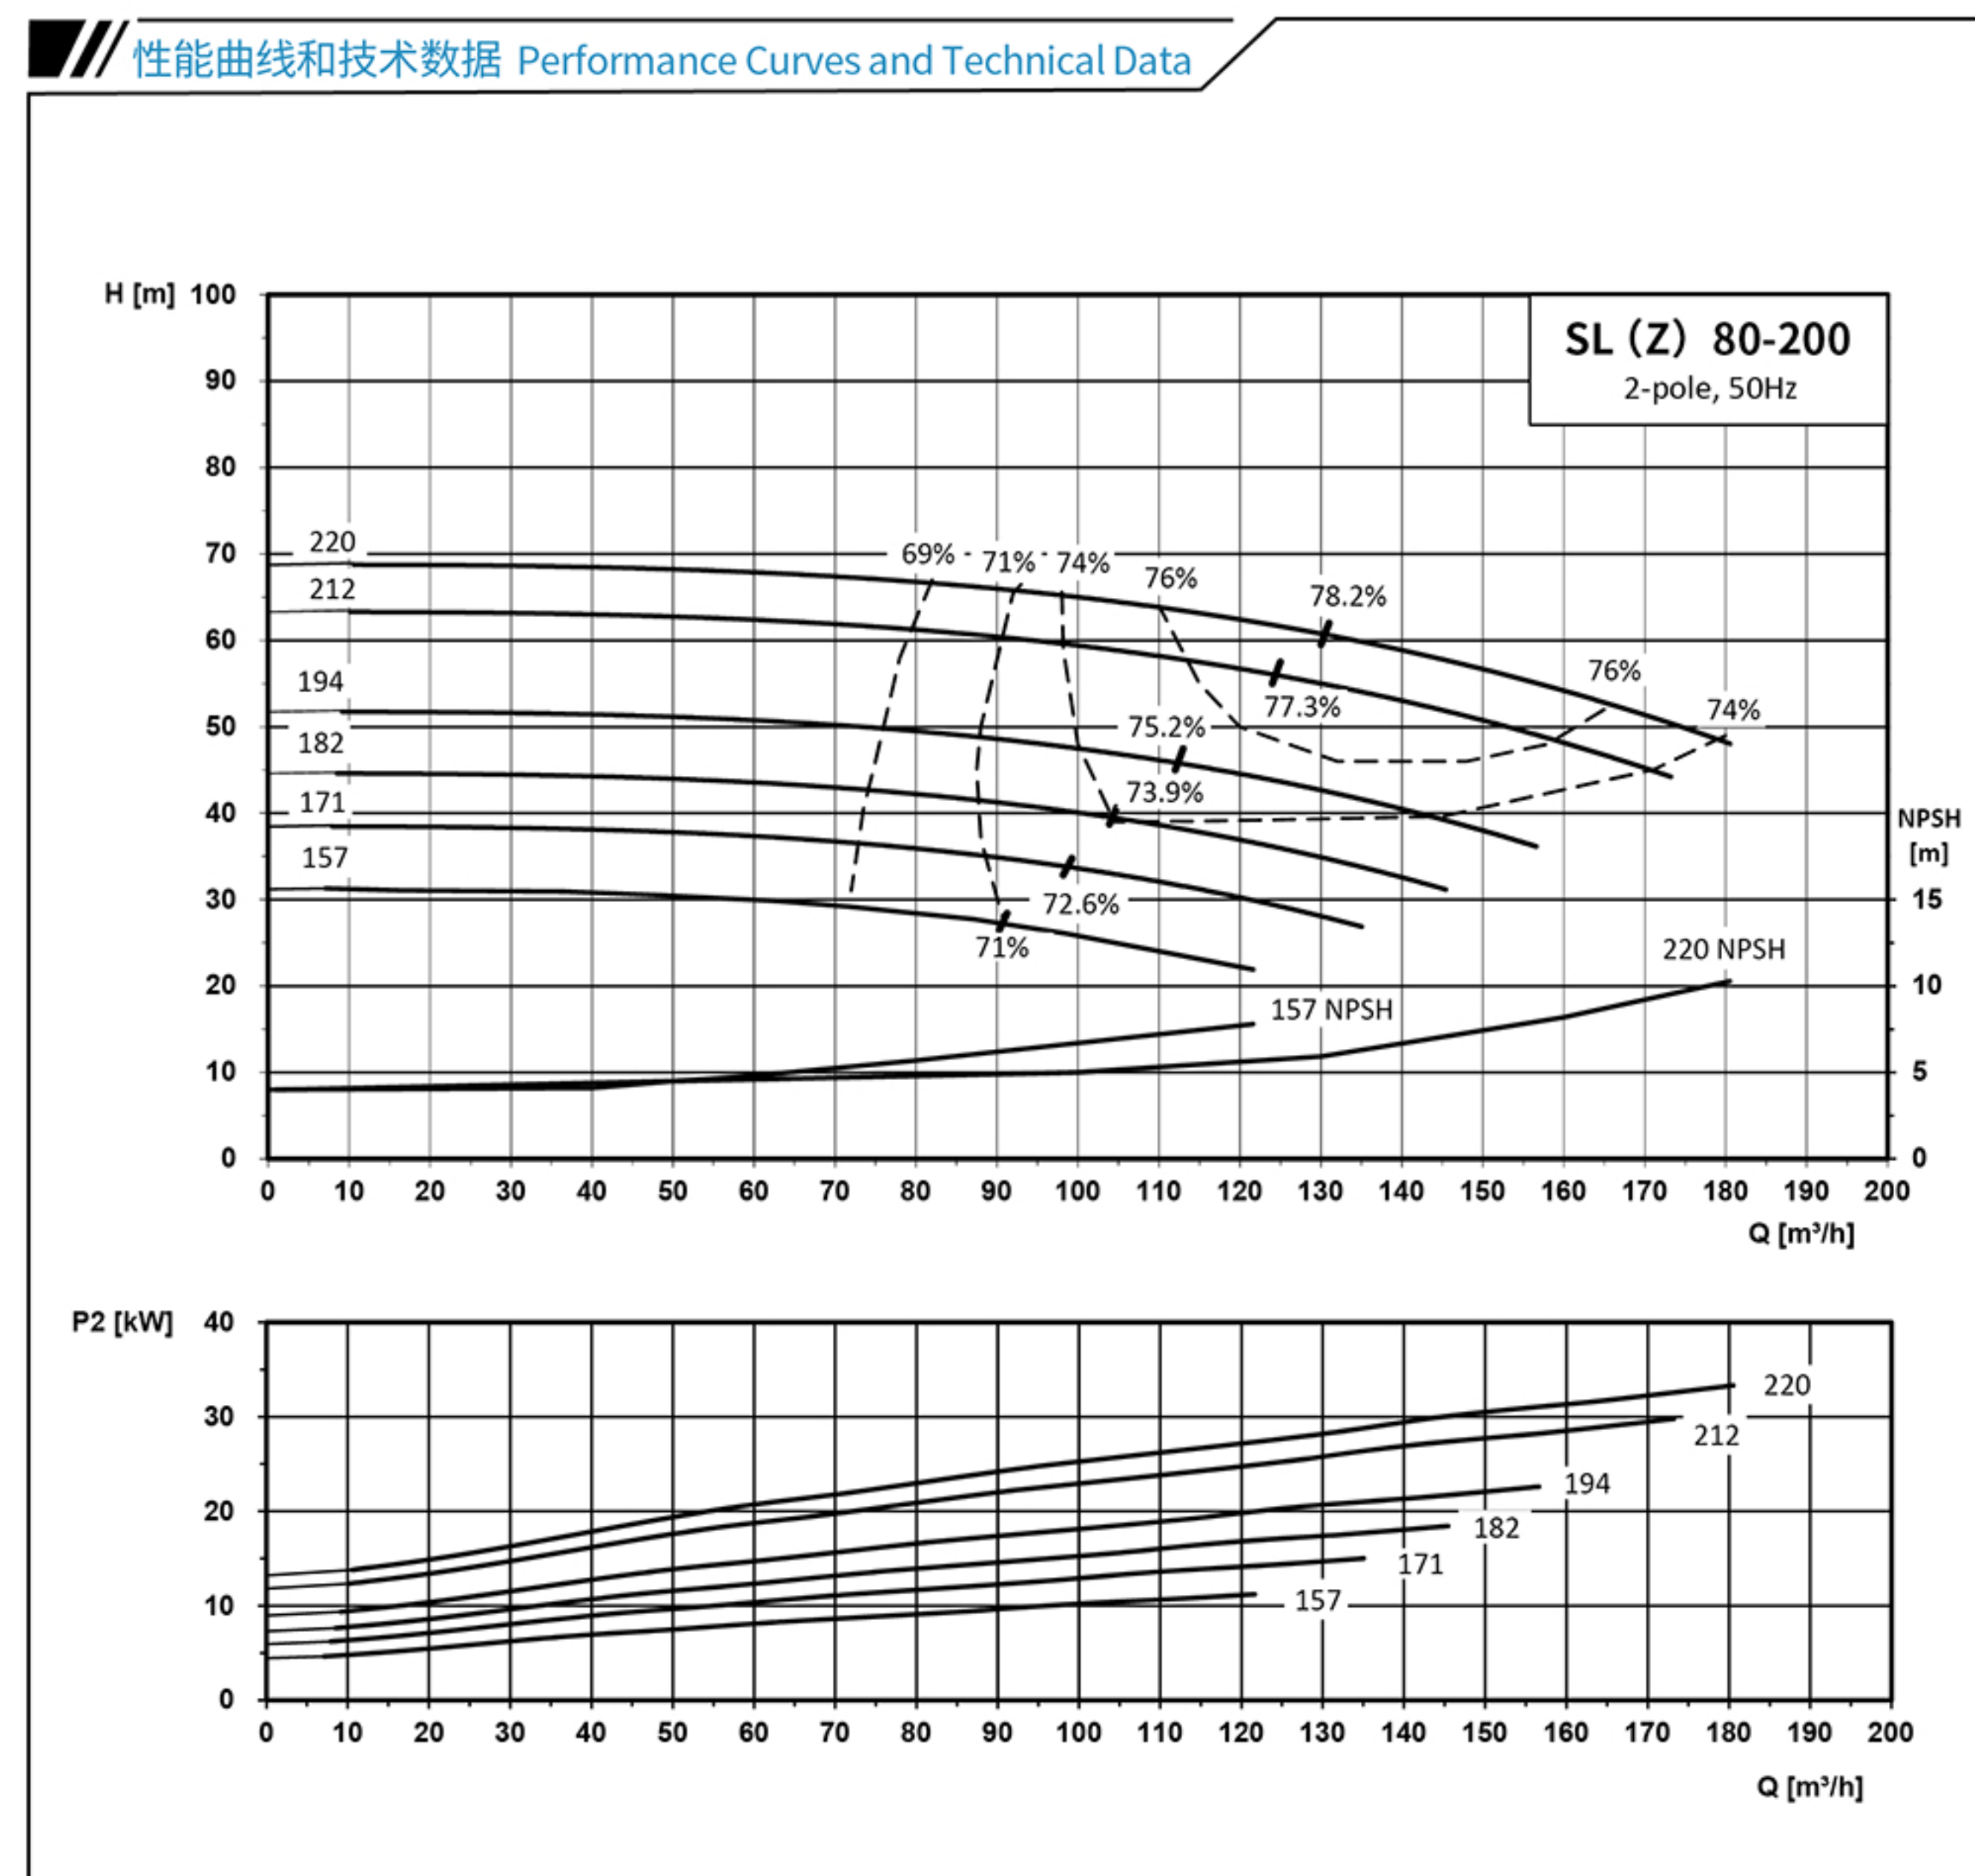


泵型号	Pump Model	SL(Z) 80-200-11-2	SL(Z) 80-200-15-2	SL(Z) 80-200-18.5-2	SL(Z) 80-200-22-2	SL(Z) 80-200-30-2	SL(Z) 80-200-37-2
电机型号	Motor Model	YE3-160M1-2	YE3-160M2-2	YE3-160L-2	YE3-180M-2	YE3-200L1-2	YE3-200L2-2
电机功率(kW)	Motor Power(kW)	11	15	18.5	22	30	37
叶轮直径(mm)	Impeller Diameter(mm)	157	171	182	194	212	220

SL(Z) 100-200

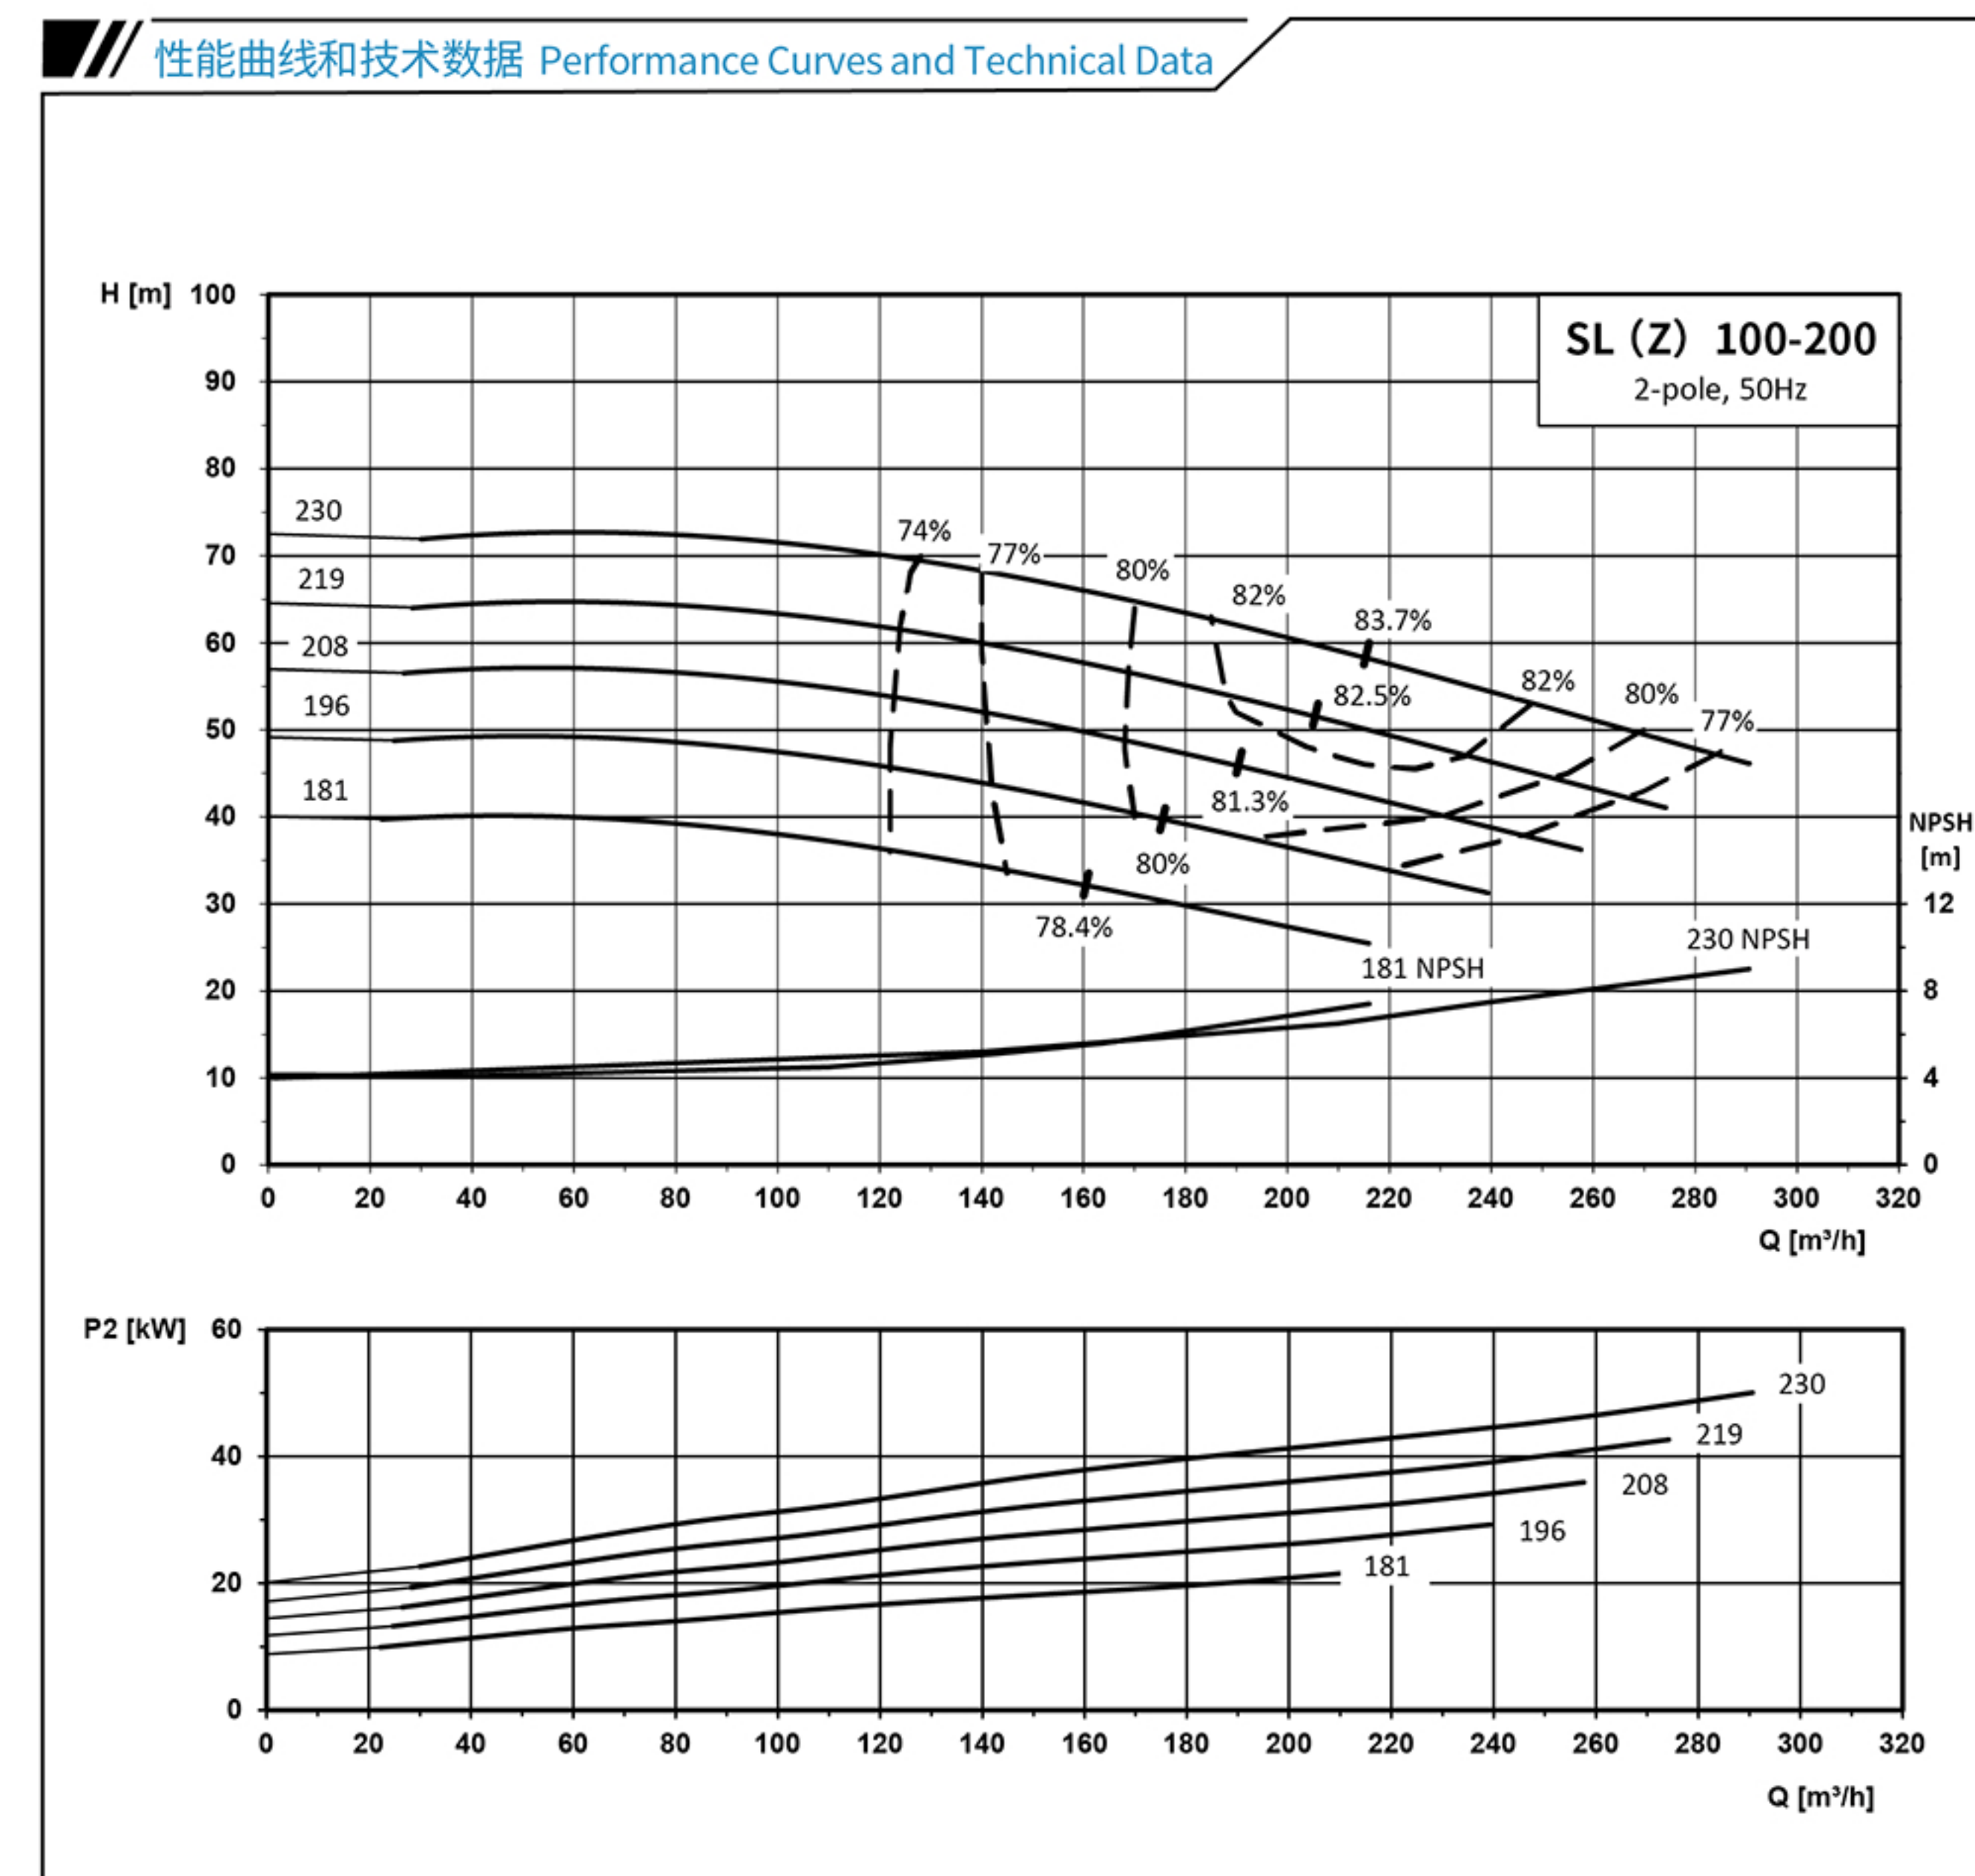


泵型号	Pump Model	SL(Z)100-200-22-2	SL(Z)100-200-30-2	SL(Z)100-200-37-2	SL(Z)100-200-45-2	SL(Z)100-200-55-2
电机型号	Motor Model	YE3-180M-2	YE3-200L1-2	YE3-200L2-2	YE3-225M-2	YE3-250M-2
电机功率(kW)	Motor Power(kW)	22	30	37	45	55
叶轮直径(mm)	Impeller Diameter(mm)	181	196	208	219	230

SL(Z) 125-200

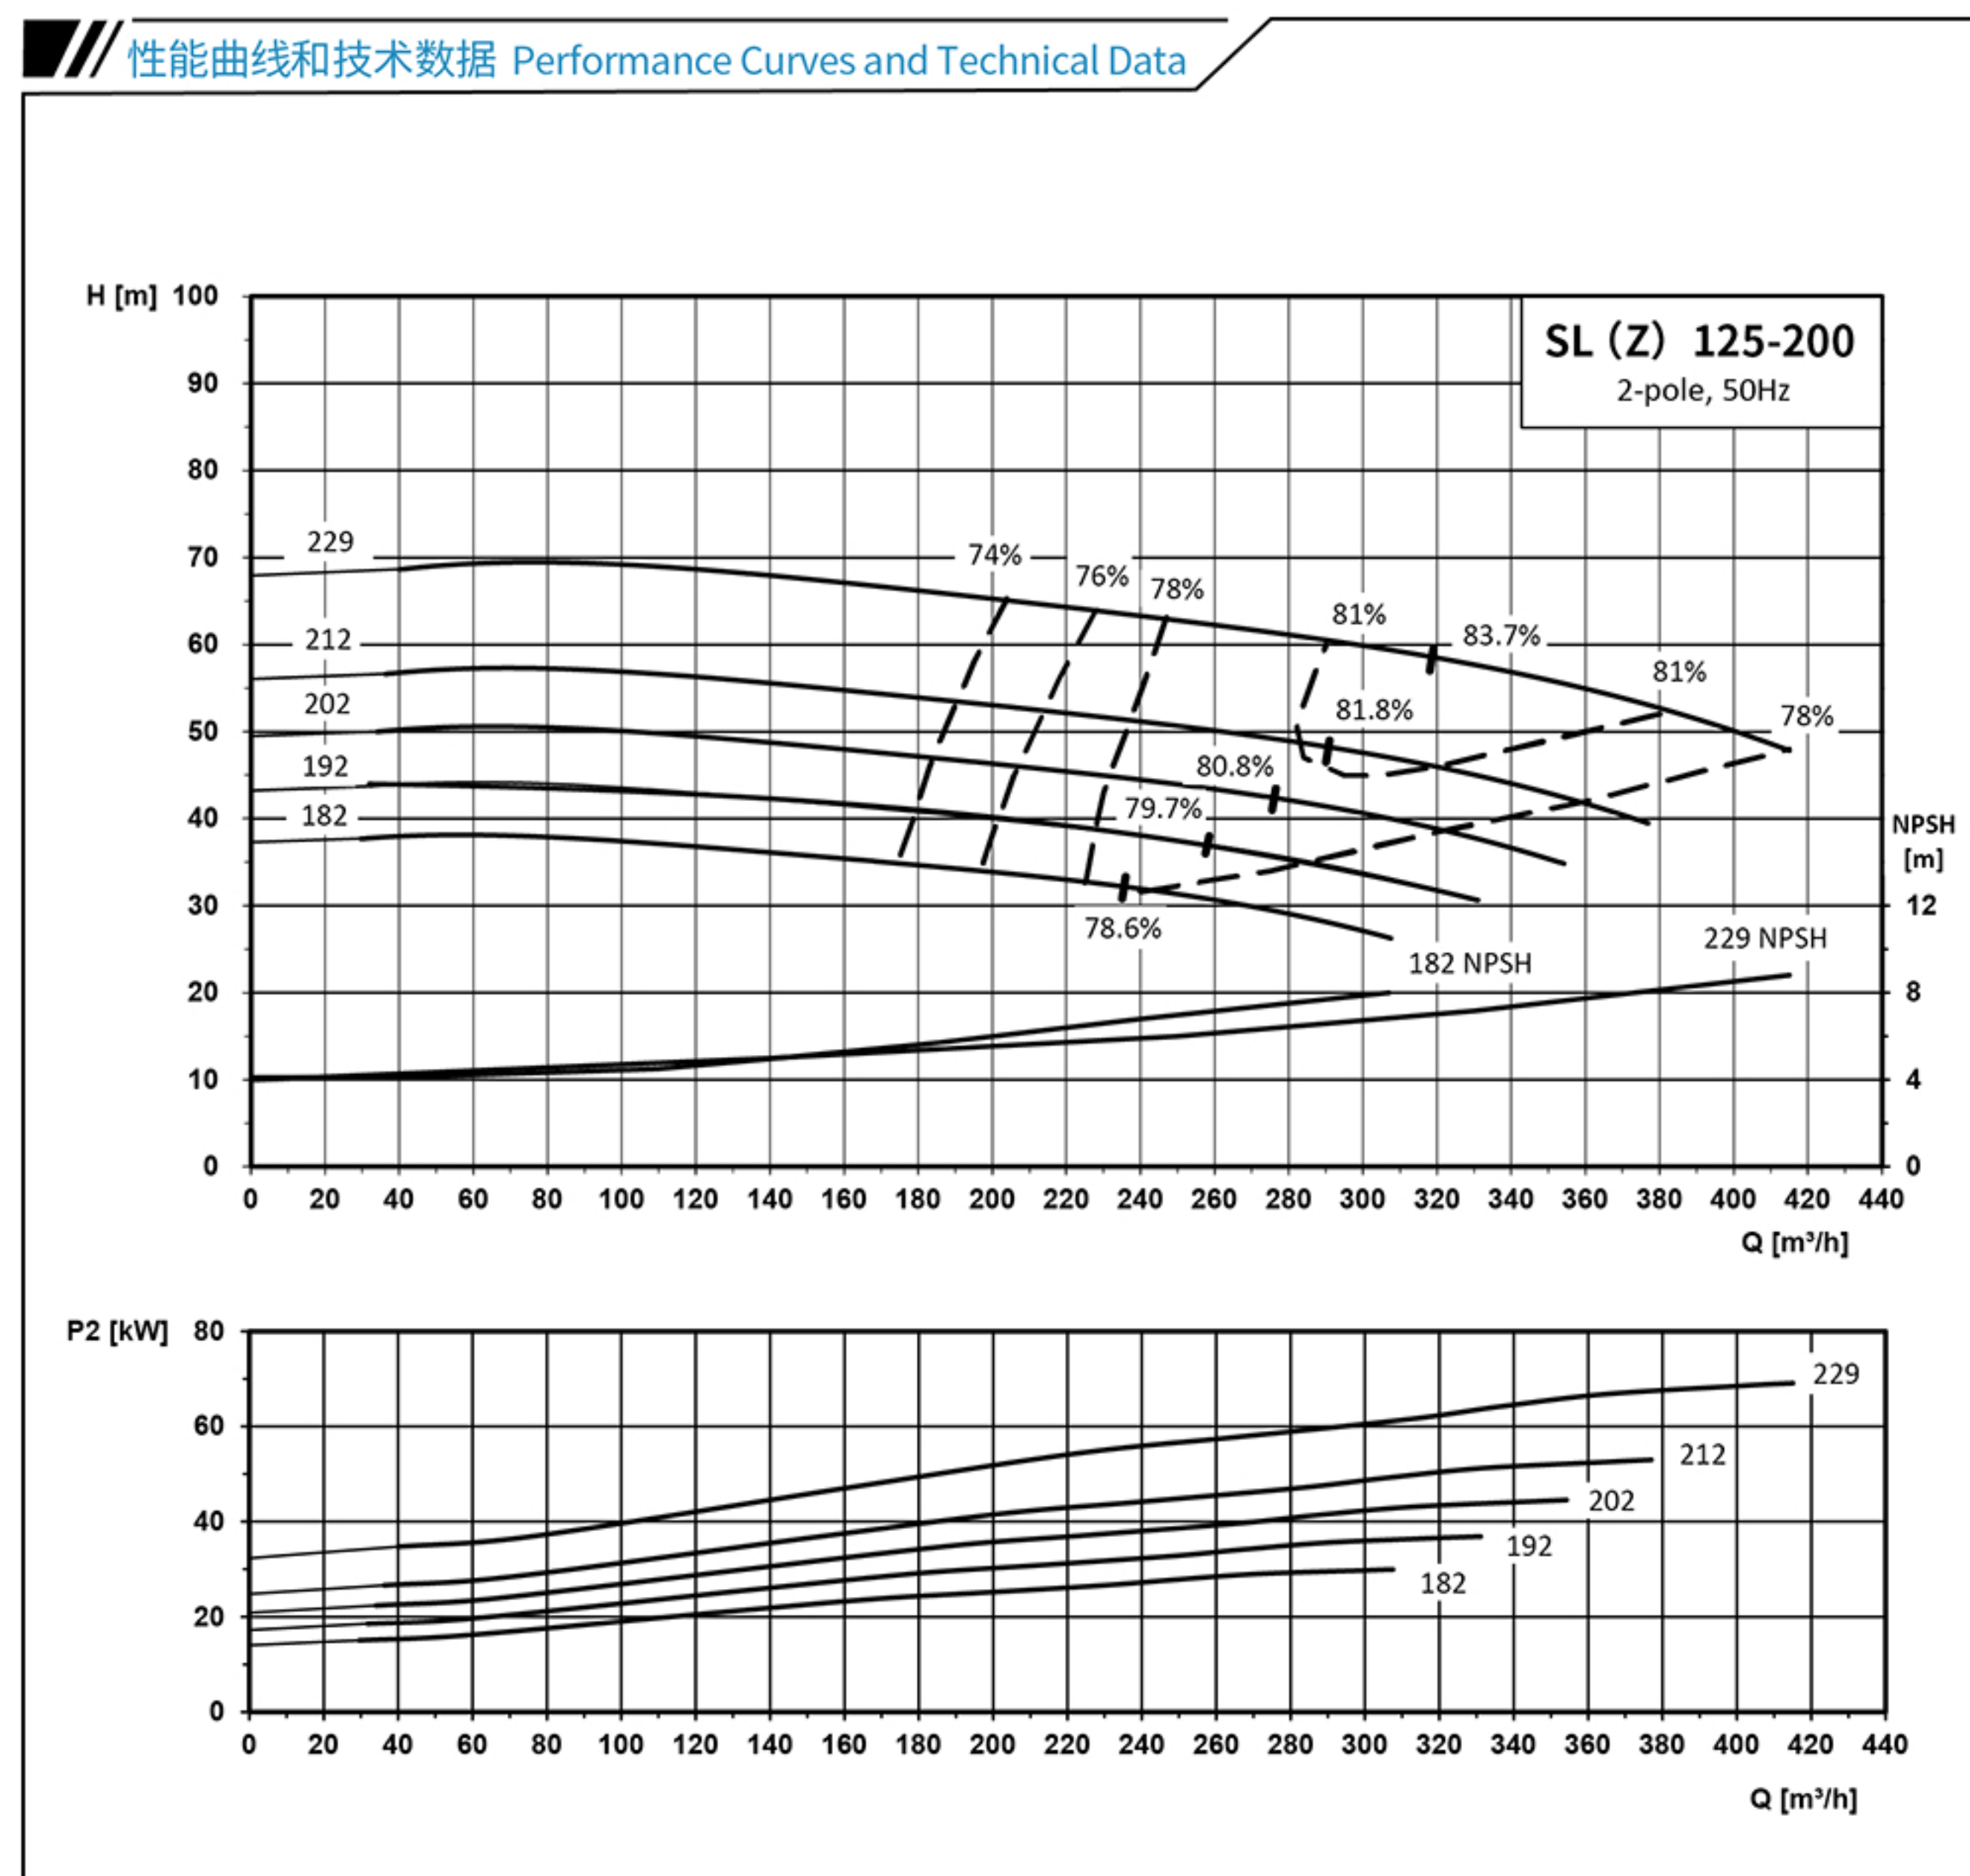

泵型号	Pump Model	SL(Z)125-200-30-2	SL(Z)125-200-37-2	SL(Z)125-200-45-2	SL(Z)125-200-55-2	SL(Z)125-200-75-2
电机型号	Motor Model	YE3-200L1-2	YE3-200L2-2	YE3-225M-2	YE3-250M-2	YE3-280S-2
电机功率(kW)	Motor Power(kW)	30	37	45	55	75
叶轮直径(mm)	Impeller Diameter(mm)	182	192	202	212	229


SL(Z) 150-200

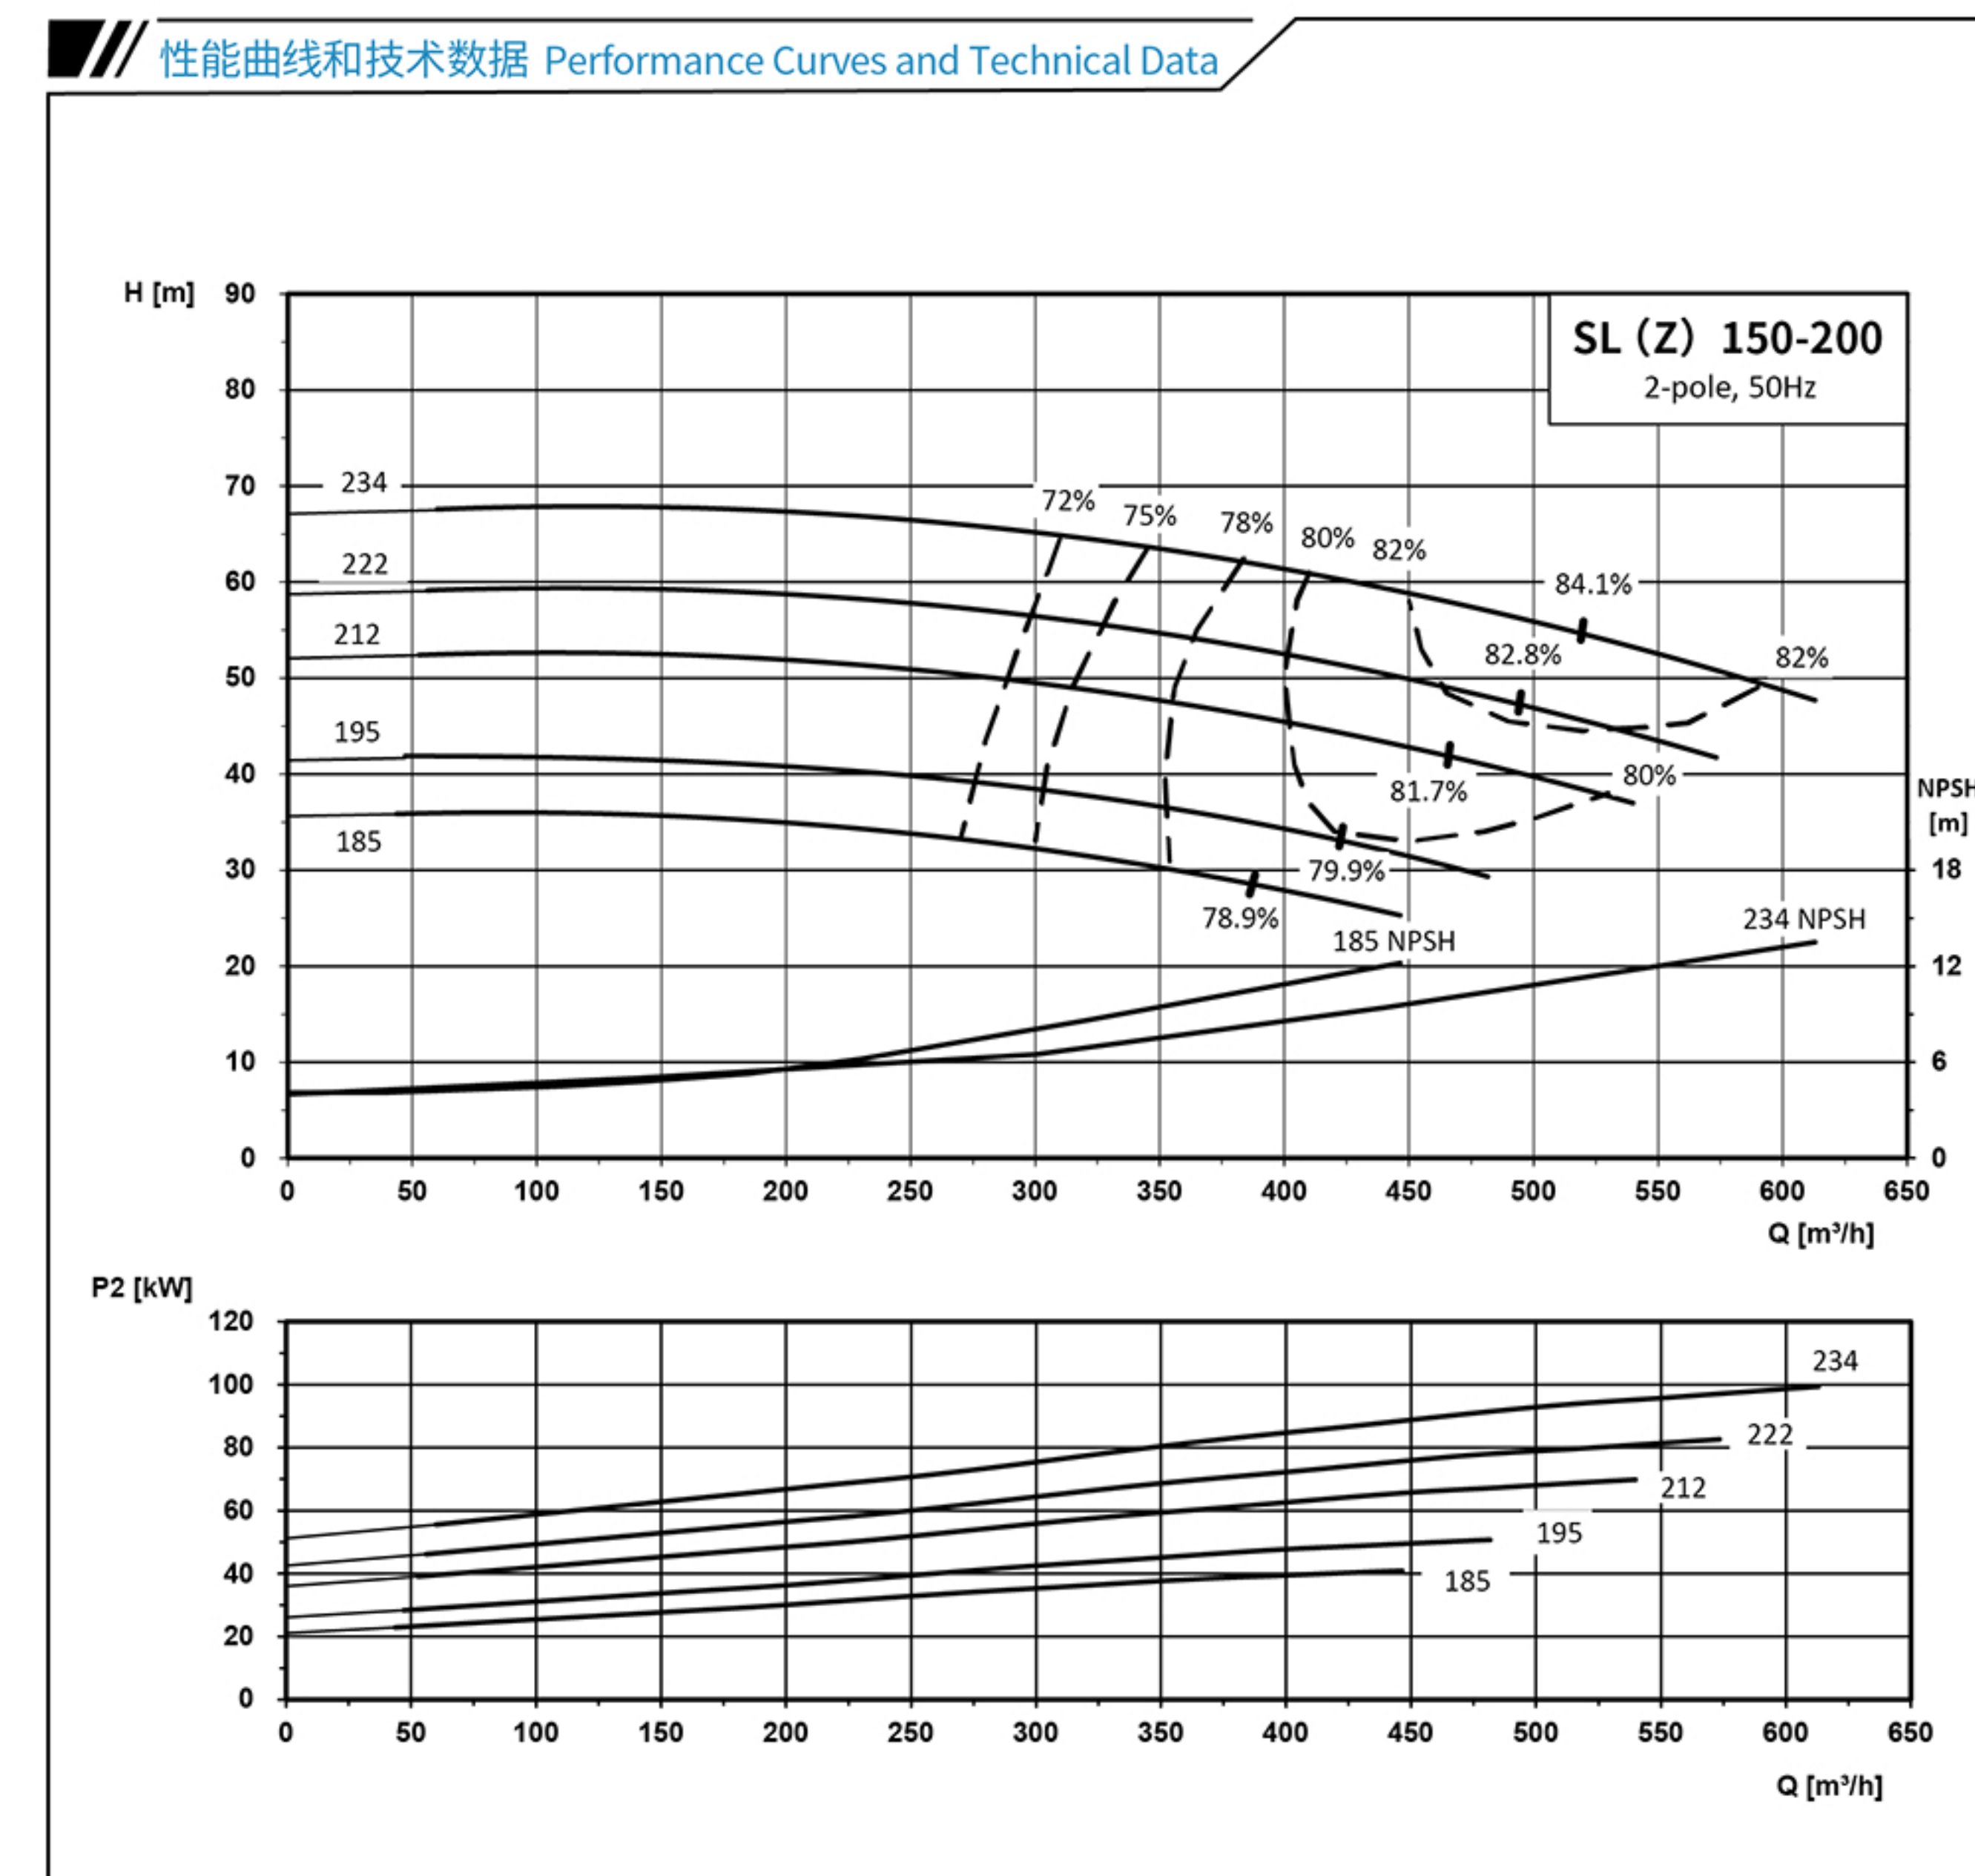

泵型号	Pump Model	SL(Z)150-200-45-2	SL(Z)150-200-55-2	SL(Z)150-200-75-2	SL(Z)150-200-90-2	SL(Z)150-200-110-2
电机型号	Motor Model	YE3-225M-2	YE3-250M-2	YE3-280S-2	YE3-280M-2	YE3-315S-2
电机功率(kW)	Motor Power(kW)	45	55	75	90	110
叶轮直径(mm)	Impeller Diameter(mm)	185	195	212	222	234

SL(Z) 200-200


性能曲线和技术数据 Performance Curves and Technical Data

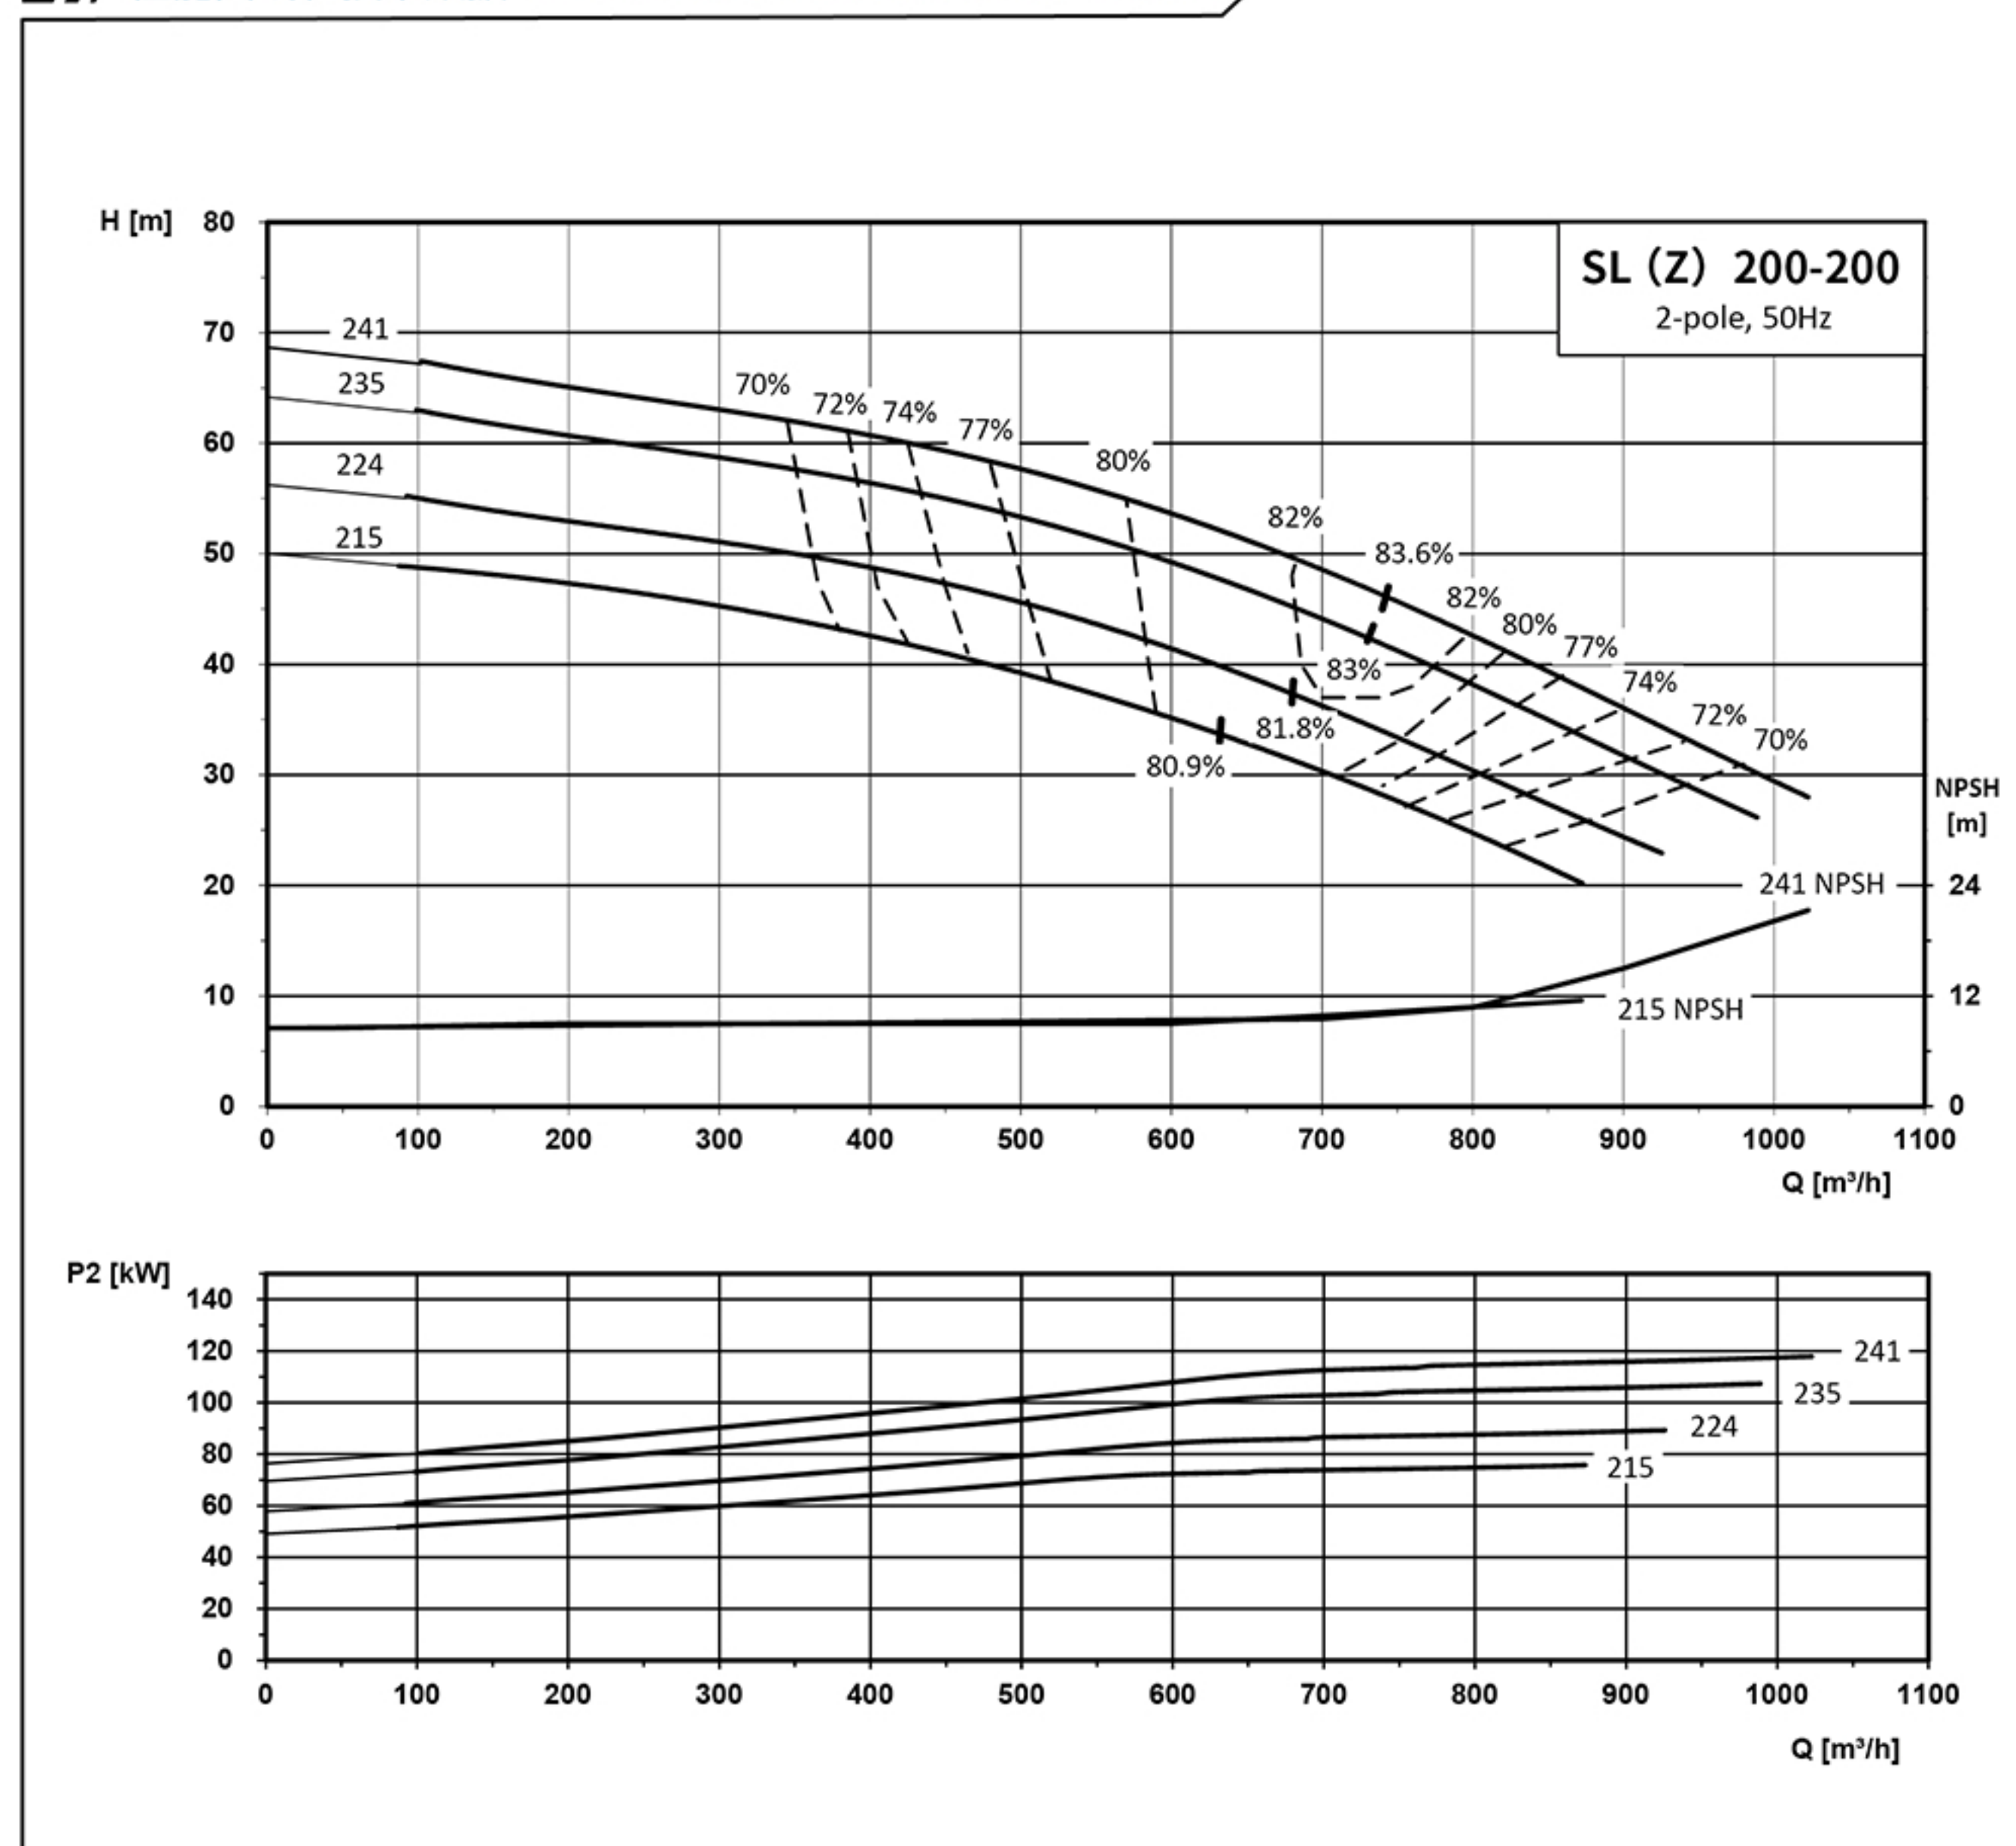

泵型号	Pump Model	SL(Z)200-200-75-2	SL(Z)200-200-90-2	SL(Z)200-200-110-2	SL(Z)200-200-132-2
电机型号	Motor Model	YE3-280S-2	YE3-280M-2	YE3-315S-2	YE3-315M-2
电机功率(kW)	Motor Power(kW)	75	90	110	132
叶轮直径(mm)	Impeller Diameter(mm)	215	224	235	241

SL(Z) 32-250


性能曲线和技术数据 Performance Curves and Technical Data

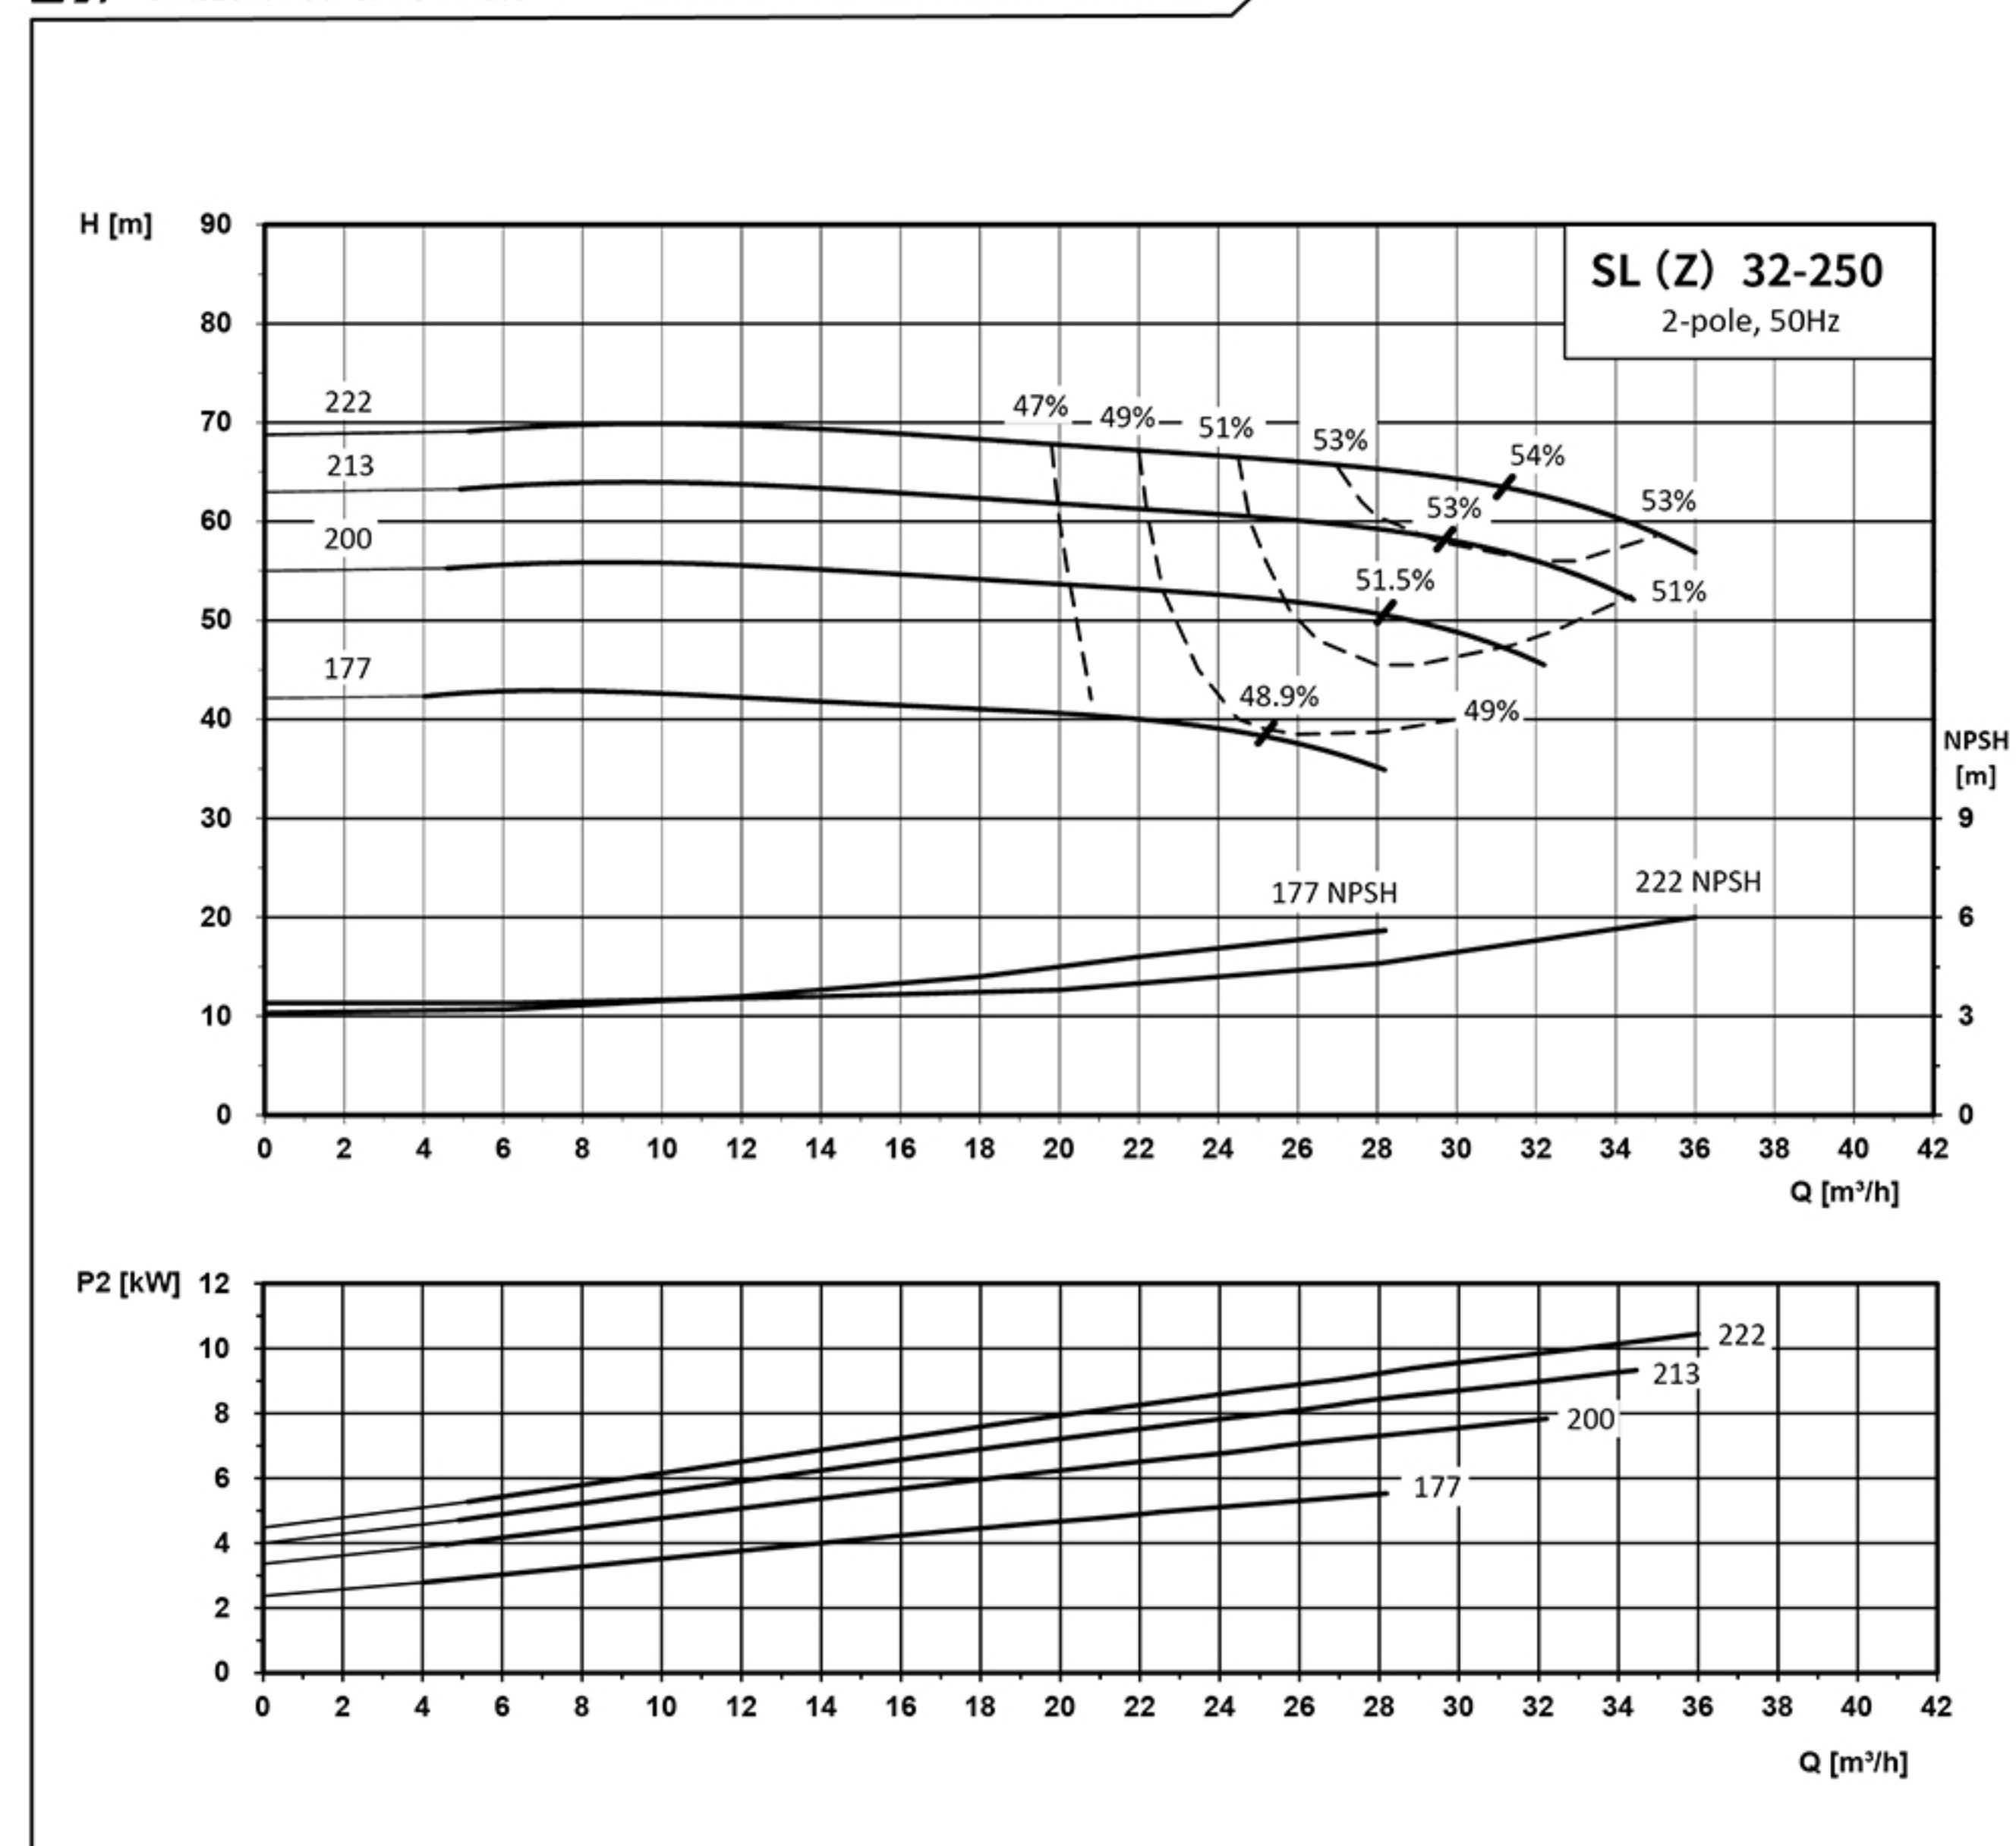

泵型号	Pump Model	SL(Z)32-250-5.5-2	SL(Z)32-250-7.5-2	SL(Z)32-250-9.2-2	SL(Z)32-250-11-2
电机型号	Motor Model	YE3-132S1-2	YE3-132S2-2	YE3-132L-2	YE3-160M1-2
电机功率(kW)	Motor Power(kW)	5.5	7.5	9.2	11
叶轮直径(mm)	Impeller Diameter(mm)	177	200	213	222

SL(Z) 40-250


性能曲线和技术数据 Performance Curves and Technical Data

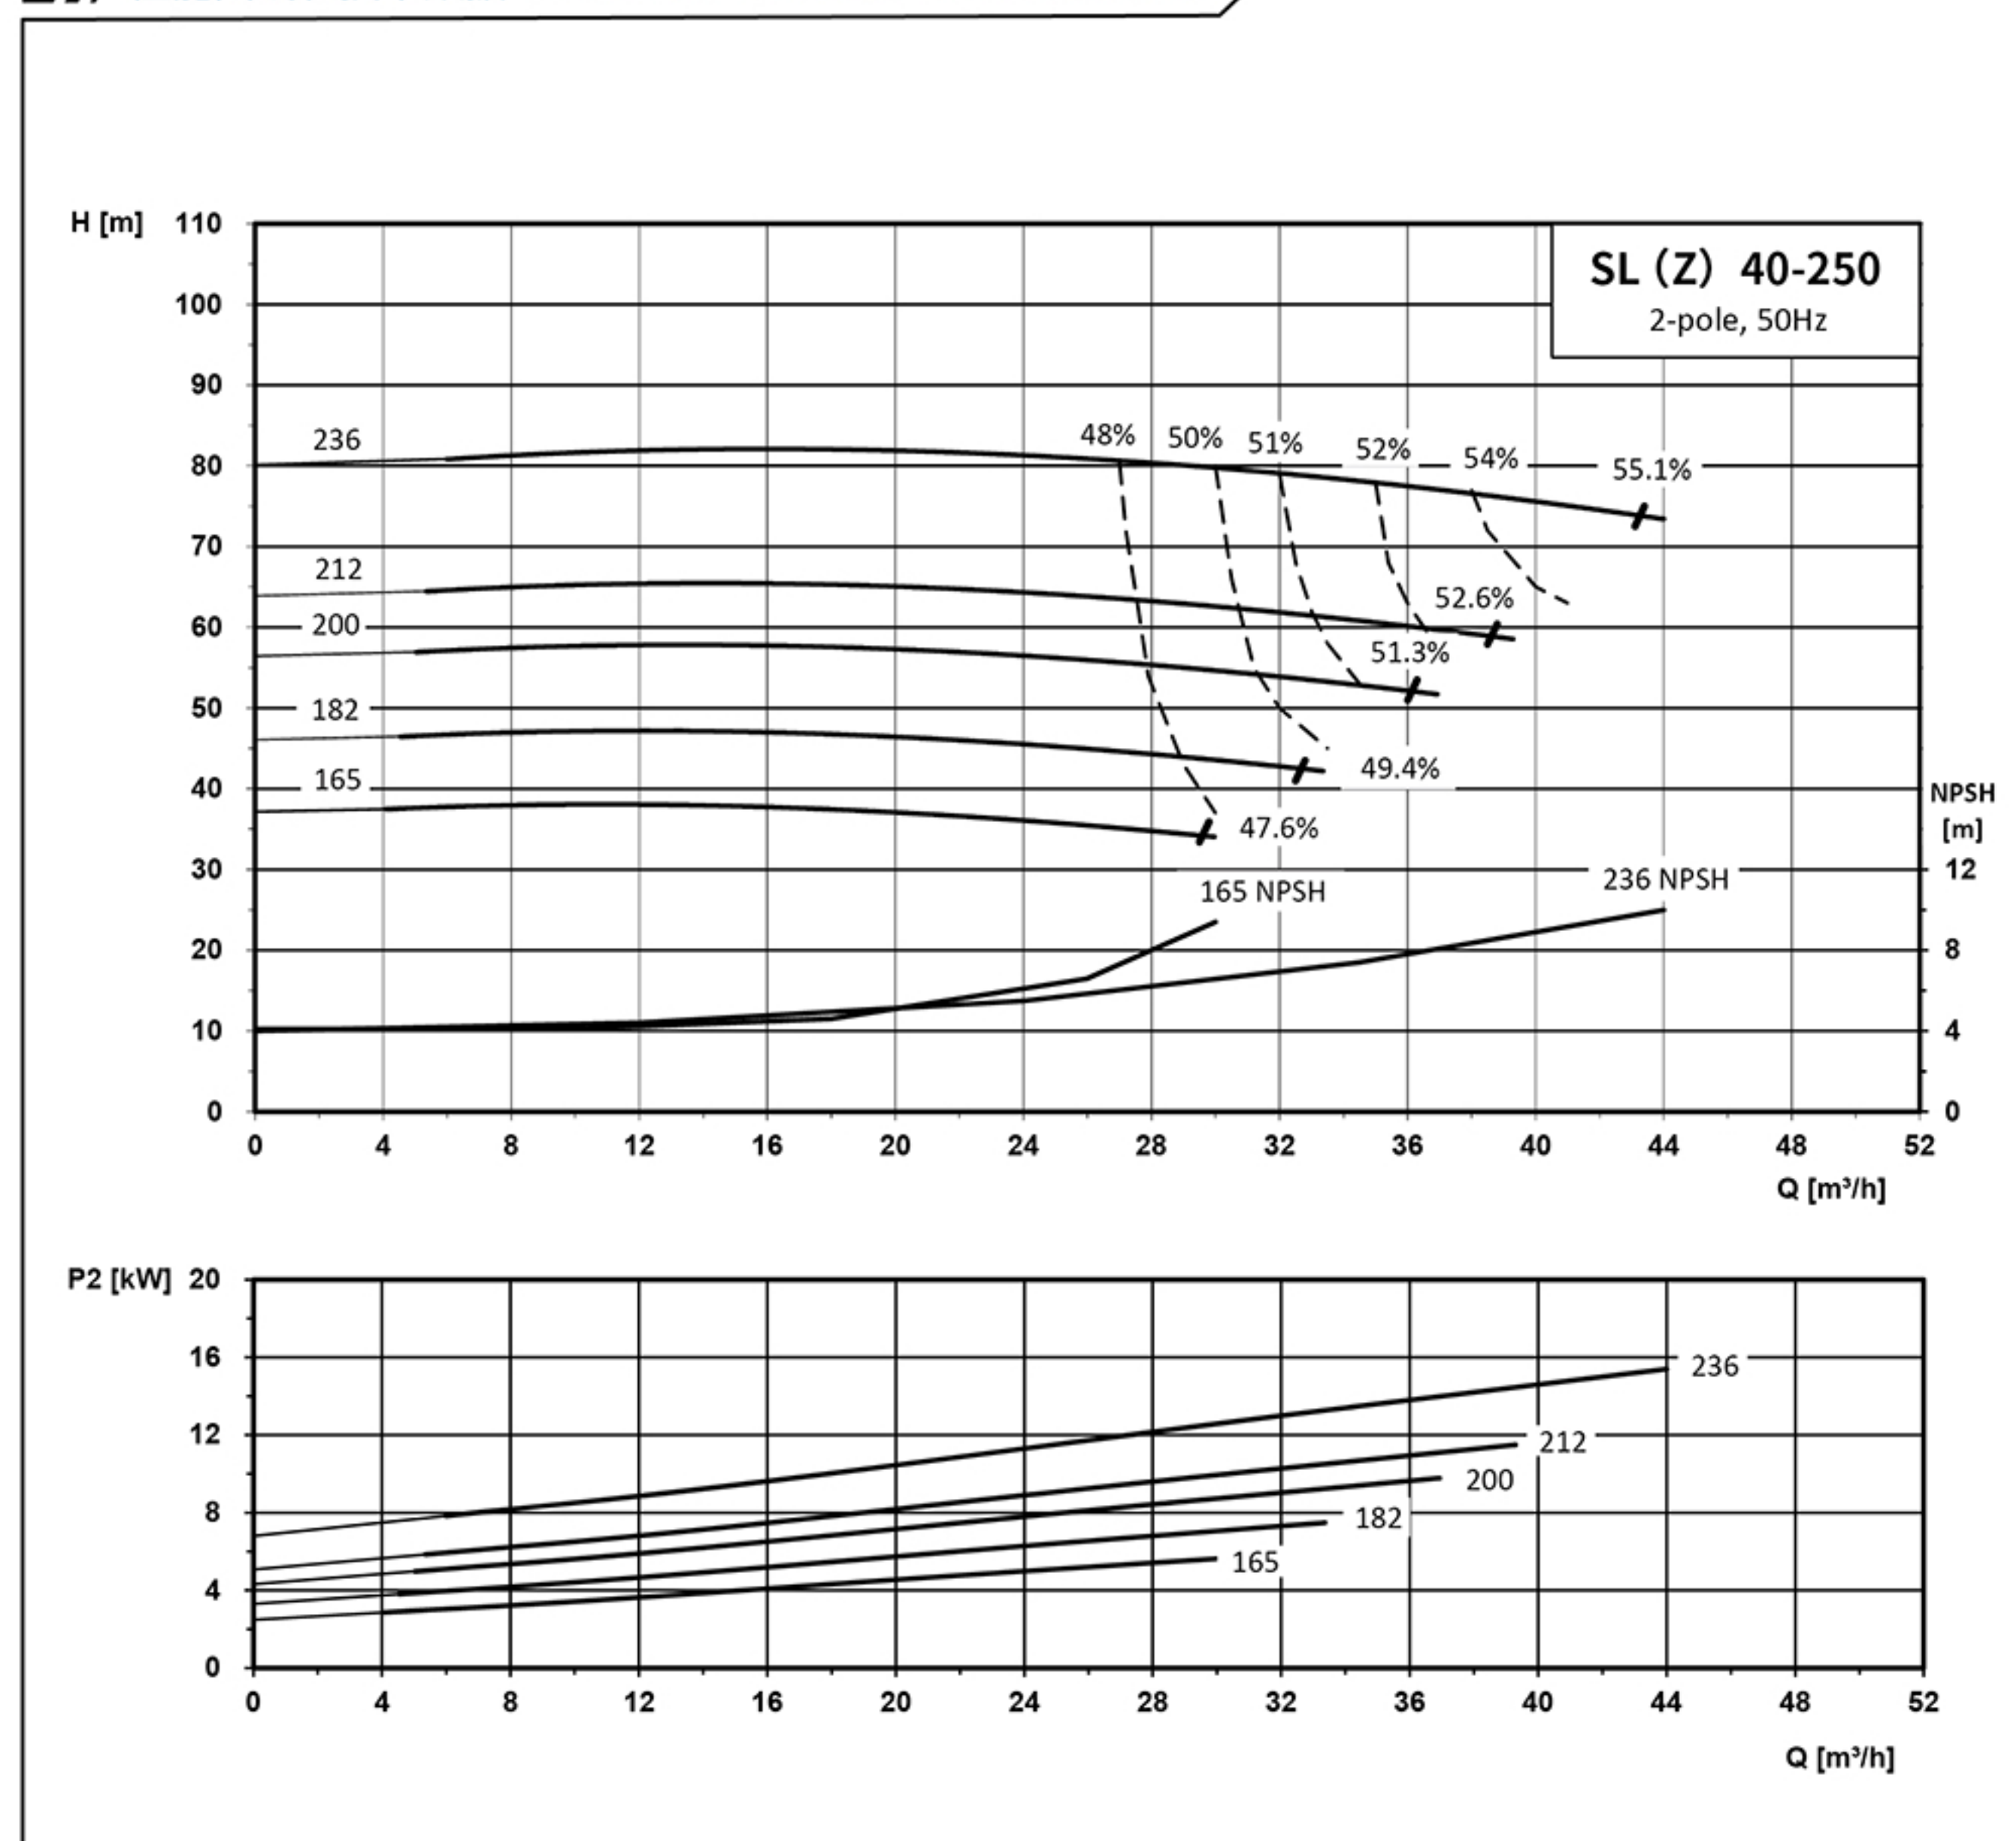

泵型号	Pump Model	SL(Z)40-250-5.5-2	SL(Z)40-250-7.5-2	SL(Z)40-250-9.2-2	SL(Z)40-250-11-2	SL(Z)40-250-15-2
电机型号	Motor Model	YE3-132S1-2	YE3-132S2-2	YE3-132L-2	YE3-160M1-2	YE3-160M2-2
电机功率(kW)	Motor Power(kW)	5.5	7.5	9.2	11	15
叶轮直径(mm)	Impeller Diameter(mm)	165	182	200	212	236

SL(Z) 50-250


性能曲线和技术数据 Performance Curves and Technical Data

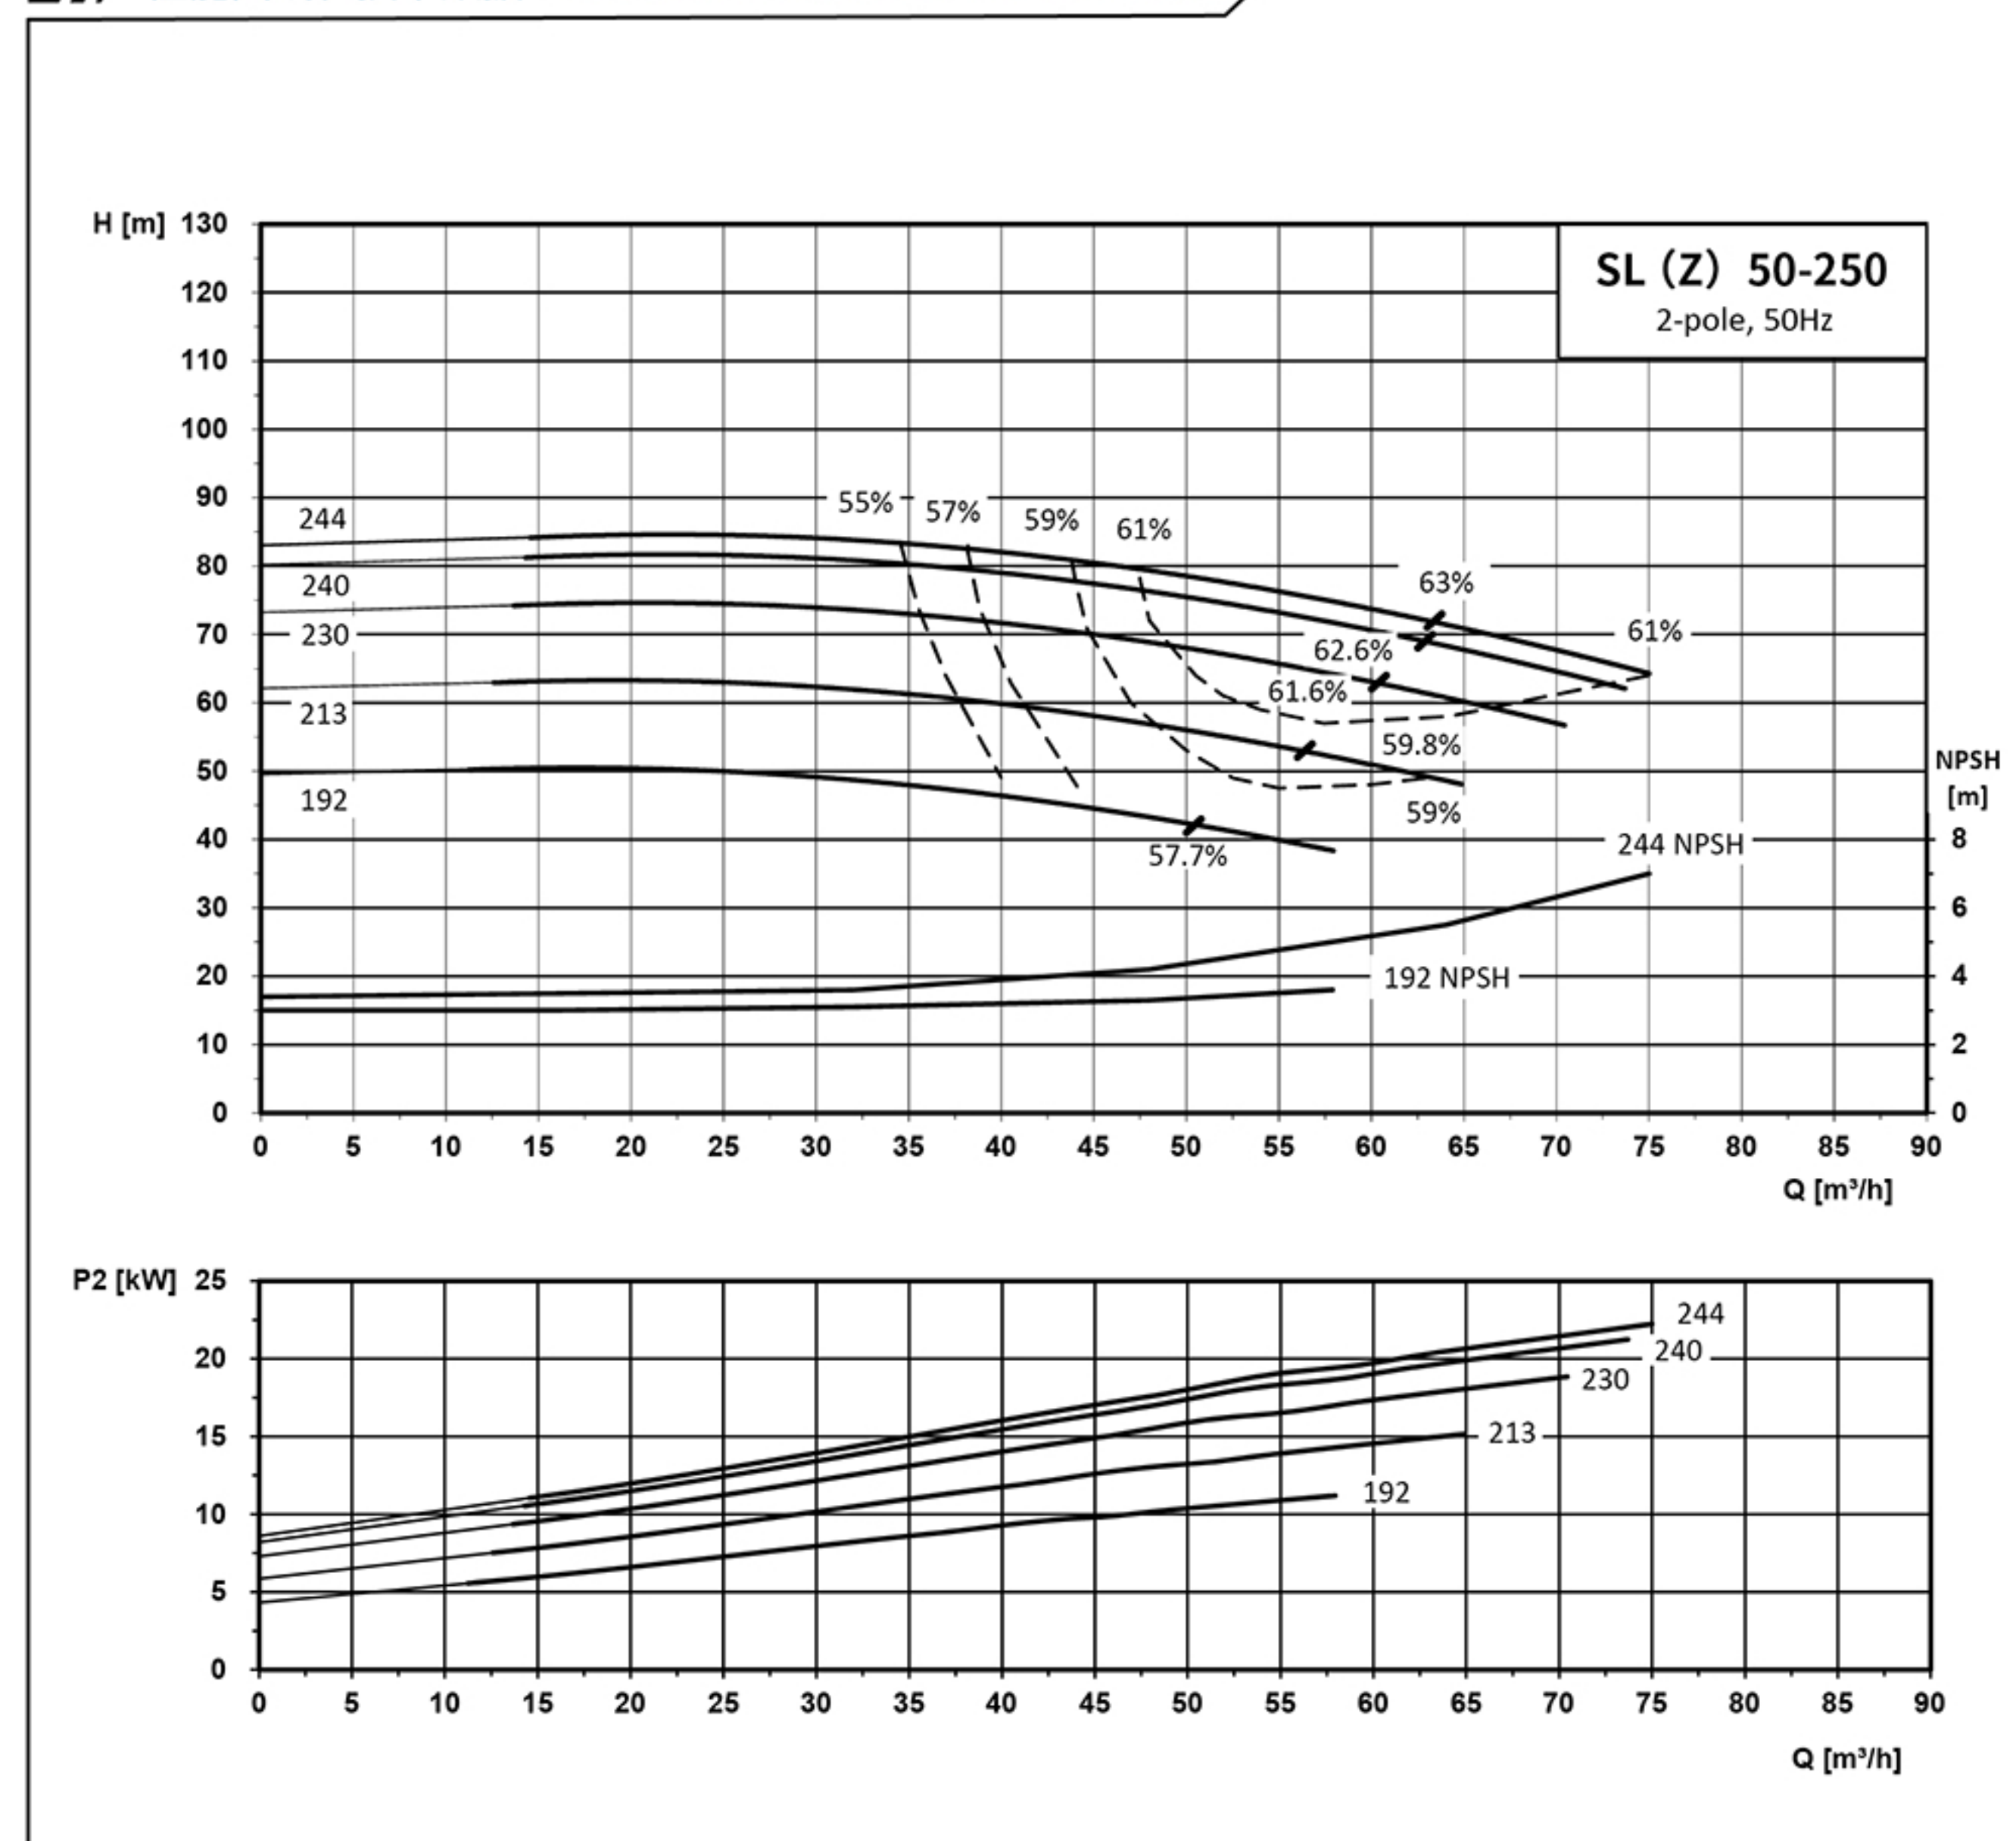

泵型号	Pump Model	SL(Z)50-250-11-2	SL(Z)50-250-15-2	SL(Z)50-250-18.5-2	SL(Z)50-250-22-2	SL(Z)50-250-30-2
电机型号	Motor Model	YE3-160M1-2	YE3-160M2-2	YE3-160L-2	YE3-180M-2	YE3-200L1-2
电机功率(kW)	Motor Power(kW)	11	15	18.5	22	30
叶轮直径(mm)	Impeller Diameter(mm)	192	213	230	240	244

SL(Z) 65-250


性能曲线和技术数据 Performance Curves and Technical Data

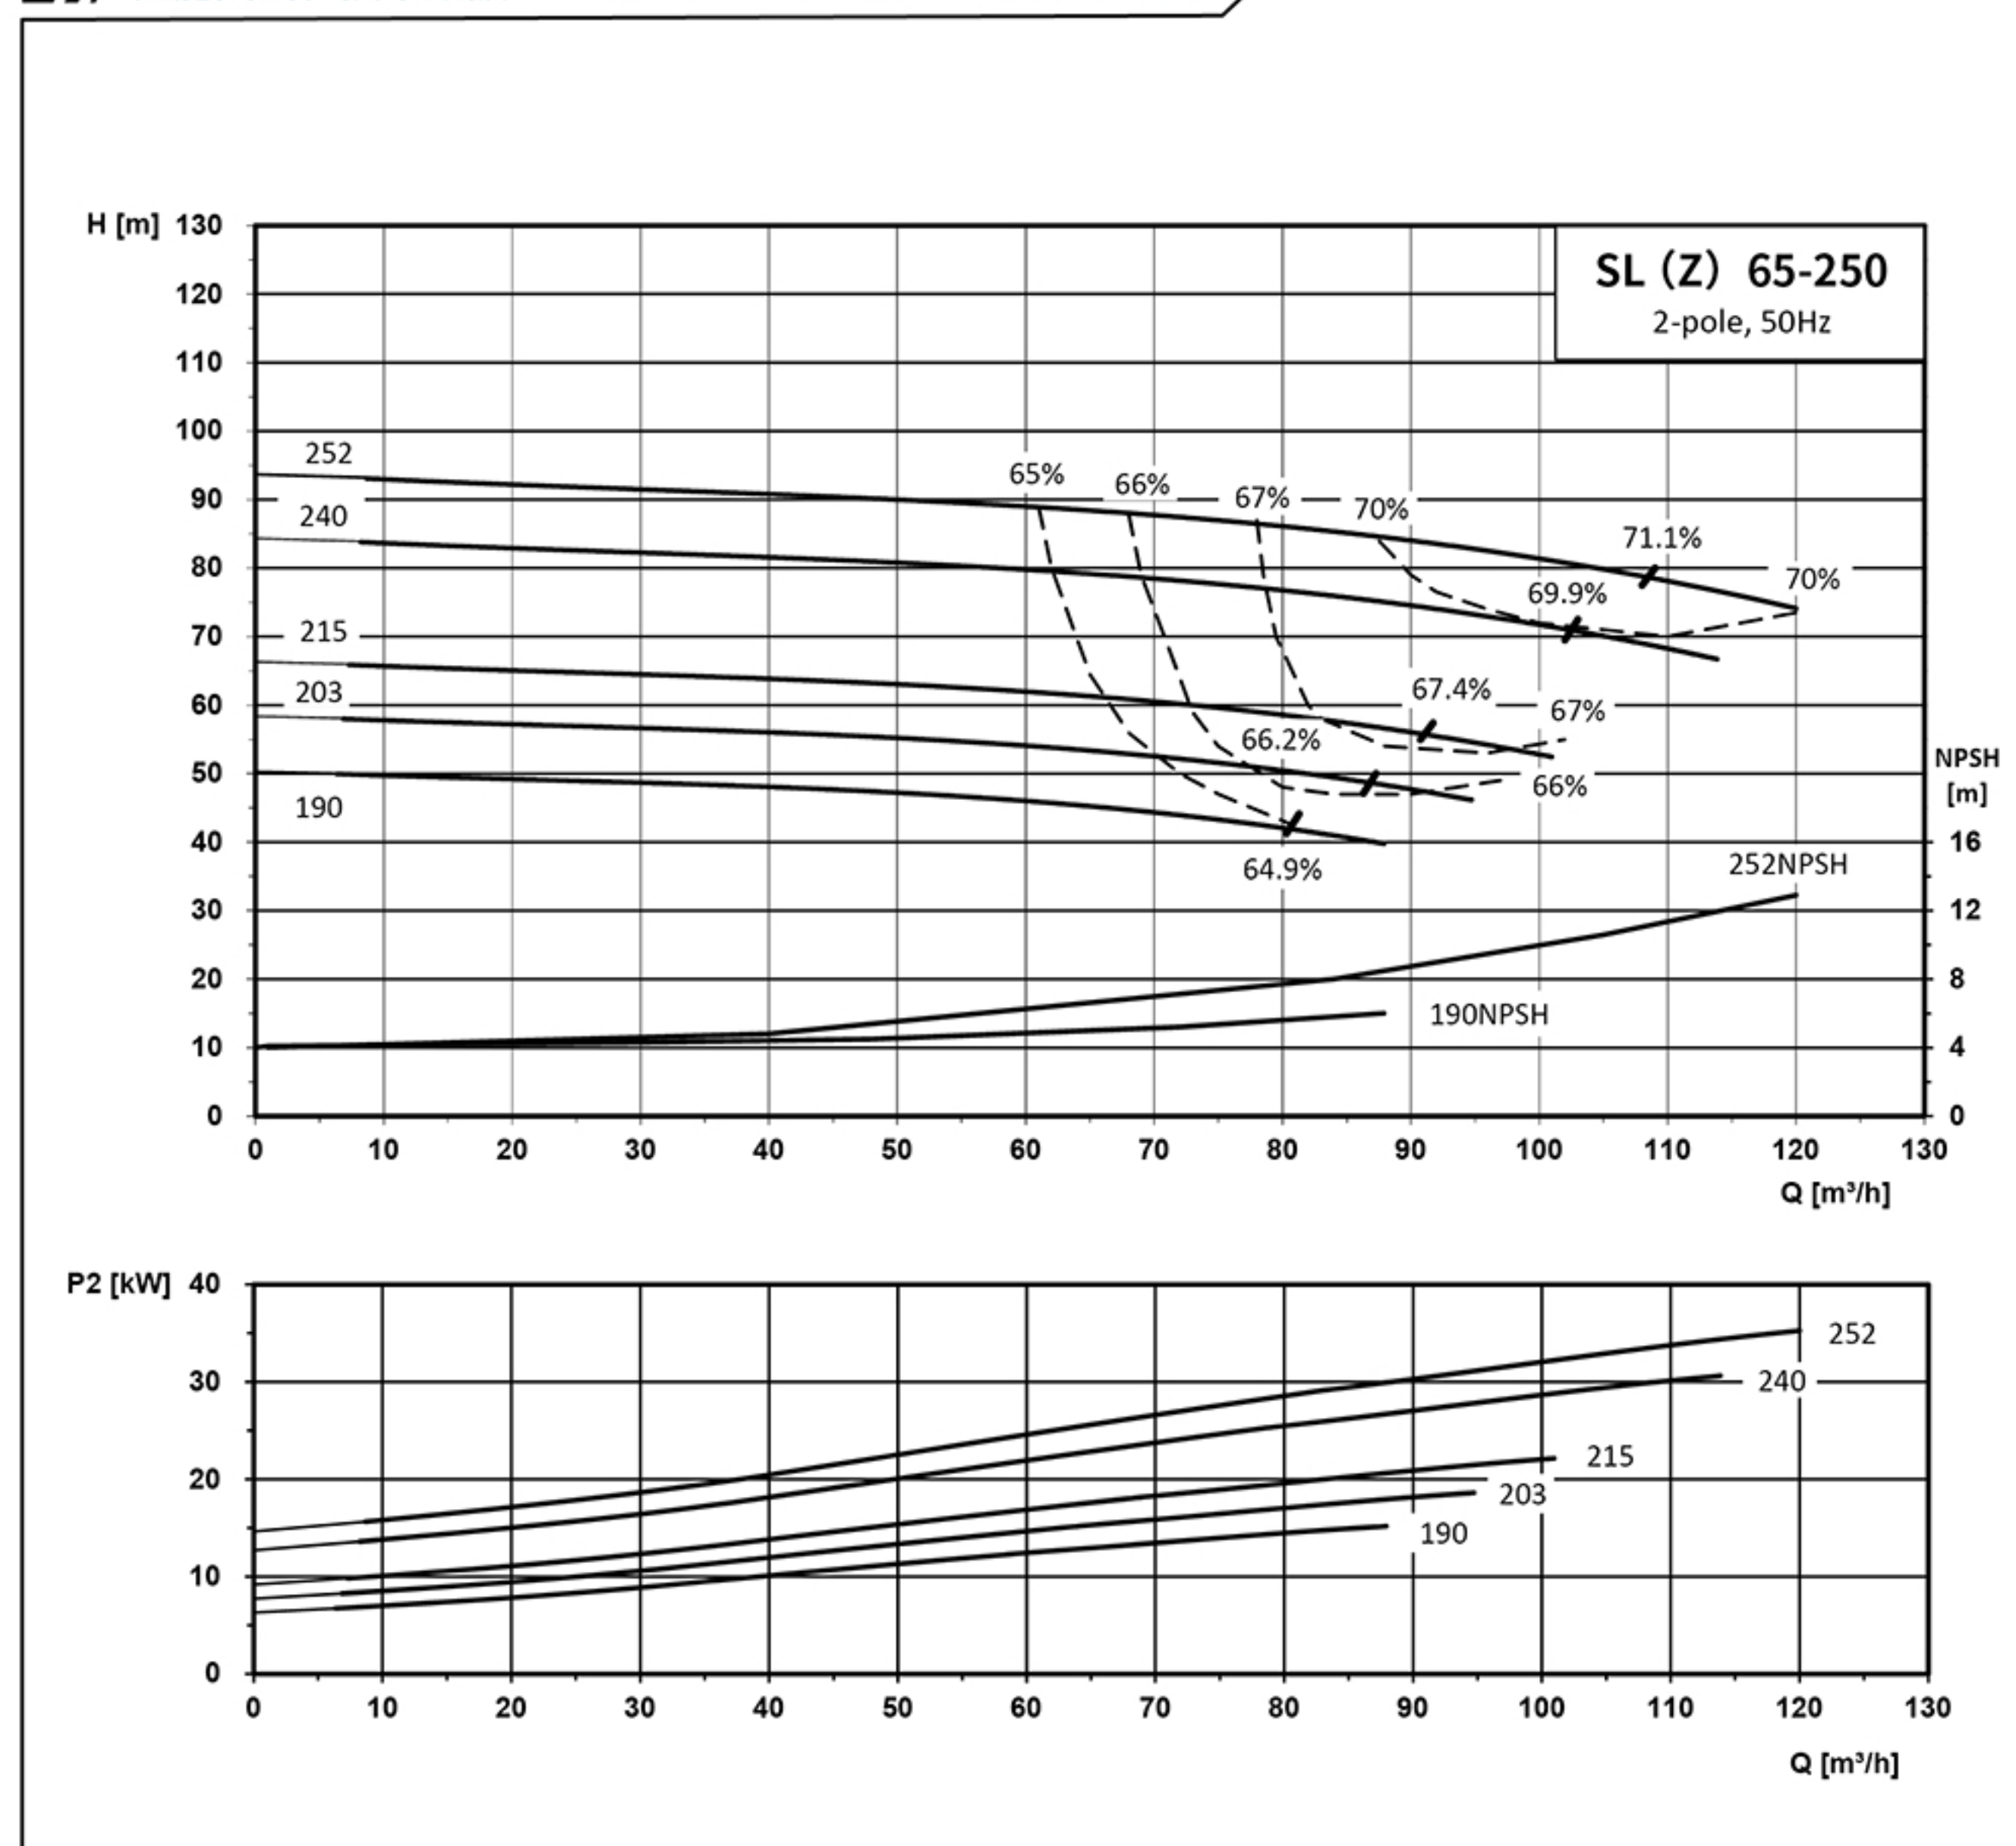

泵型号	Pump Model	SL(Z)65-250-15-2	SL(Z)65-250-18.5-2	SL(Z)65-250-22-2	SL(Z)65-250-30-2	SL(Z)65-250-37-2
电机型号	Motor Model	YE3-160M2-2	YE3-160L-2	YE3-180M-2	YE3-200L1-2	YE3-200L2-2
电机功率(kW)	Motor Power(kW)	15	18.5	22	30	37
叶轮直径(mm)	Impeller Diameter(mm)	190	203	215	240	252

SL(Z) 80-250


性能曲线和技术数据 Performance Curves and Technical Data

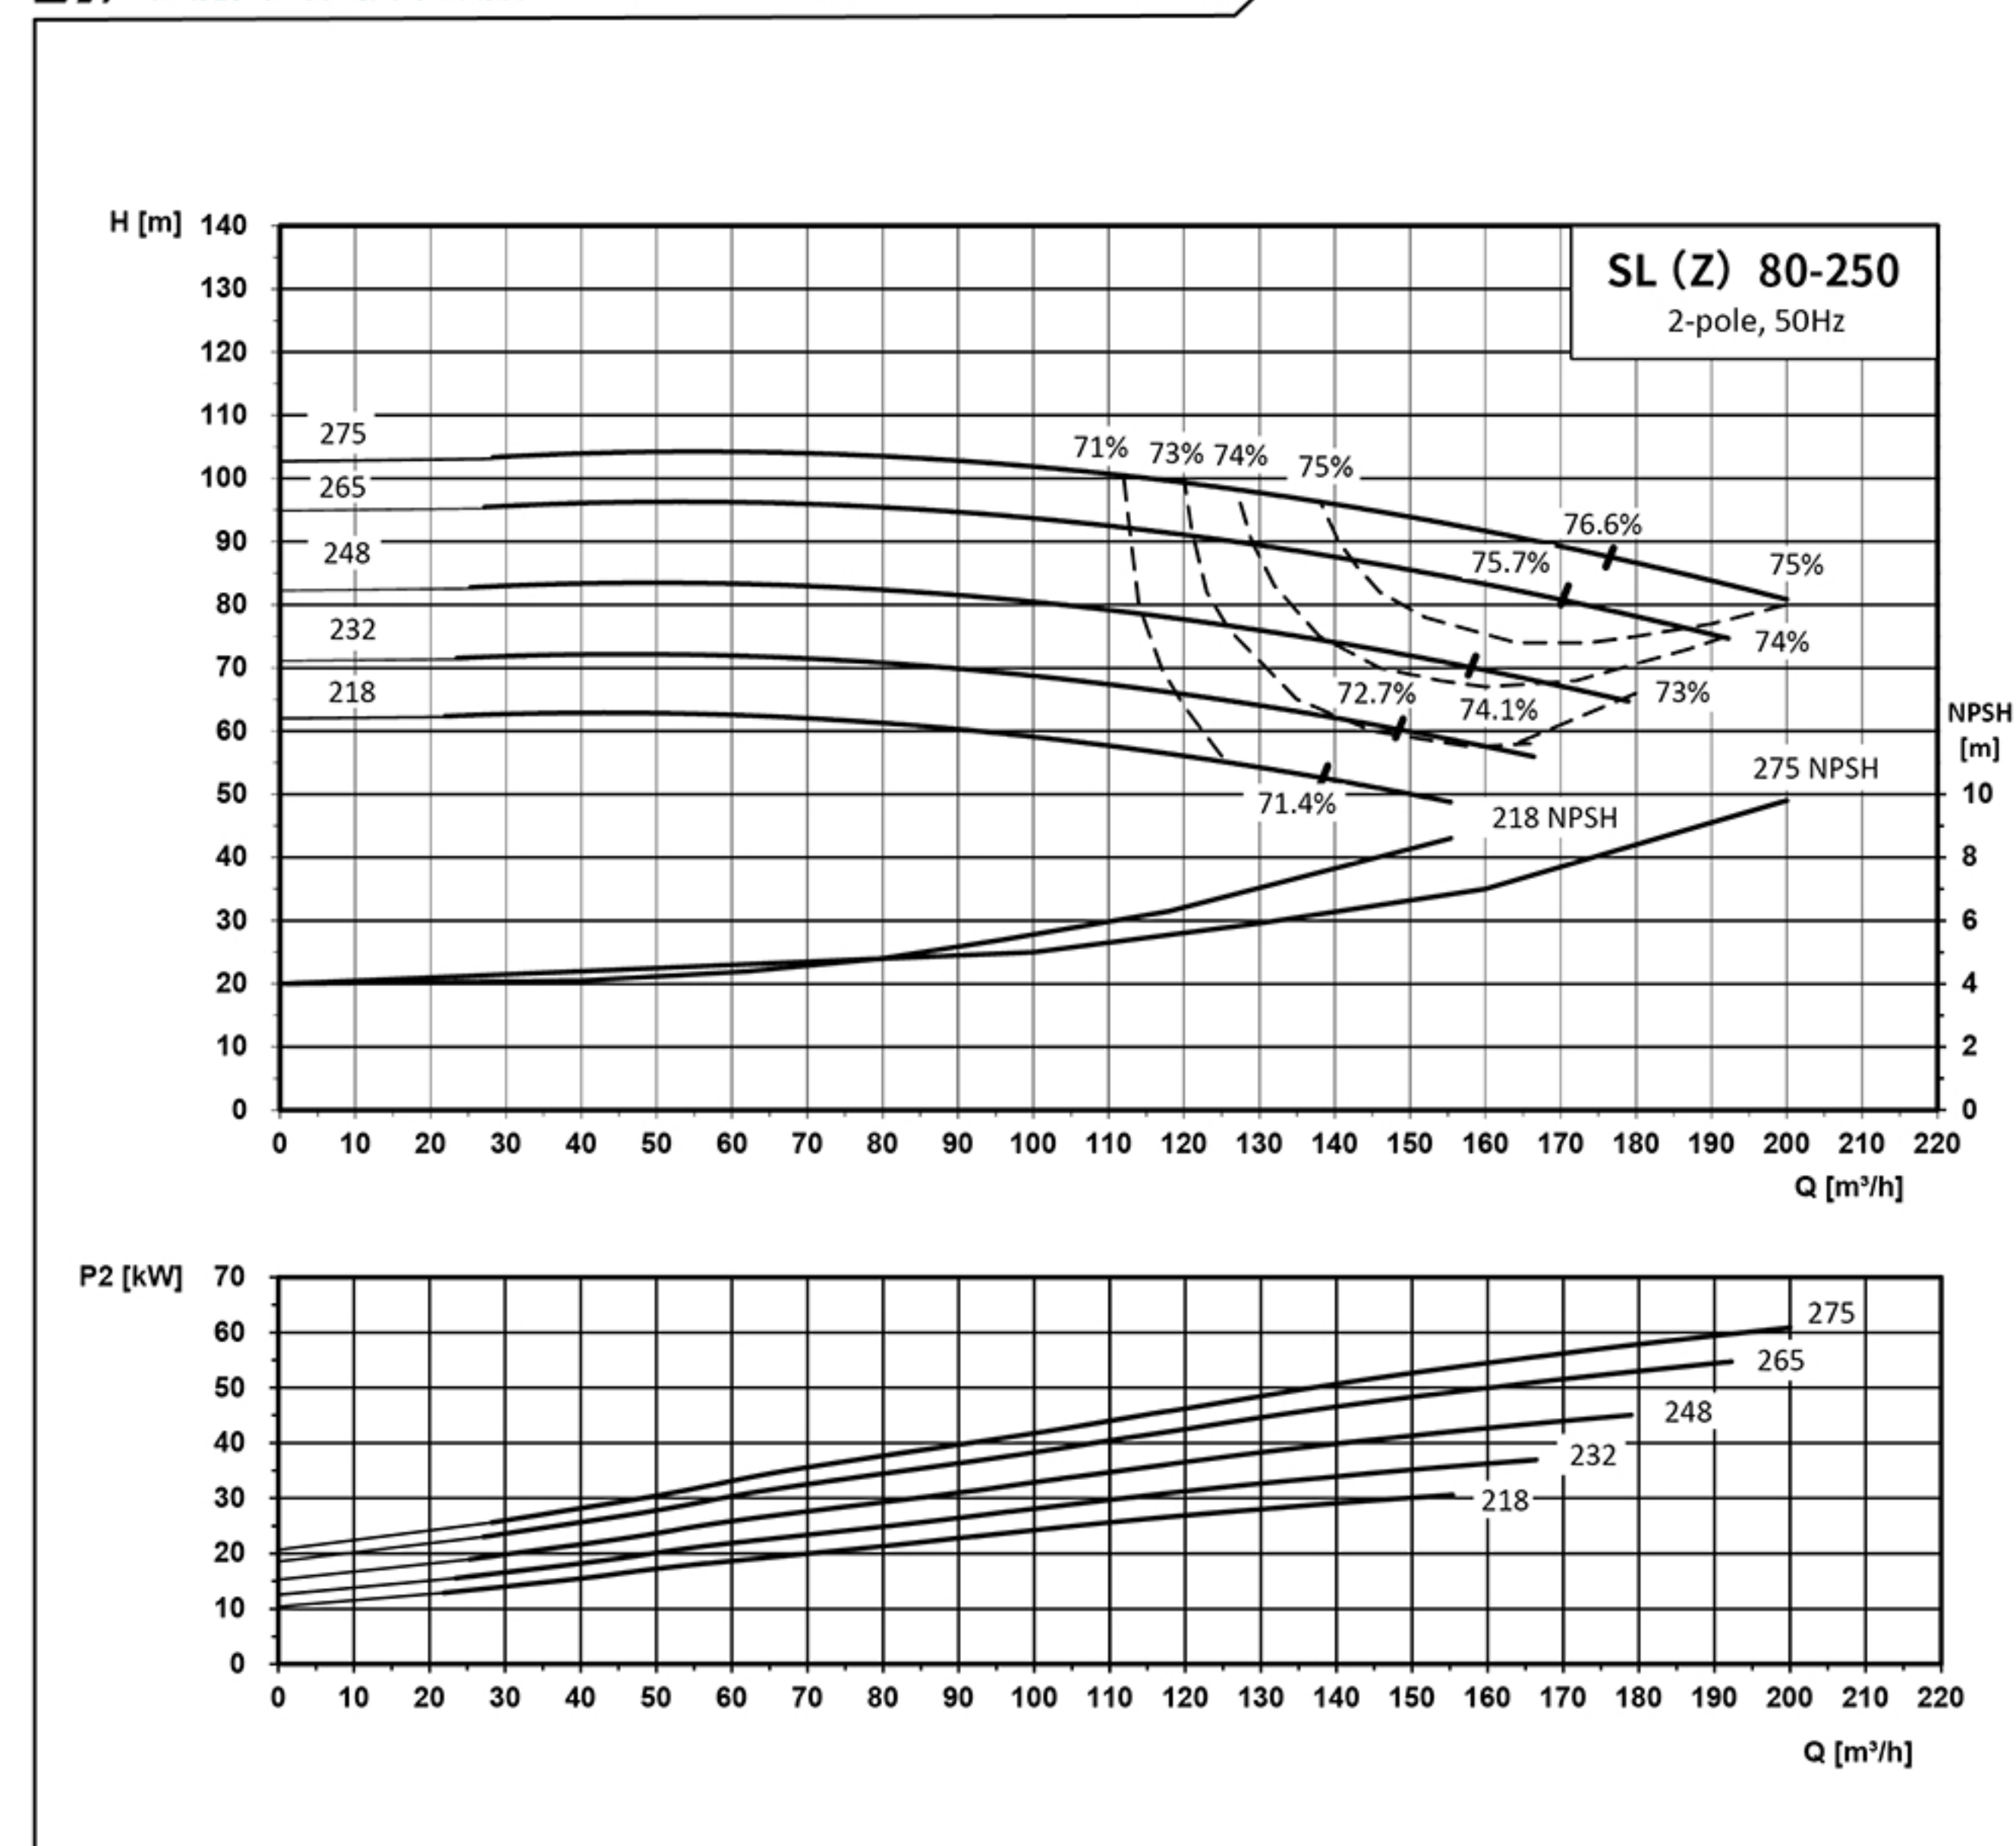

泵型号	Pump Model	SL(Z)80-250-30-2	SL(Z)80-250-37-2	SL(Z)80-250-45-2	SL(Z)80-250-55-2	SL(Z)80-250-75-2
电机型号	Motor Model	YE3-200L1-2	YE3-200L2-2	YE3-225M-2	YE3-250M-2	YE3-280S-2
电机功率(kW)	Motor Power(kW)	30	37	45	55	75
叶轮直径(mm)	Impeller Diameter(mm)	218	232	248	265	275

SL(Z) 100-250


性能曲线和技术数据 Performance Curves and Technical Data

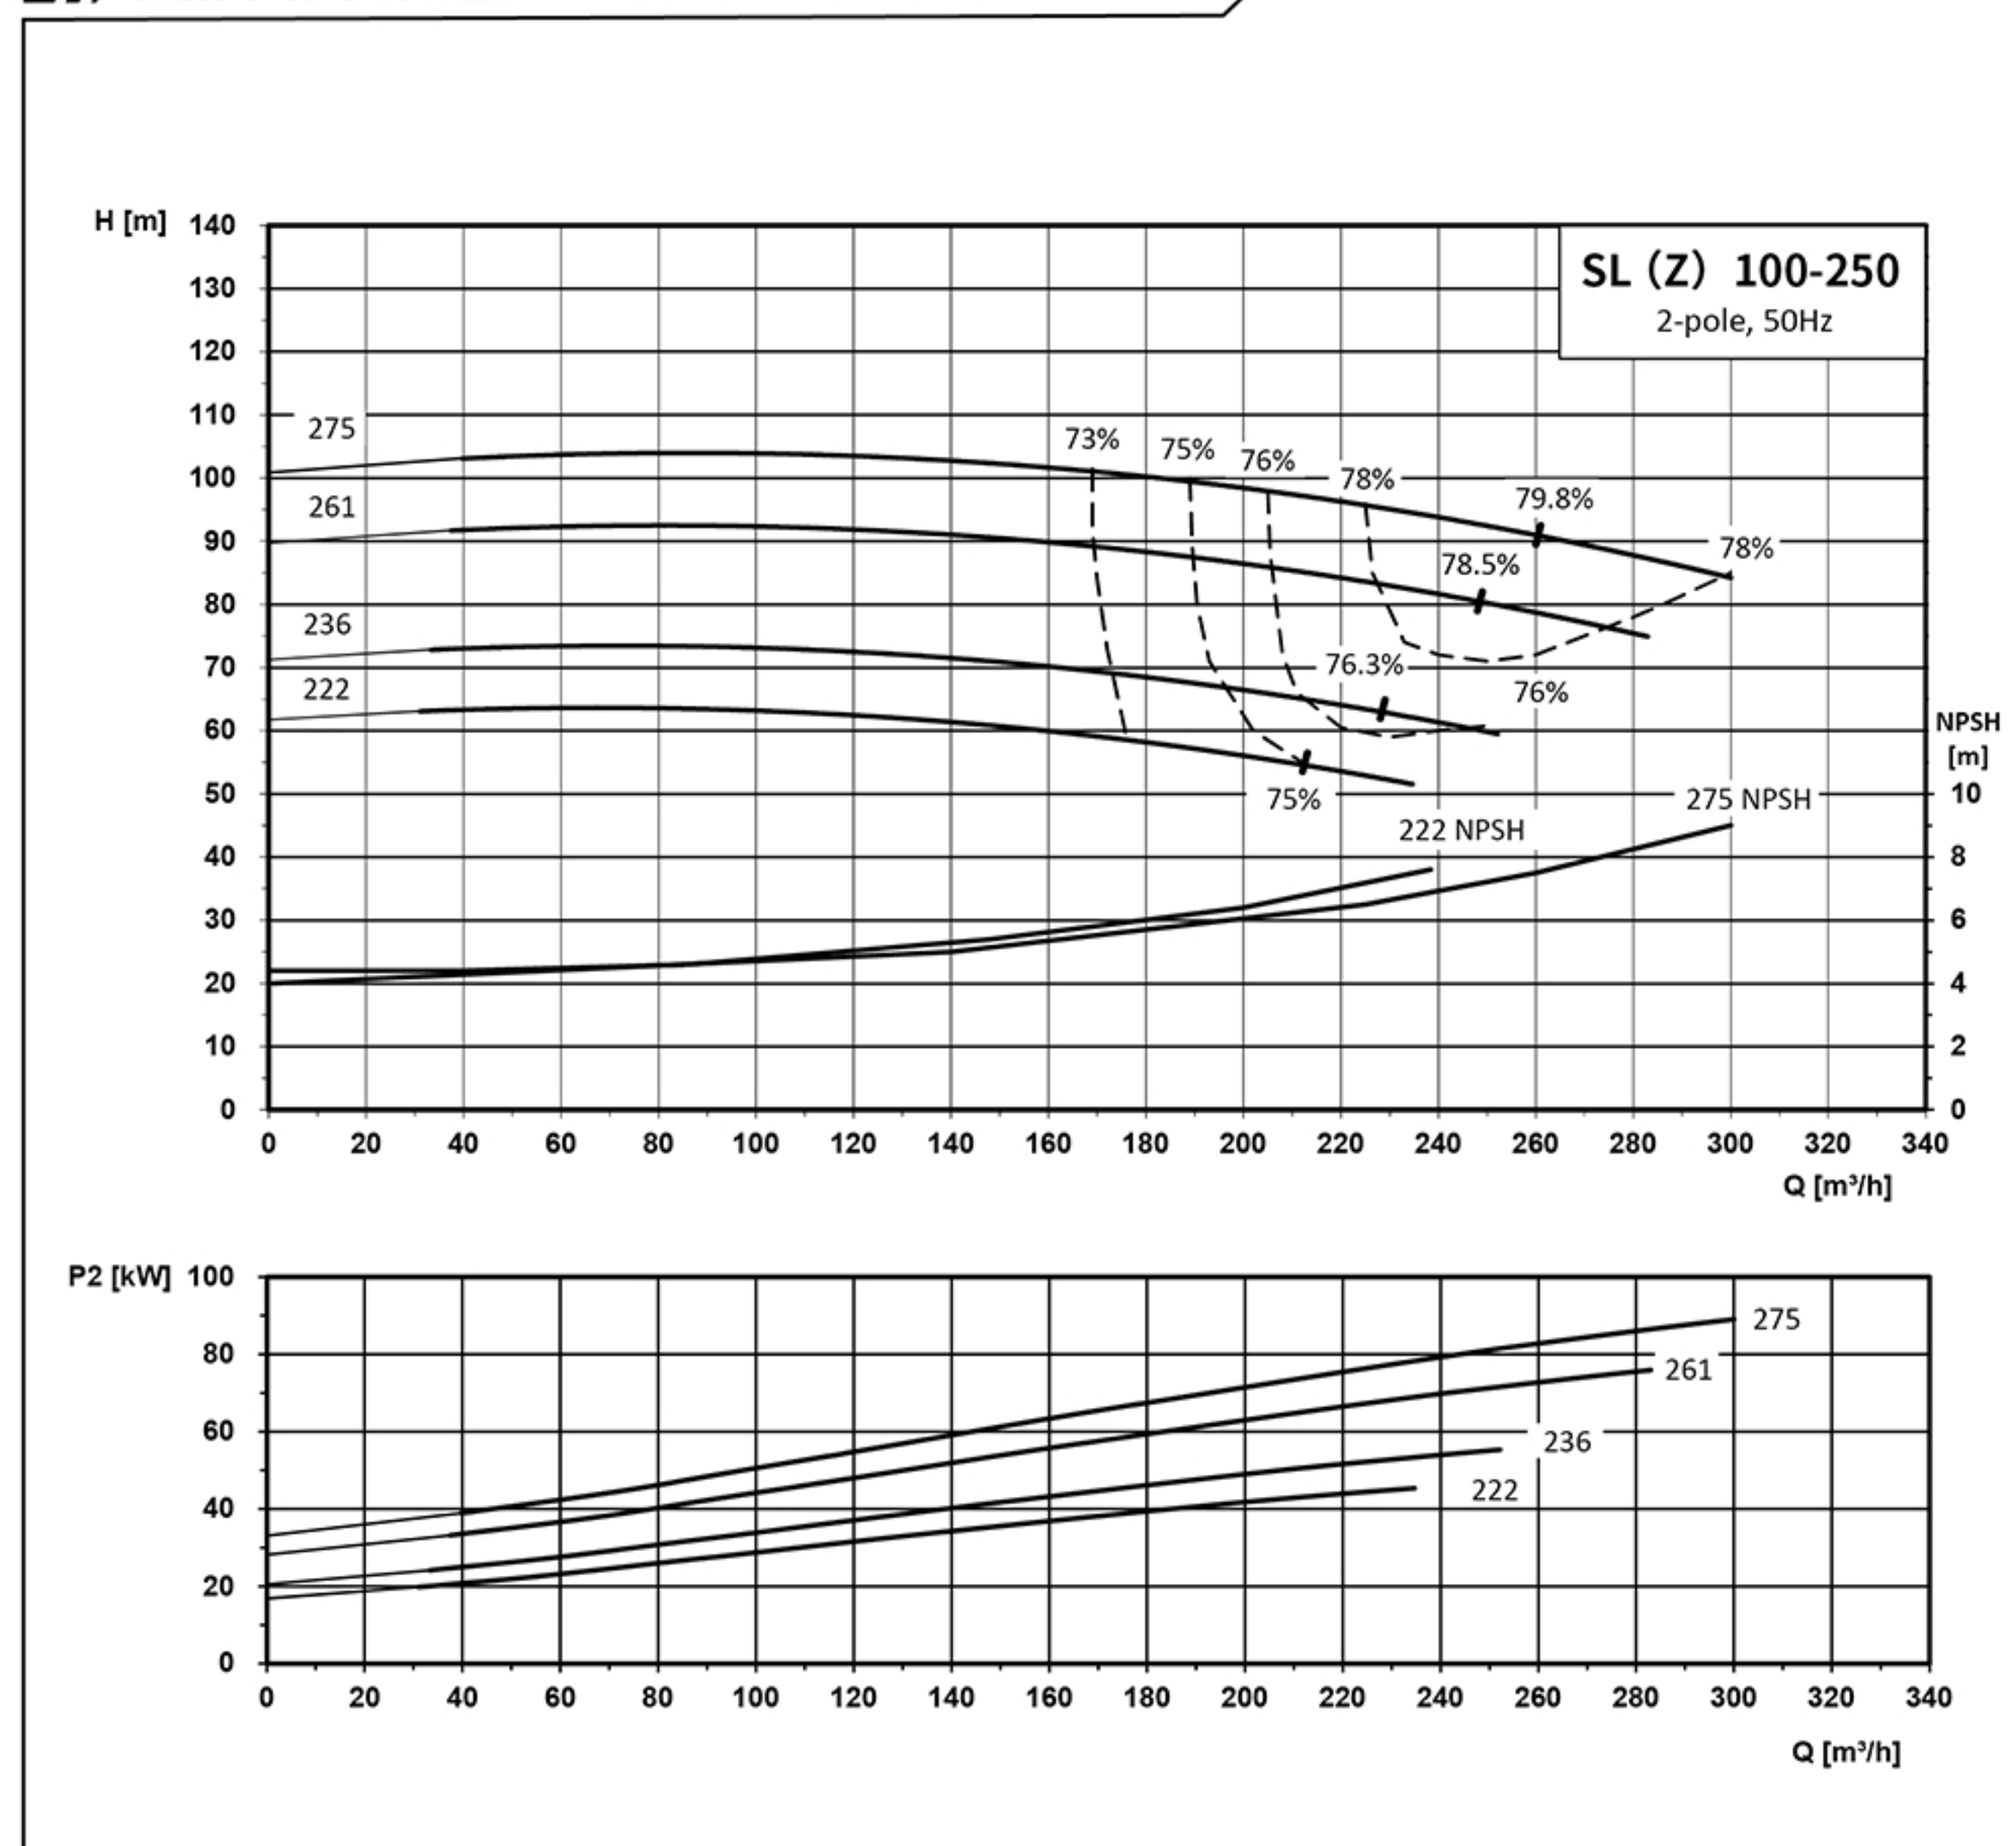

泵型号	Pump Model	SL(Z)100-250-45-2	SL(Z)100-250-55-2	SL(Z)100-250-75-2	SL(Z)100-250-90-2
电机型号	Motor Model	YE3-225M-2	YE3-250M-2	YE3-280S-2	YE3-280M-2
电机功率(kW)	Motor Power(kW)	45	55	75	90
叶轮直径(mm)	Impeller Diameter(mm)	222	236	261	275


SL(Z) 125-250

性能曲线和技术数据 Performance Curves and Technical Data

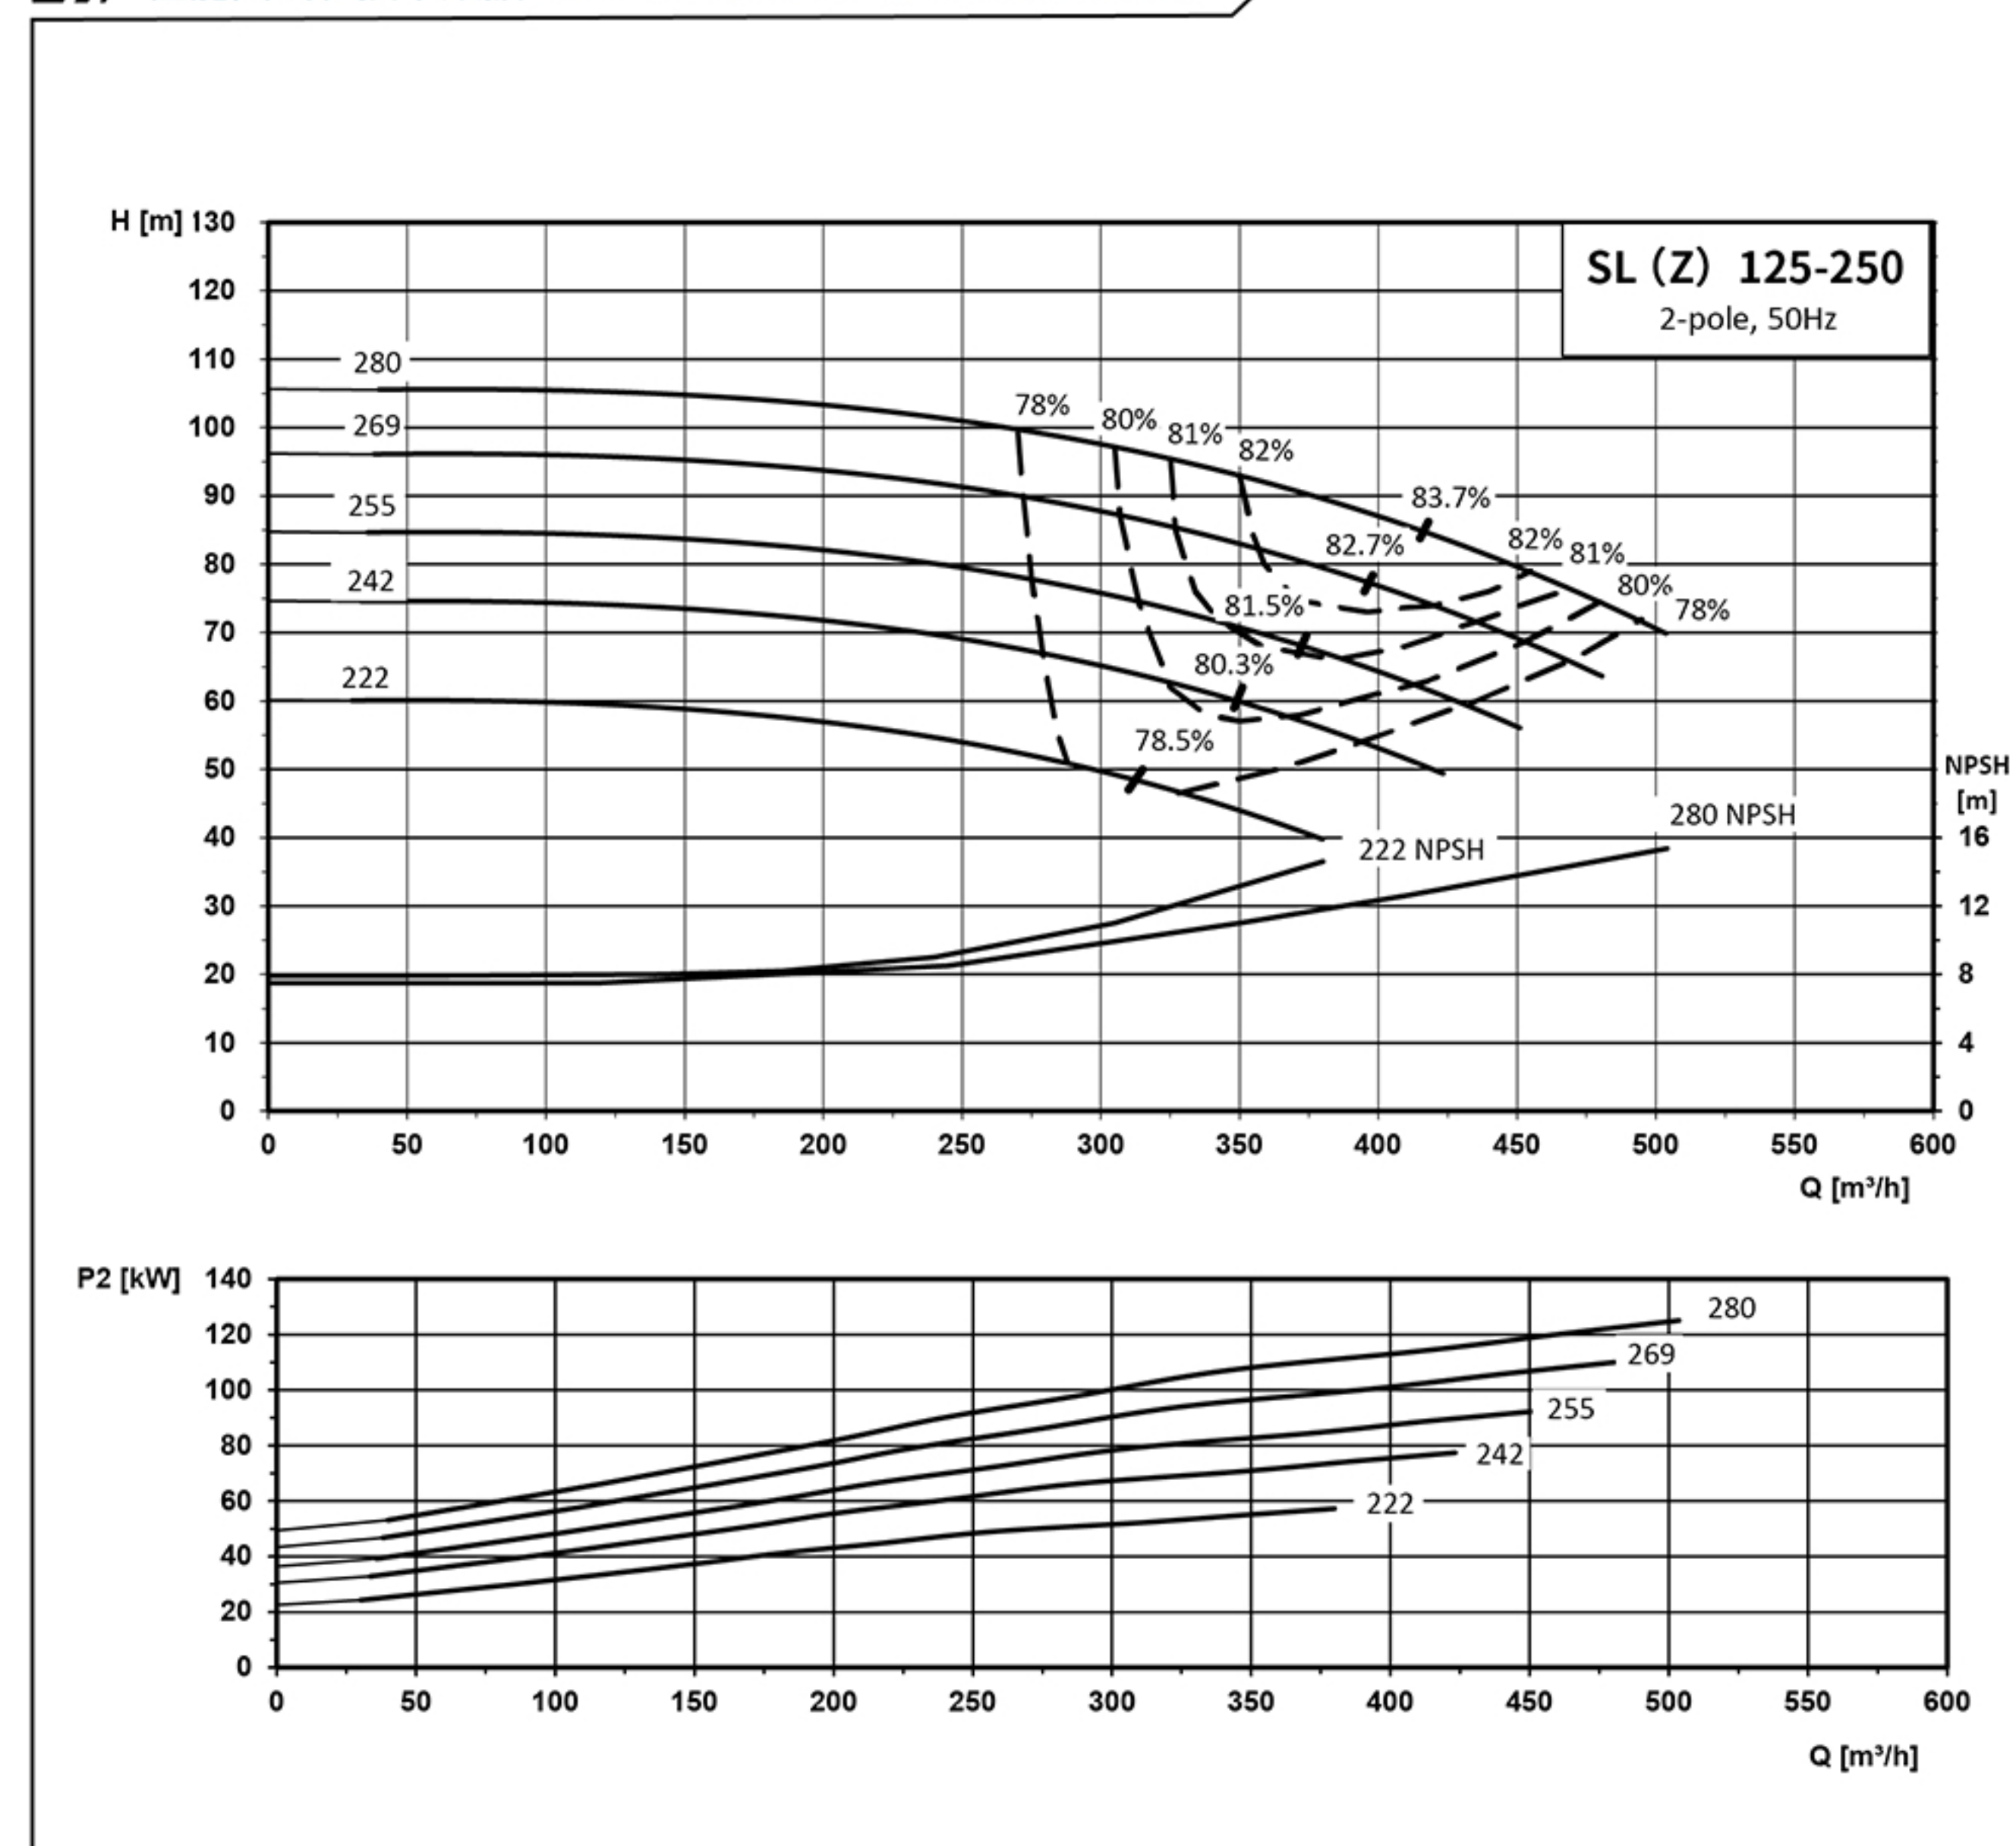


泵型号	Pump Model	SL(Z)125-250-55-2	SL(Z)125-250-75-2	SL(Z)125-250-90-2	SL(Z)125-250-110-2	SL(Z)125-250-132-2
电机型号	Motor Model	YE3-250M-2	YE3-280S-2	YE3-280M-2	YE3-315S-2	YE3-315M-2
电机功率(kW)	Motor Power(kW)	55	75	90	110	132
叶轮直径(mm)	Impeller Diameter(mm)	222	242	255	269	280

SL(Z) 150-250

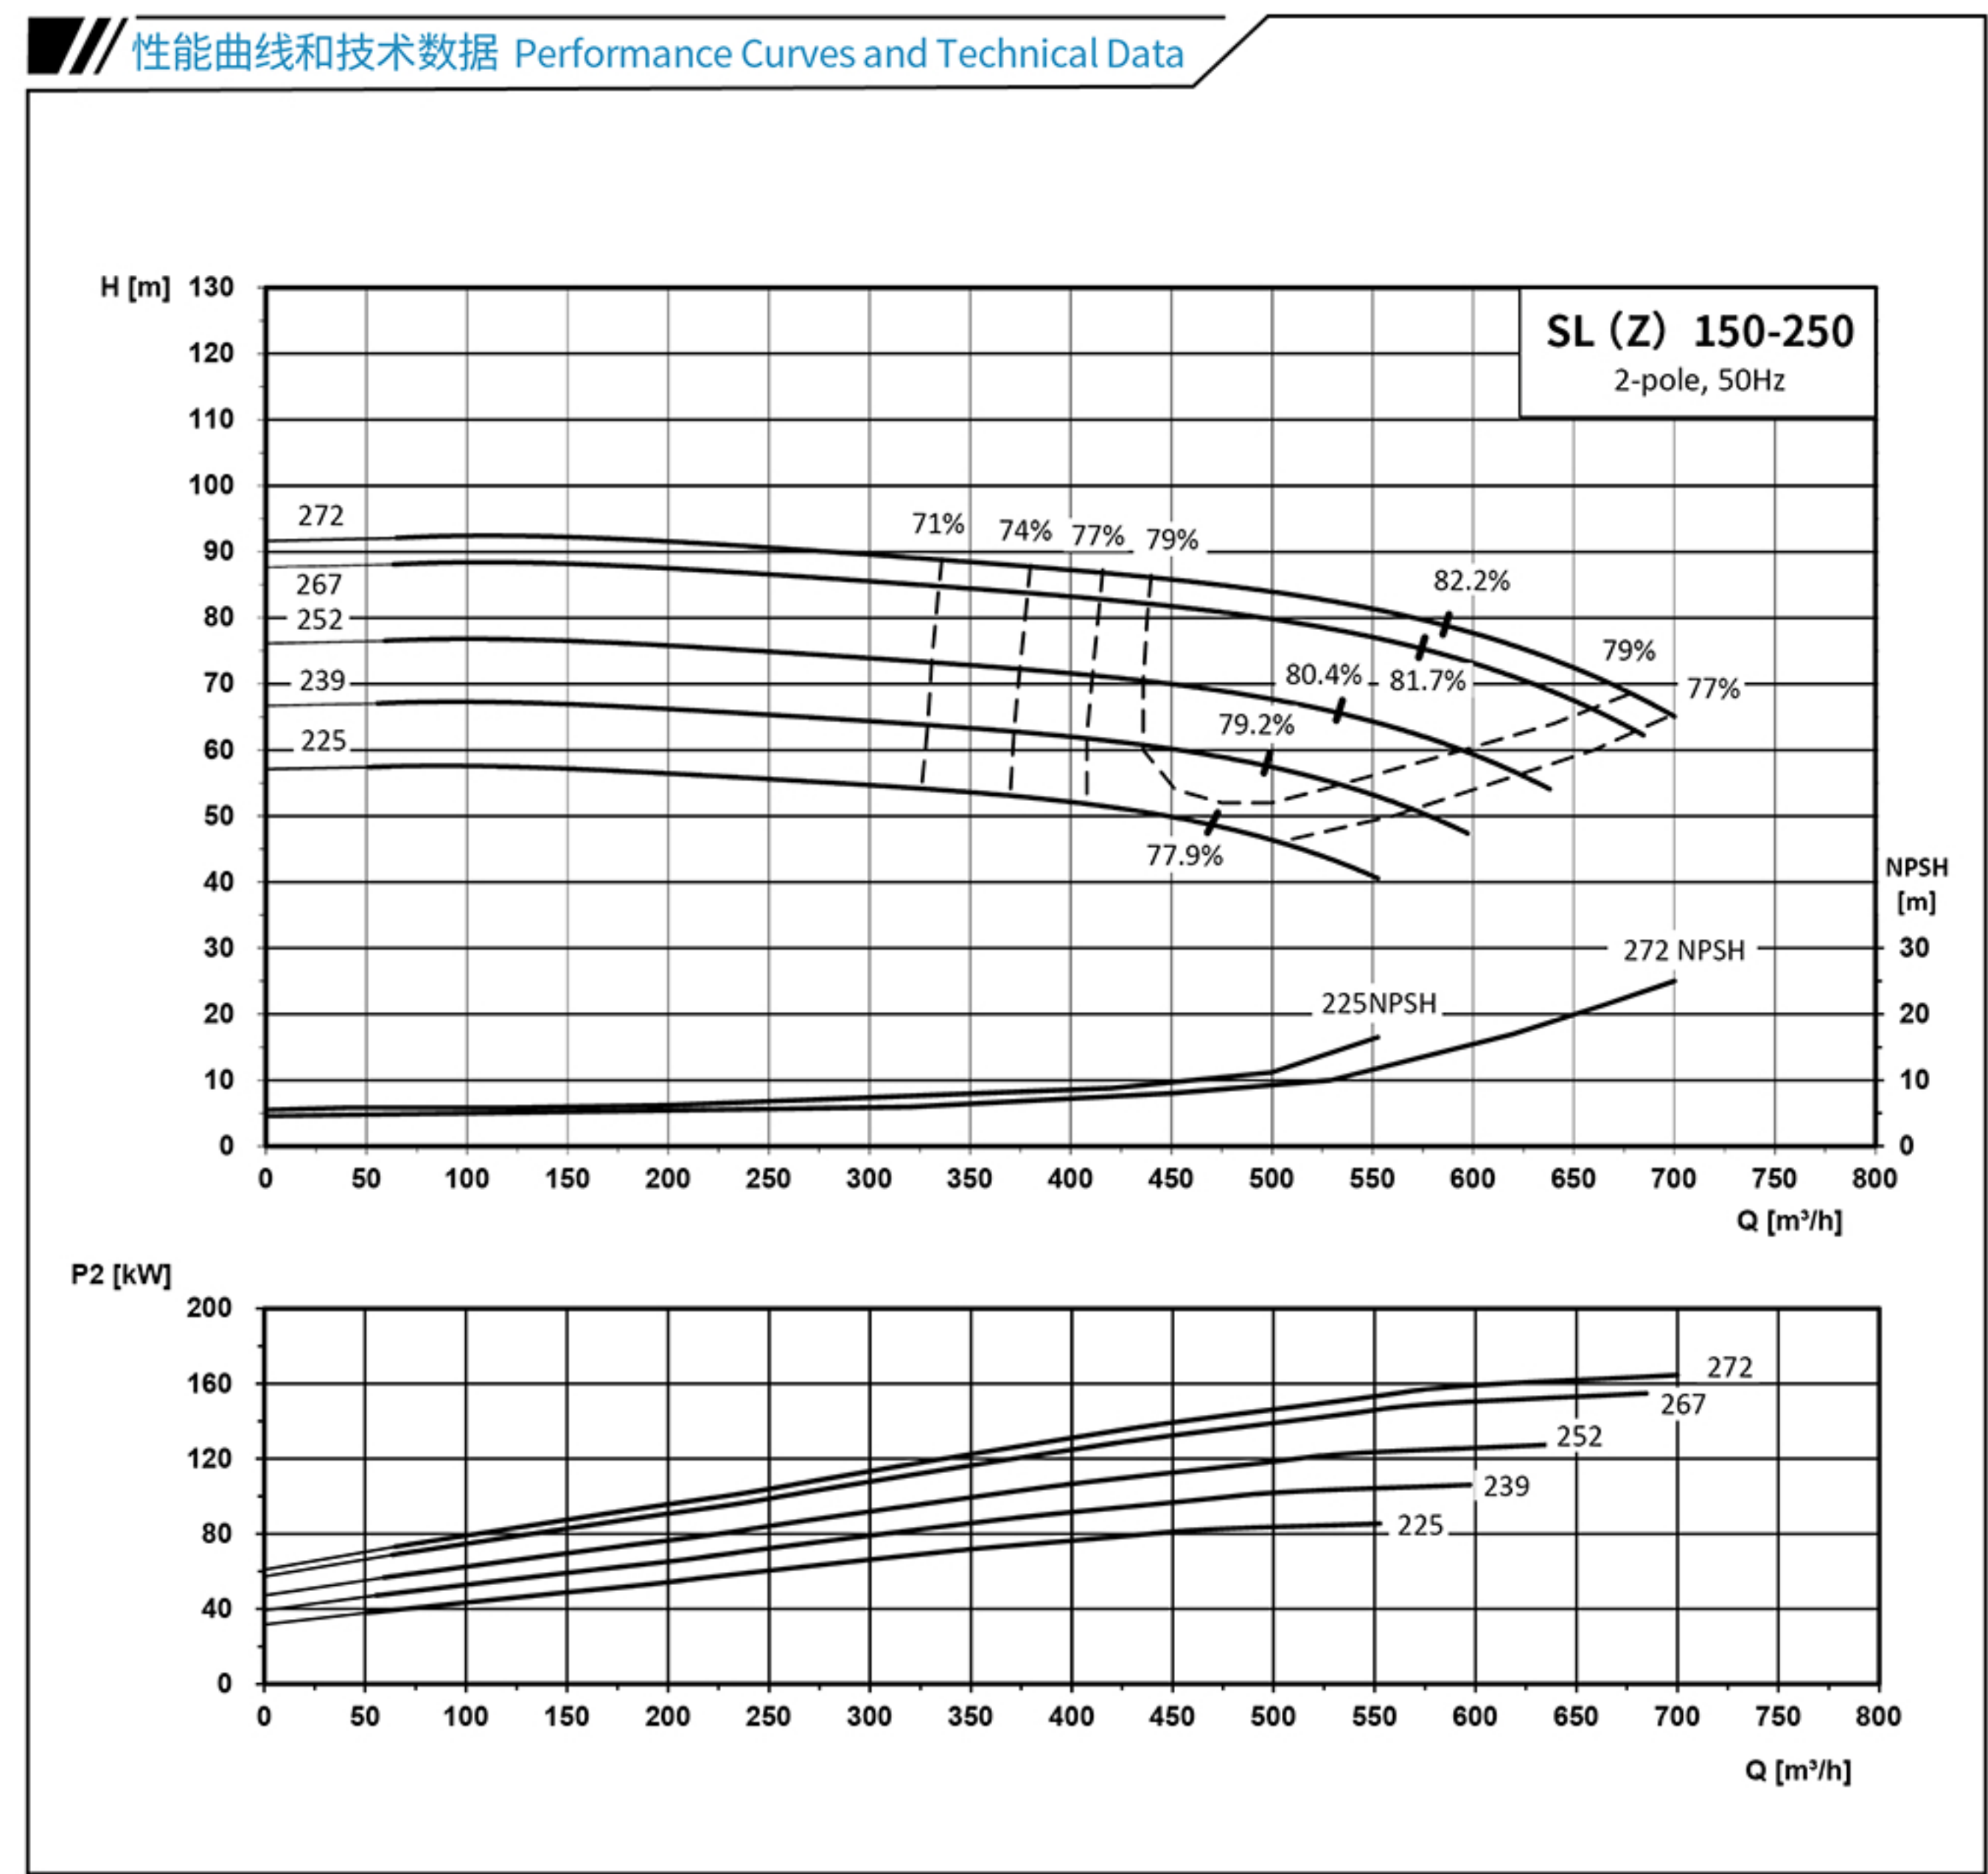

泵型号	Pump Model	SL(Z)150-250-90-2	SL(Z)150-250-110-2	SL(Z)150-250-132-2	SL(Z)150-250-160-2	SL(Z)150-250-185-2
电机型号	Motor Model	YE3-280M-2	YE3-315S-2	YE3-315M-2	YE3-315L1-2	YE3-315L-2
电机功率(kW)	Motor Power(kW)	90	110	132	160	185
叶轮直径(mm)	Impeller Diameter(mm)	225	239	252	267	272


SL(Z) 200-250

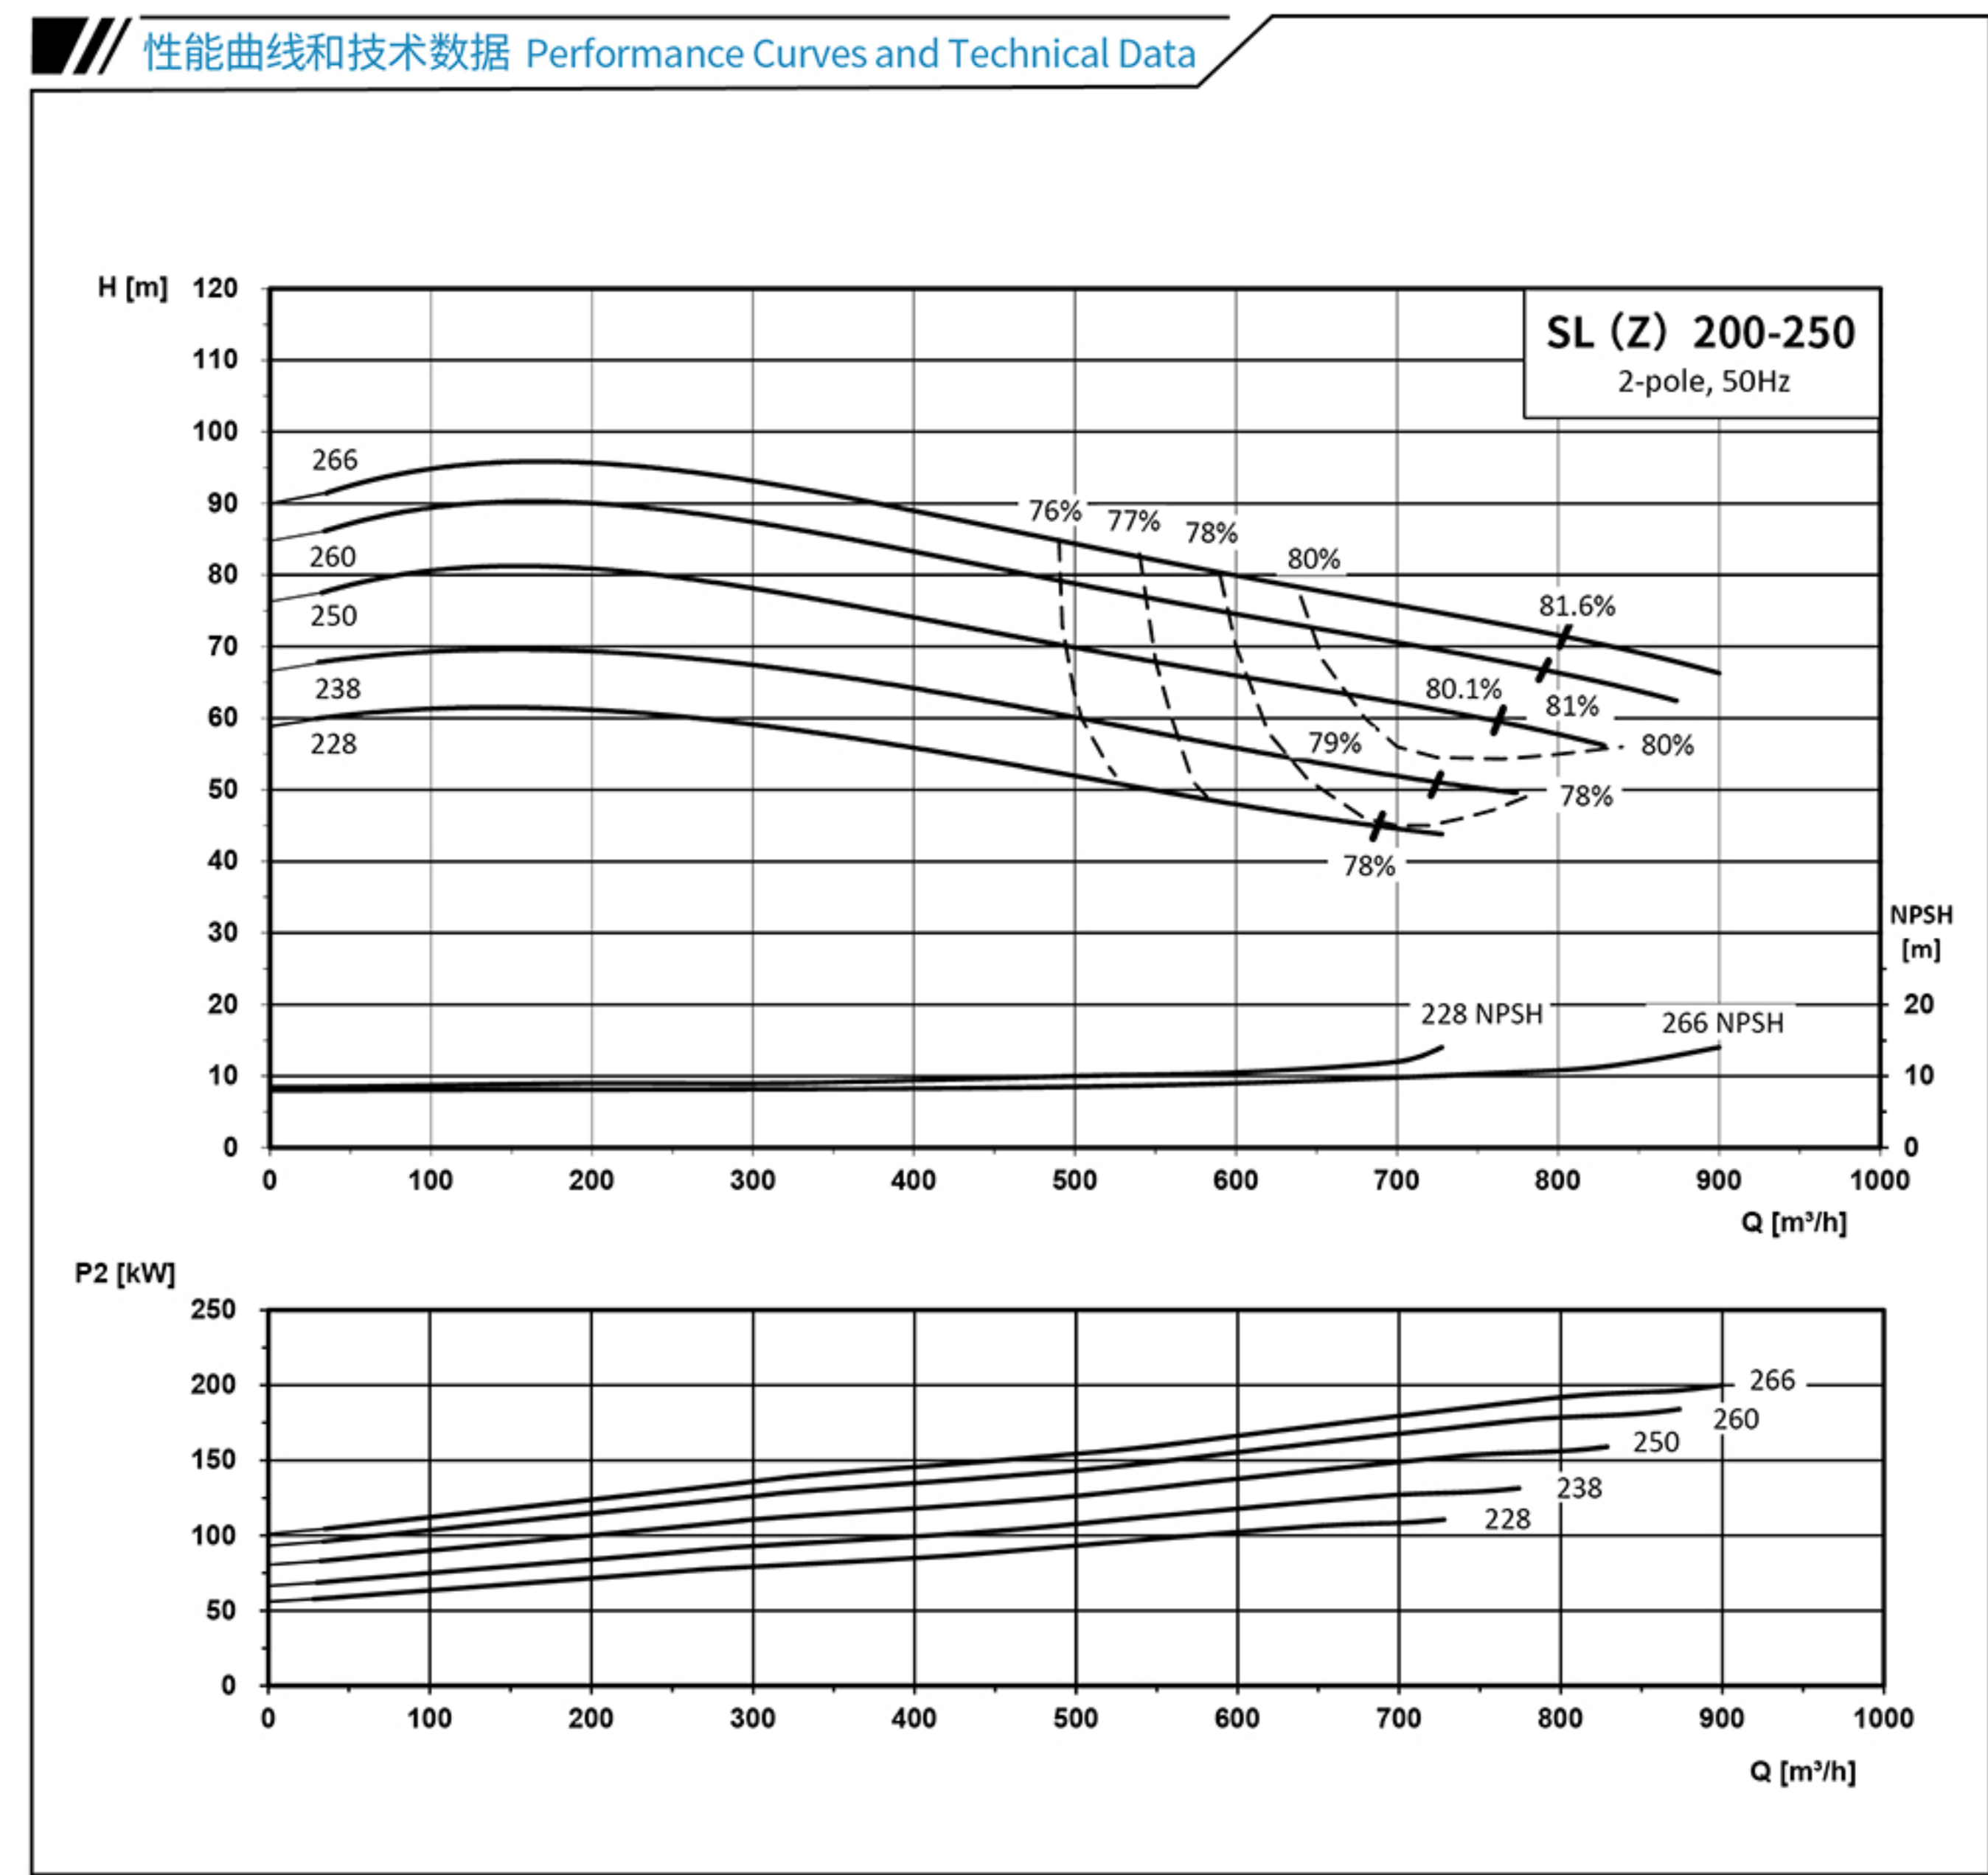

泵型号	Pump Model	SL(Z)200-250-110-2	SL(Z)200-250-132-2	SL(Z)200-250-160-2	SL(Z)200-250-185-2	SL(Z)200-250-200-2
电机型号	Motor Model	YE3-315S-2	YE3-315M-2	YE3-315L1-2	YE3-315L-2	YE3-315L2-2
电机功率(kW)	Motor Power(kW)	110	132	160	185	200
叶轮直径(mm)	Impeller Diameter(mm)	228	238	250	260	266

SL(Z) 50-315


性能曲线和技术数据 Performance Curves and Technical Data

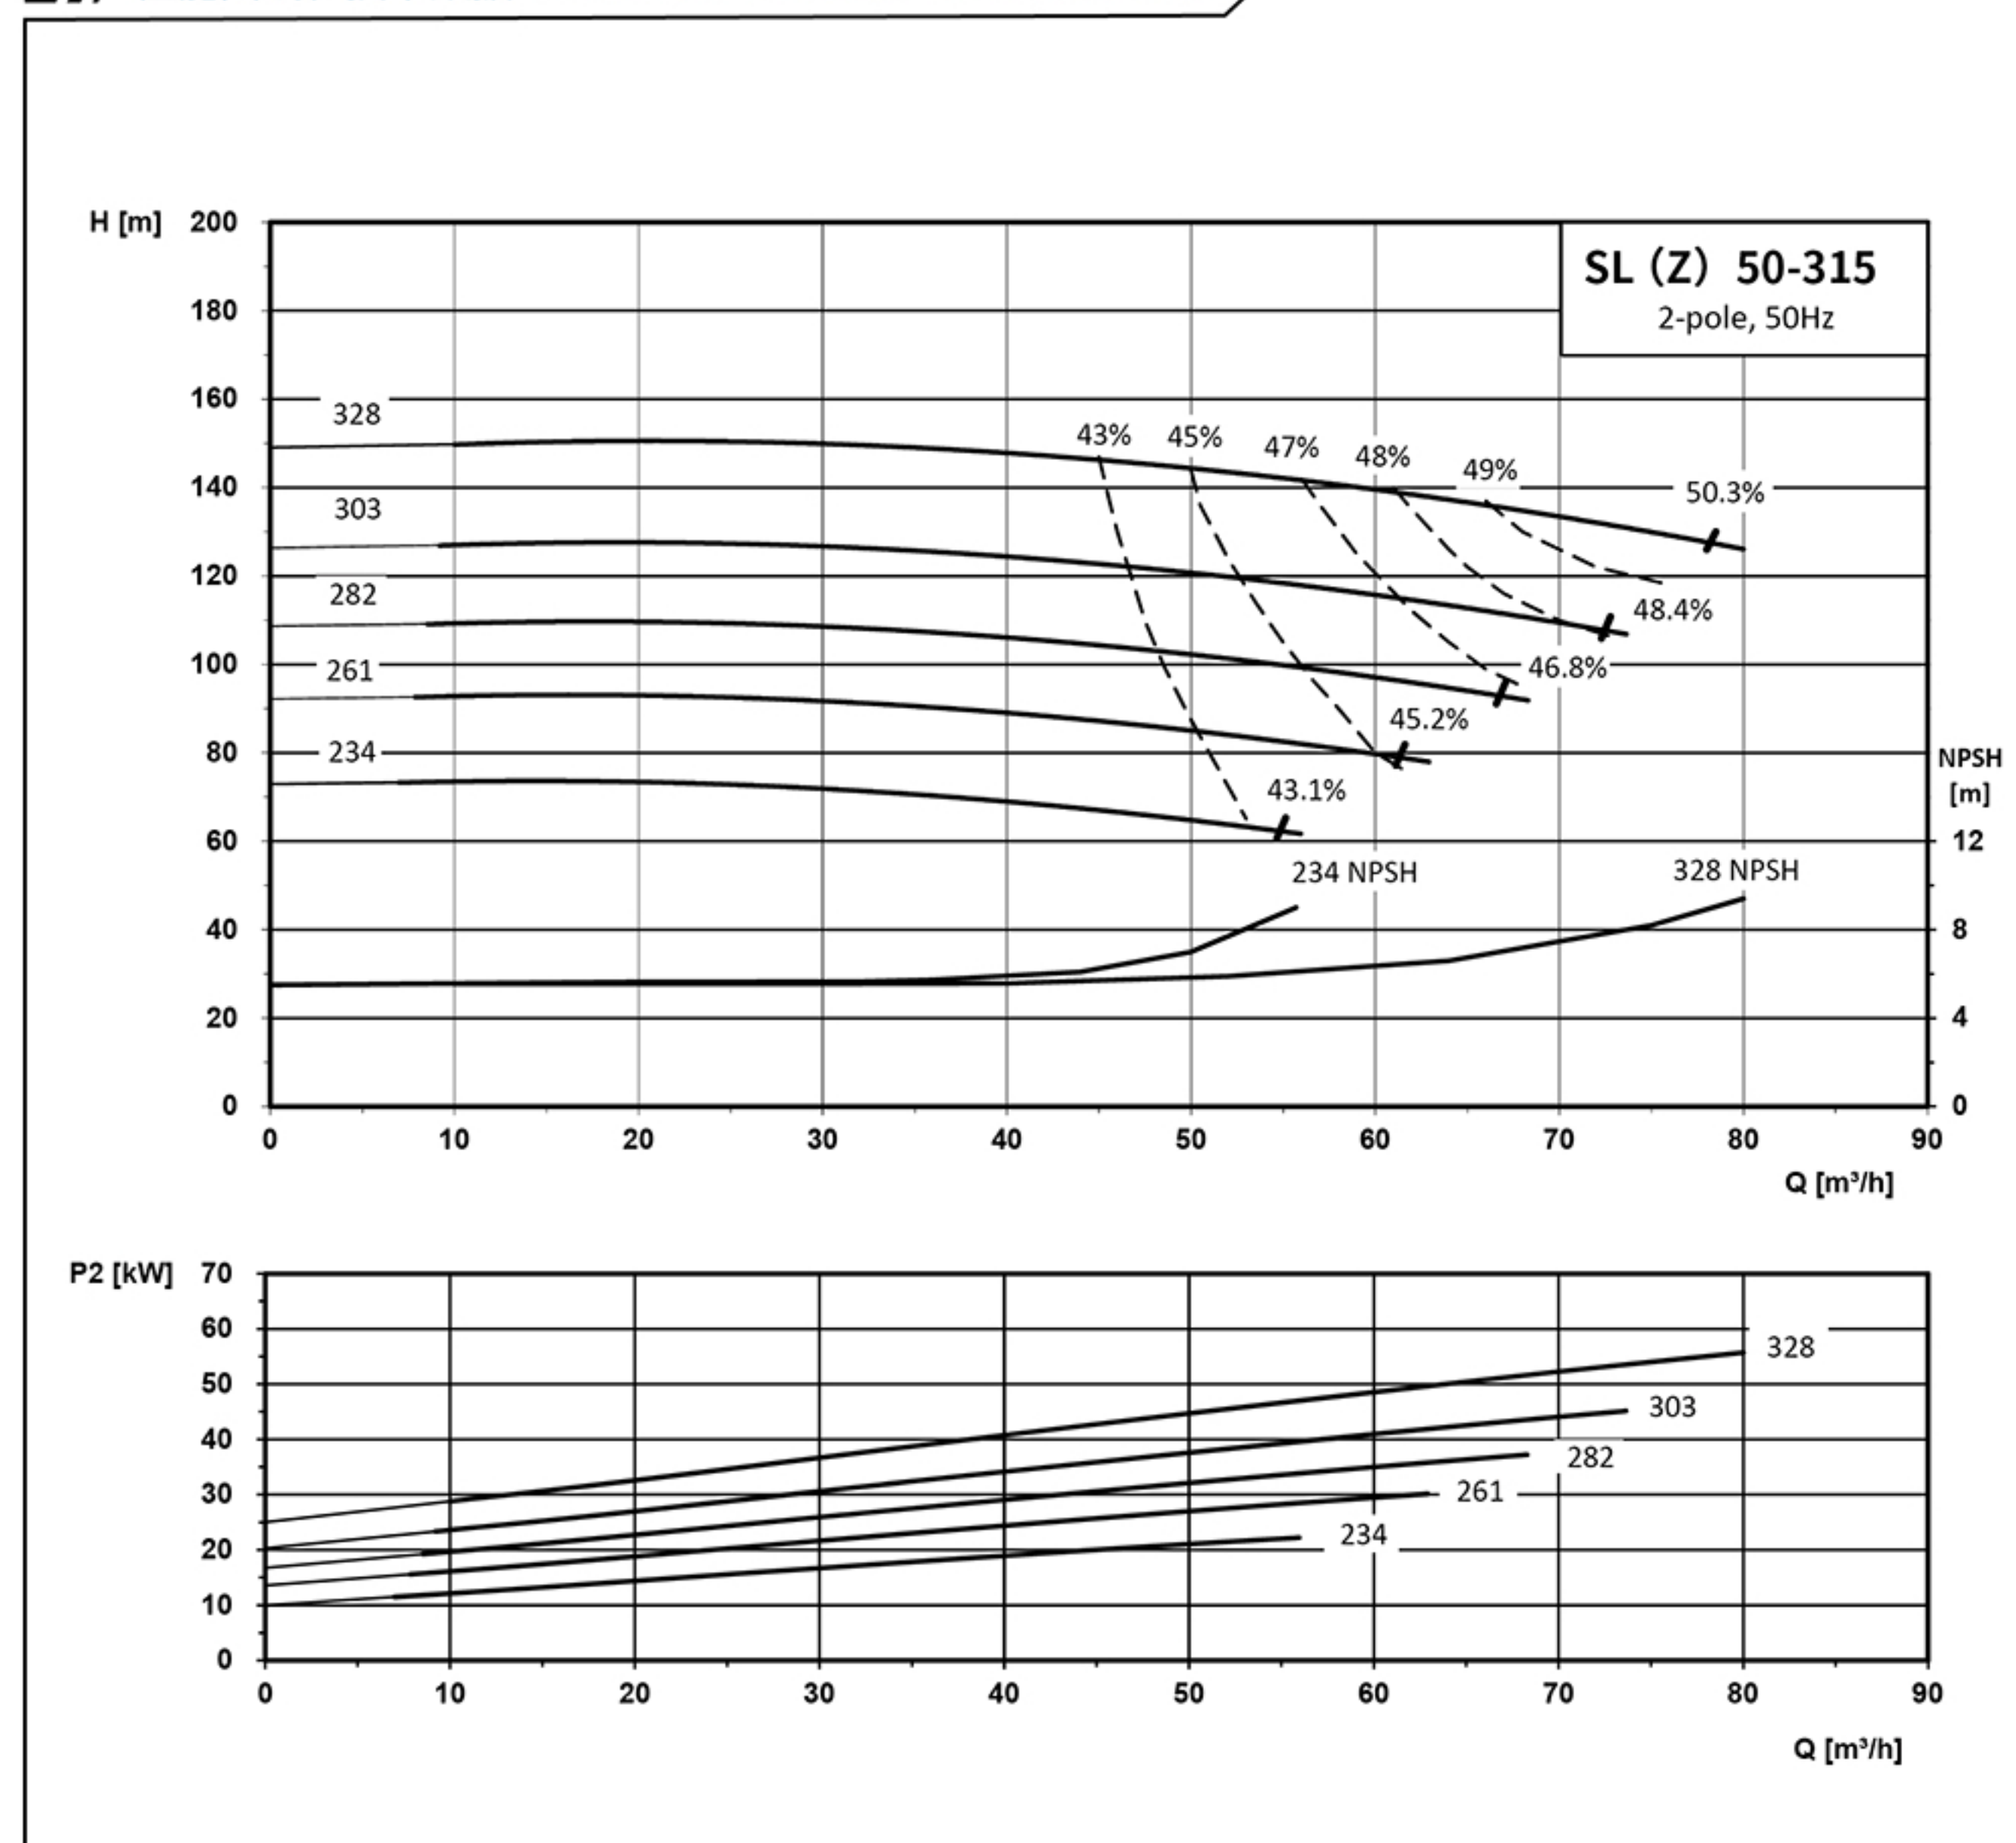

泵型号	Pump Model	SL(Z)50-315-22-2	SL(Z)50-315-30-2	SL(Z)50-315-37-2	SL(Z)50-315-45-2	SL(Z)50-315-55-2
电机型号	Motor Model	YE3-180M-2	YE3-200L1-2	YE3-200L2-2	YE3-225M-2	YE3-250M-2
电机功率(kW)	Motor Power(kW)	22	30	37	45	55
叶轮直径(mm)	Impeller Diameter(mm)	234	261	282	303	328

SL(Z) 65-315


性能曲线和技术数据 Performance Curves and Technical Data

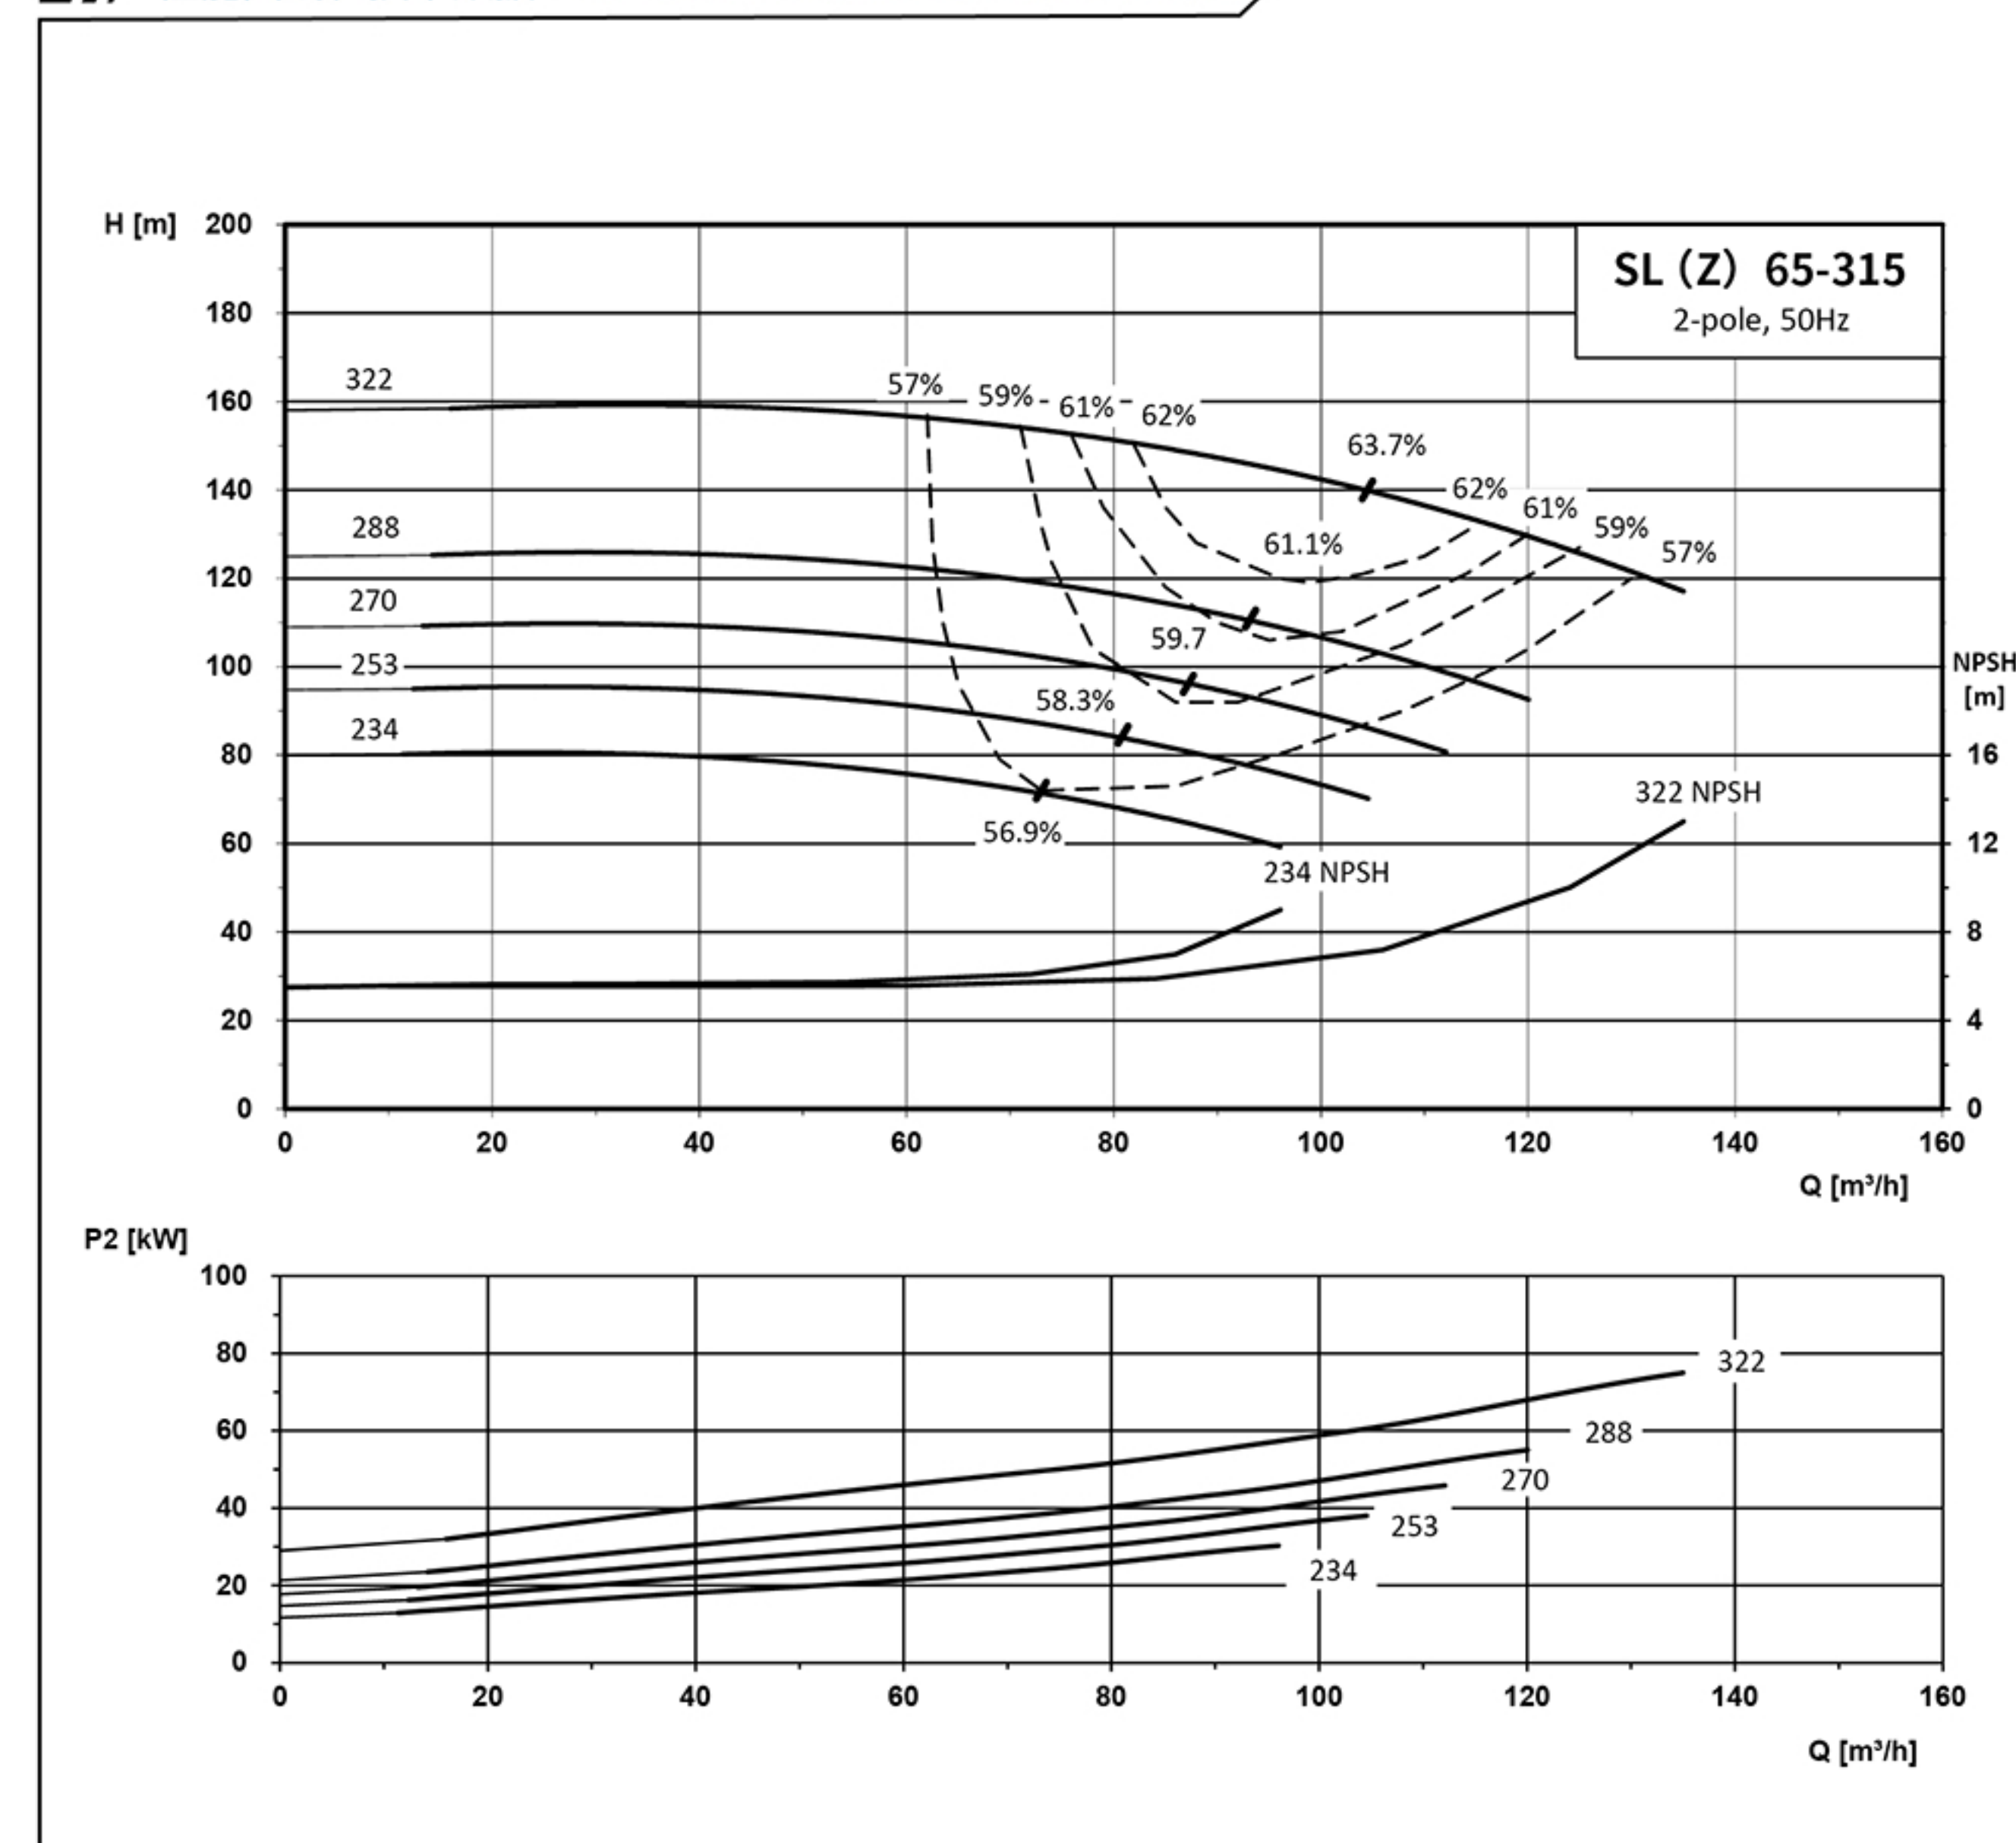

泵型号	Pump Model	SL(Z)65-315-30-2	SL(Z)65-315-37-2	SL(Z)65-315-45-2	SL(Z)65-315-55-2	SL(Z)65-315-75-2
电机型号	Motor Model	YE3-200L1-2	YE3-200L2-2	YE3-225M-2	YE3-250M-2	YE3-280S-2
电机功率(kW)	Motor Power(kW)	30	37	45	55	75
叶轮直径(mm)	Impeller Diameter(mm)	234	253	270	288	322

SL(Z) 80-315


性能曲线和技术数据 Performance Curves and Technical Data

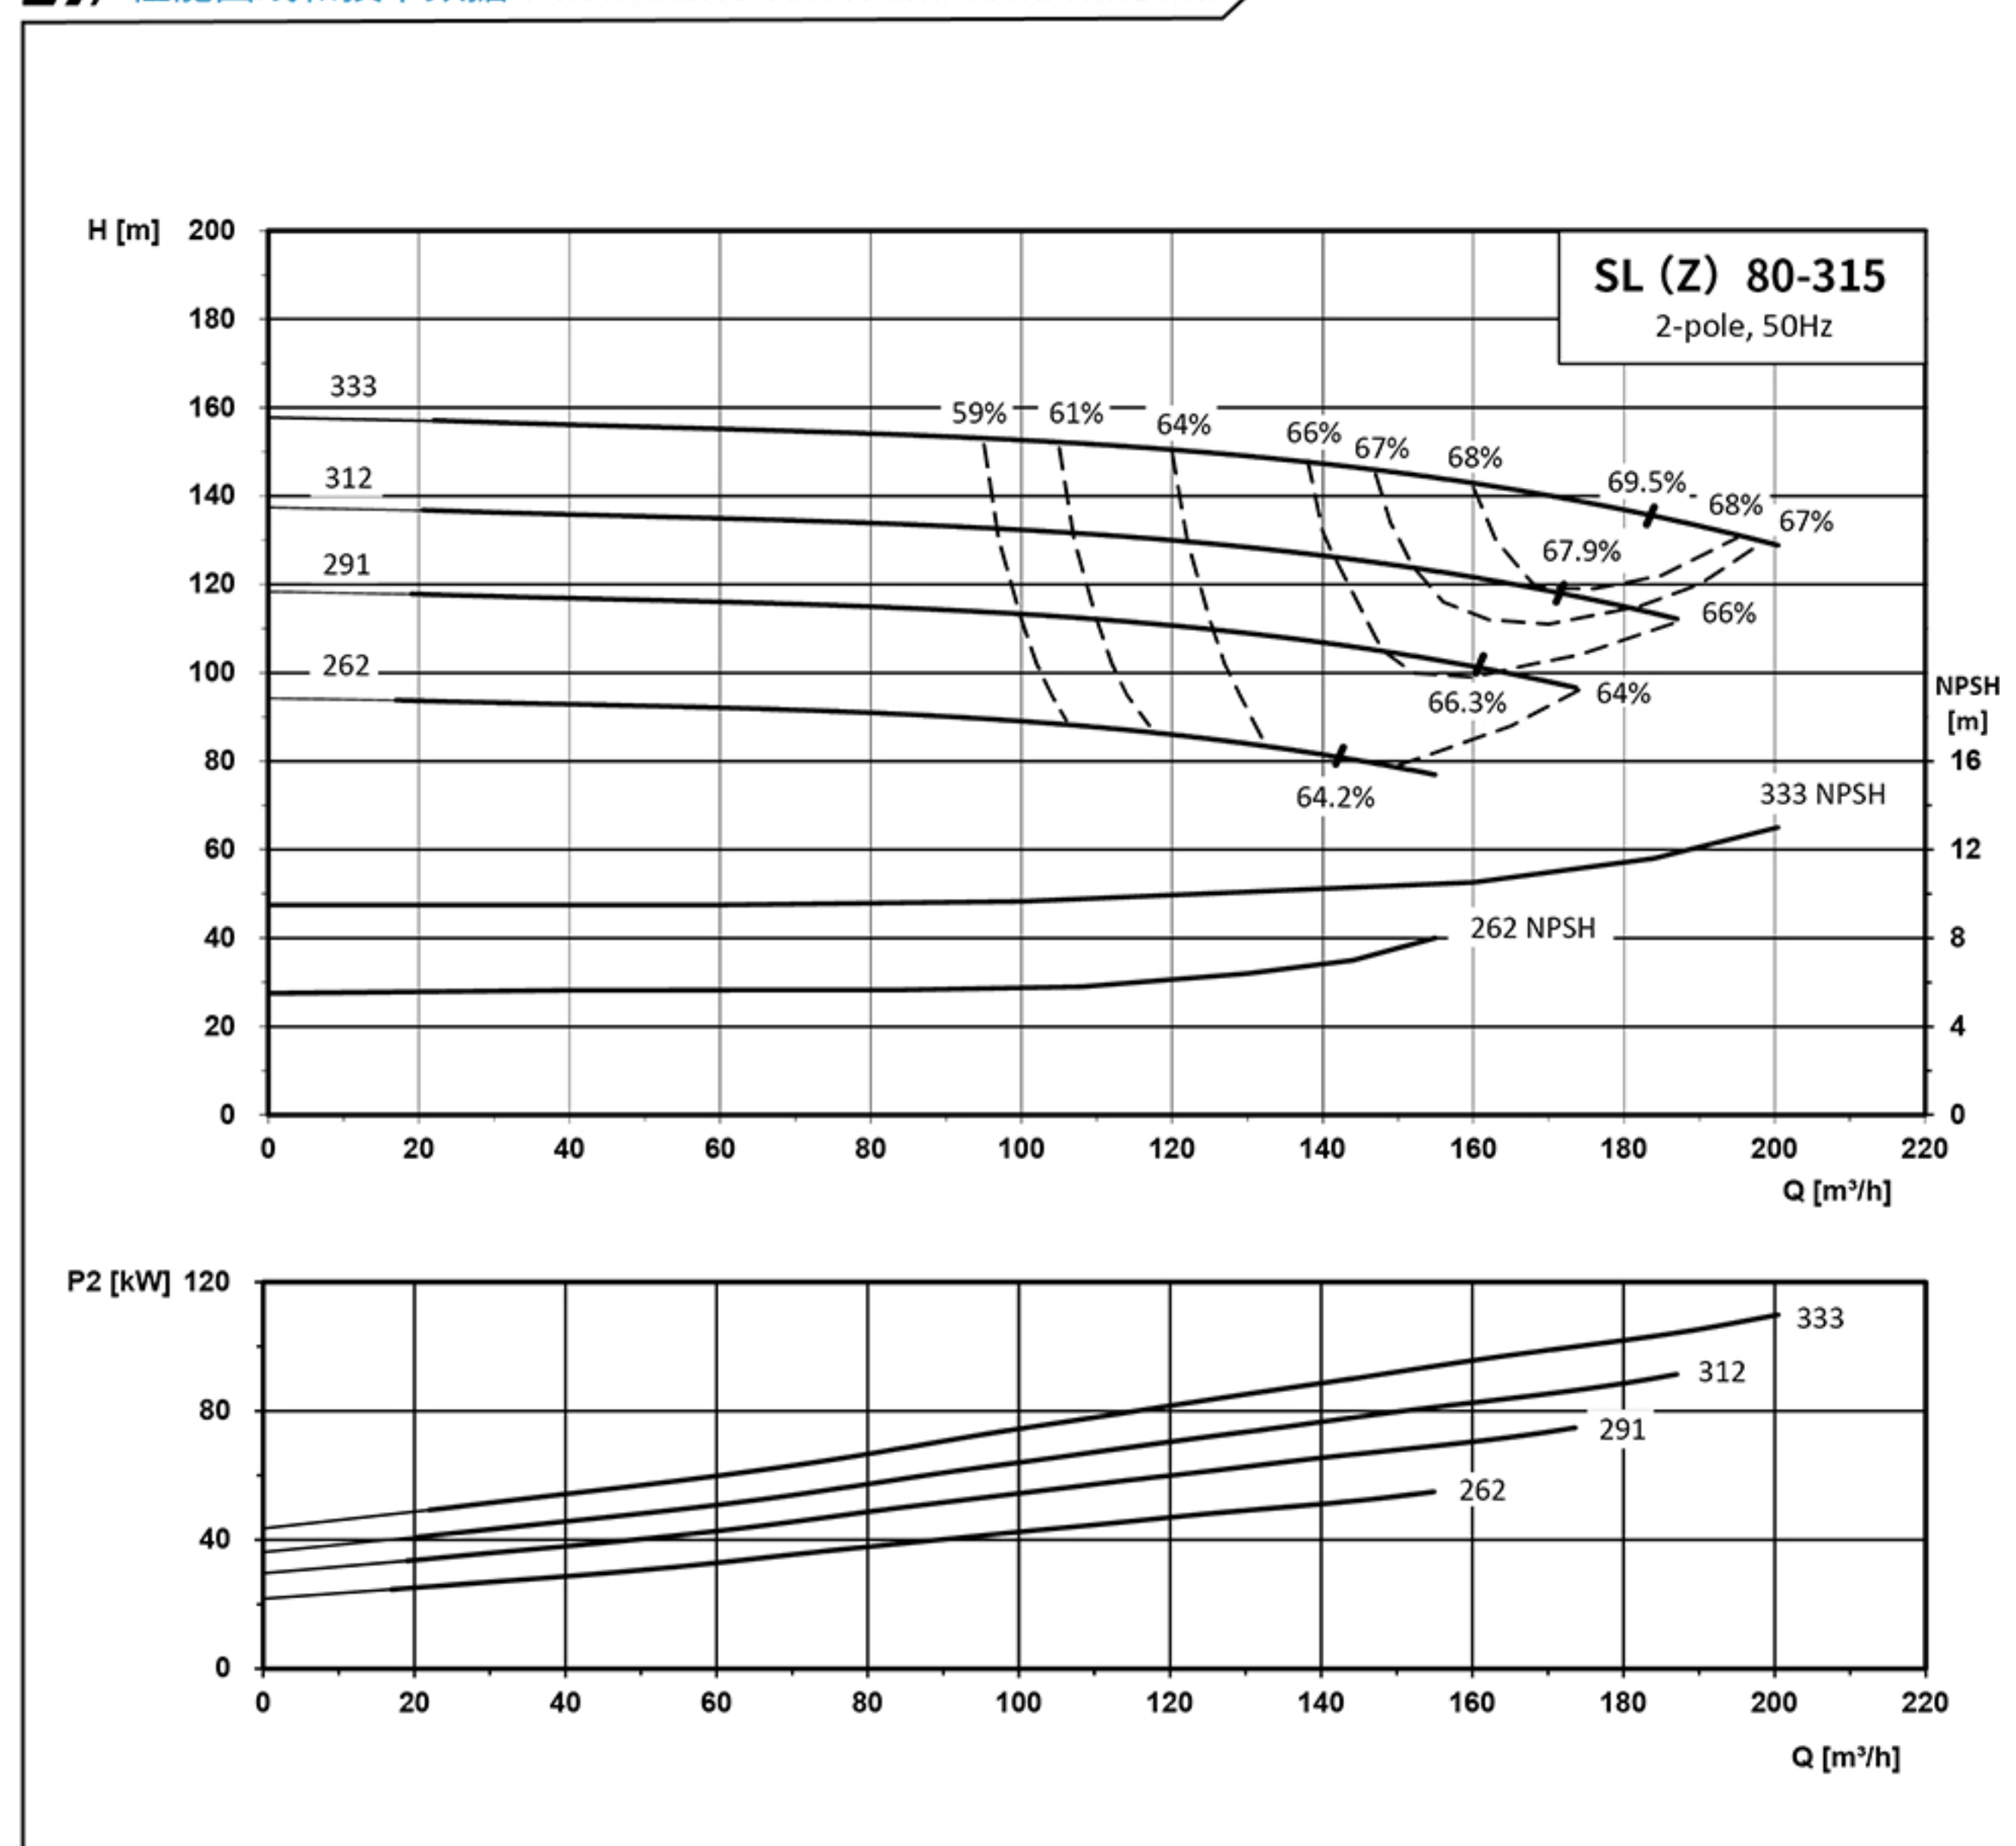

泵型号	Pump Model	SL(Z)80-315-55-2	SL(Z)80-315-75-2	SL(Z)80-315-90-2	SL(Z)80-315-110-2
电机型号	Motor Model	YE3-250M-2	YE3-280S-2	YE3-280M-2	YE3-315S-2
电机功率(kW)	Motor Power(kW)	55	75	90	110
叶轮直径(mm)	Impeller Diameter(mm)	262	291	312	333


SL(Z) 100-315

性能曲线和技术数据 Performance Curves and Technical Data

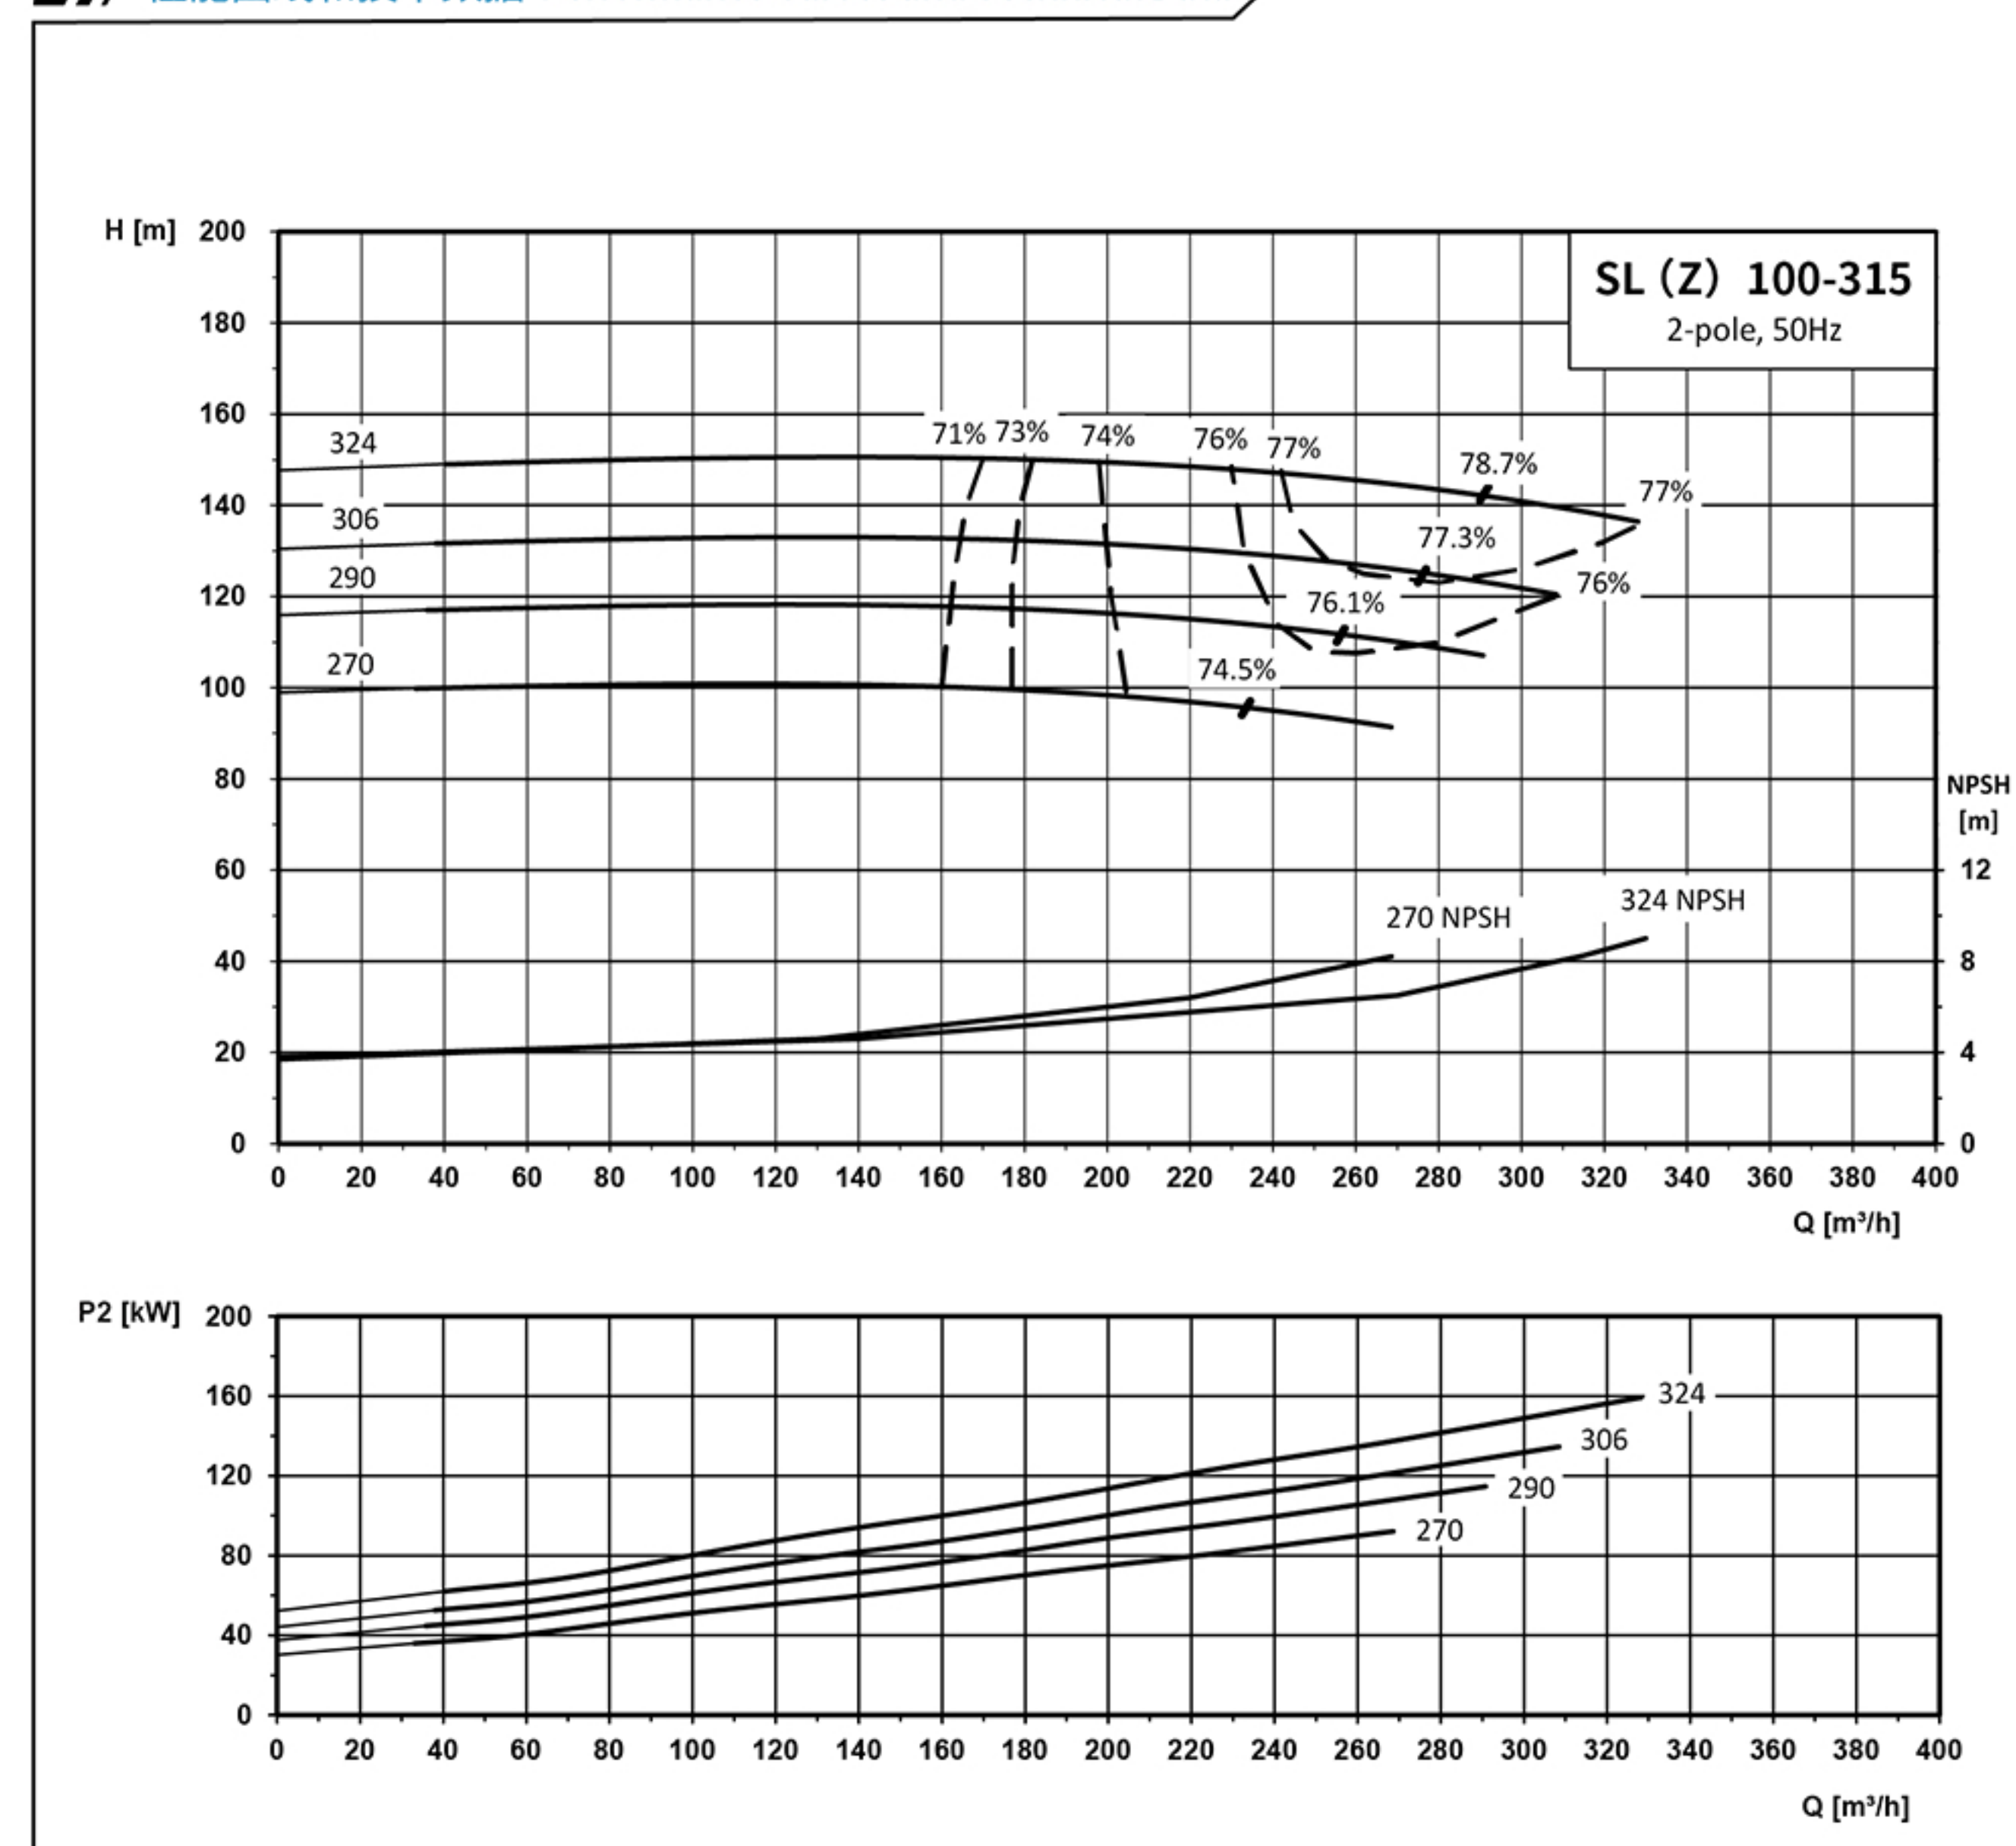


泵型号	Pump Model	SL(Z)100-315-90-2	SL(Z)100-315-110-2	SL(Z)100-315-132-2	SL(Z)100-315-160-2
电机型号	Motor Model	YE3-280M-2	YE3-315S-2	YE3-315M-2	YE3-315L1-2
电机功率(kW)	Motor Power(kW)	90	110	132	160
叶轮直径(mm)	Impeller Diameter(mm)	270	290	306	324

SL(Z) 125-315

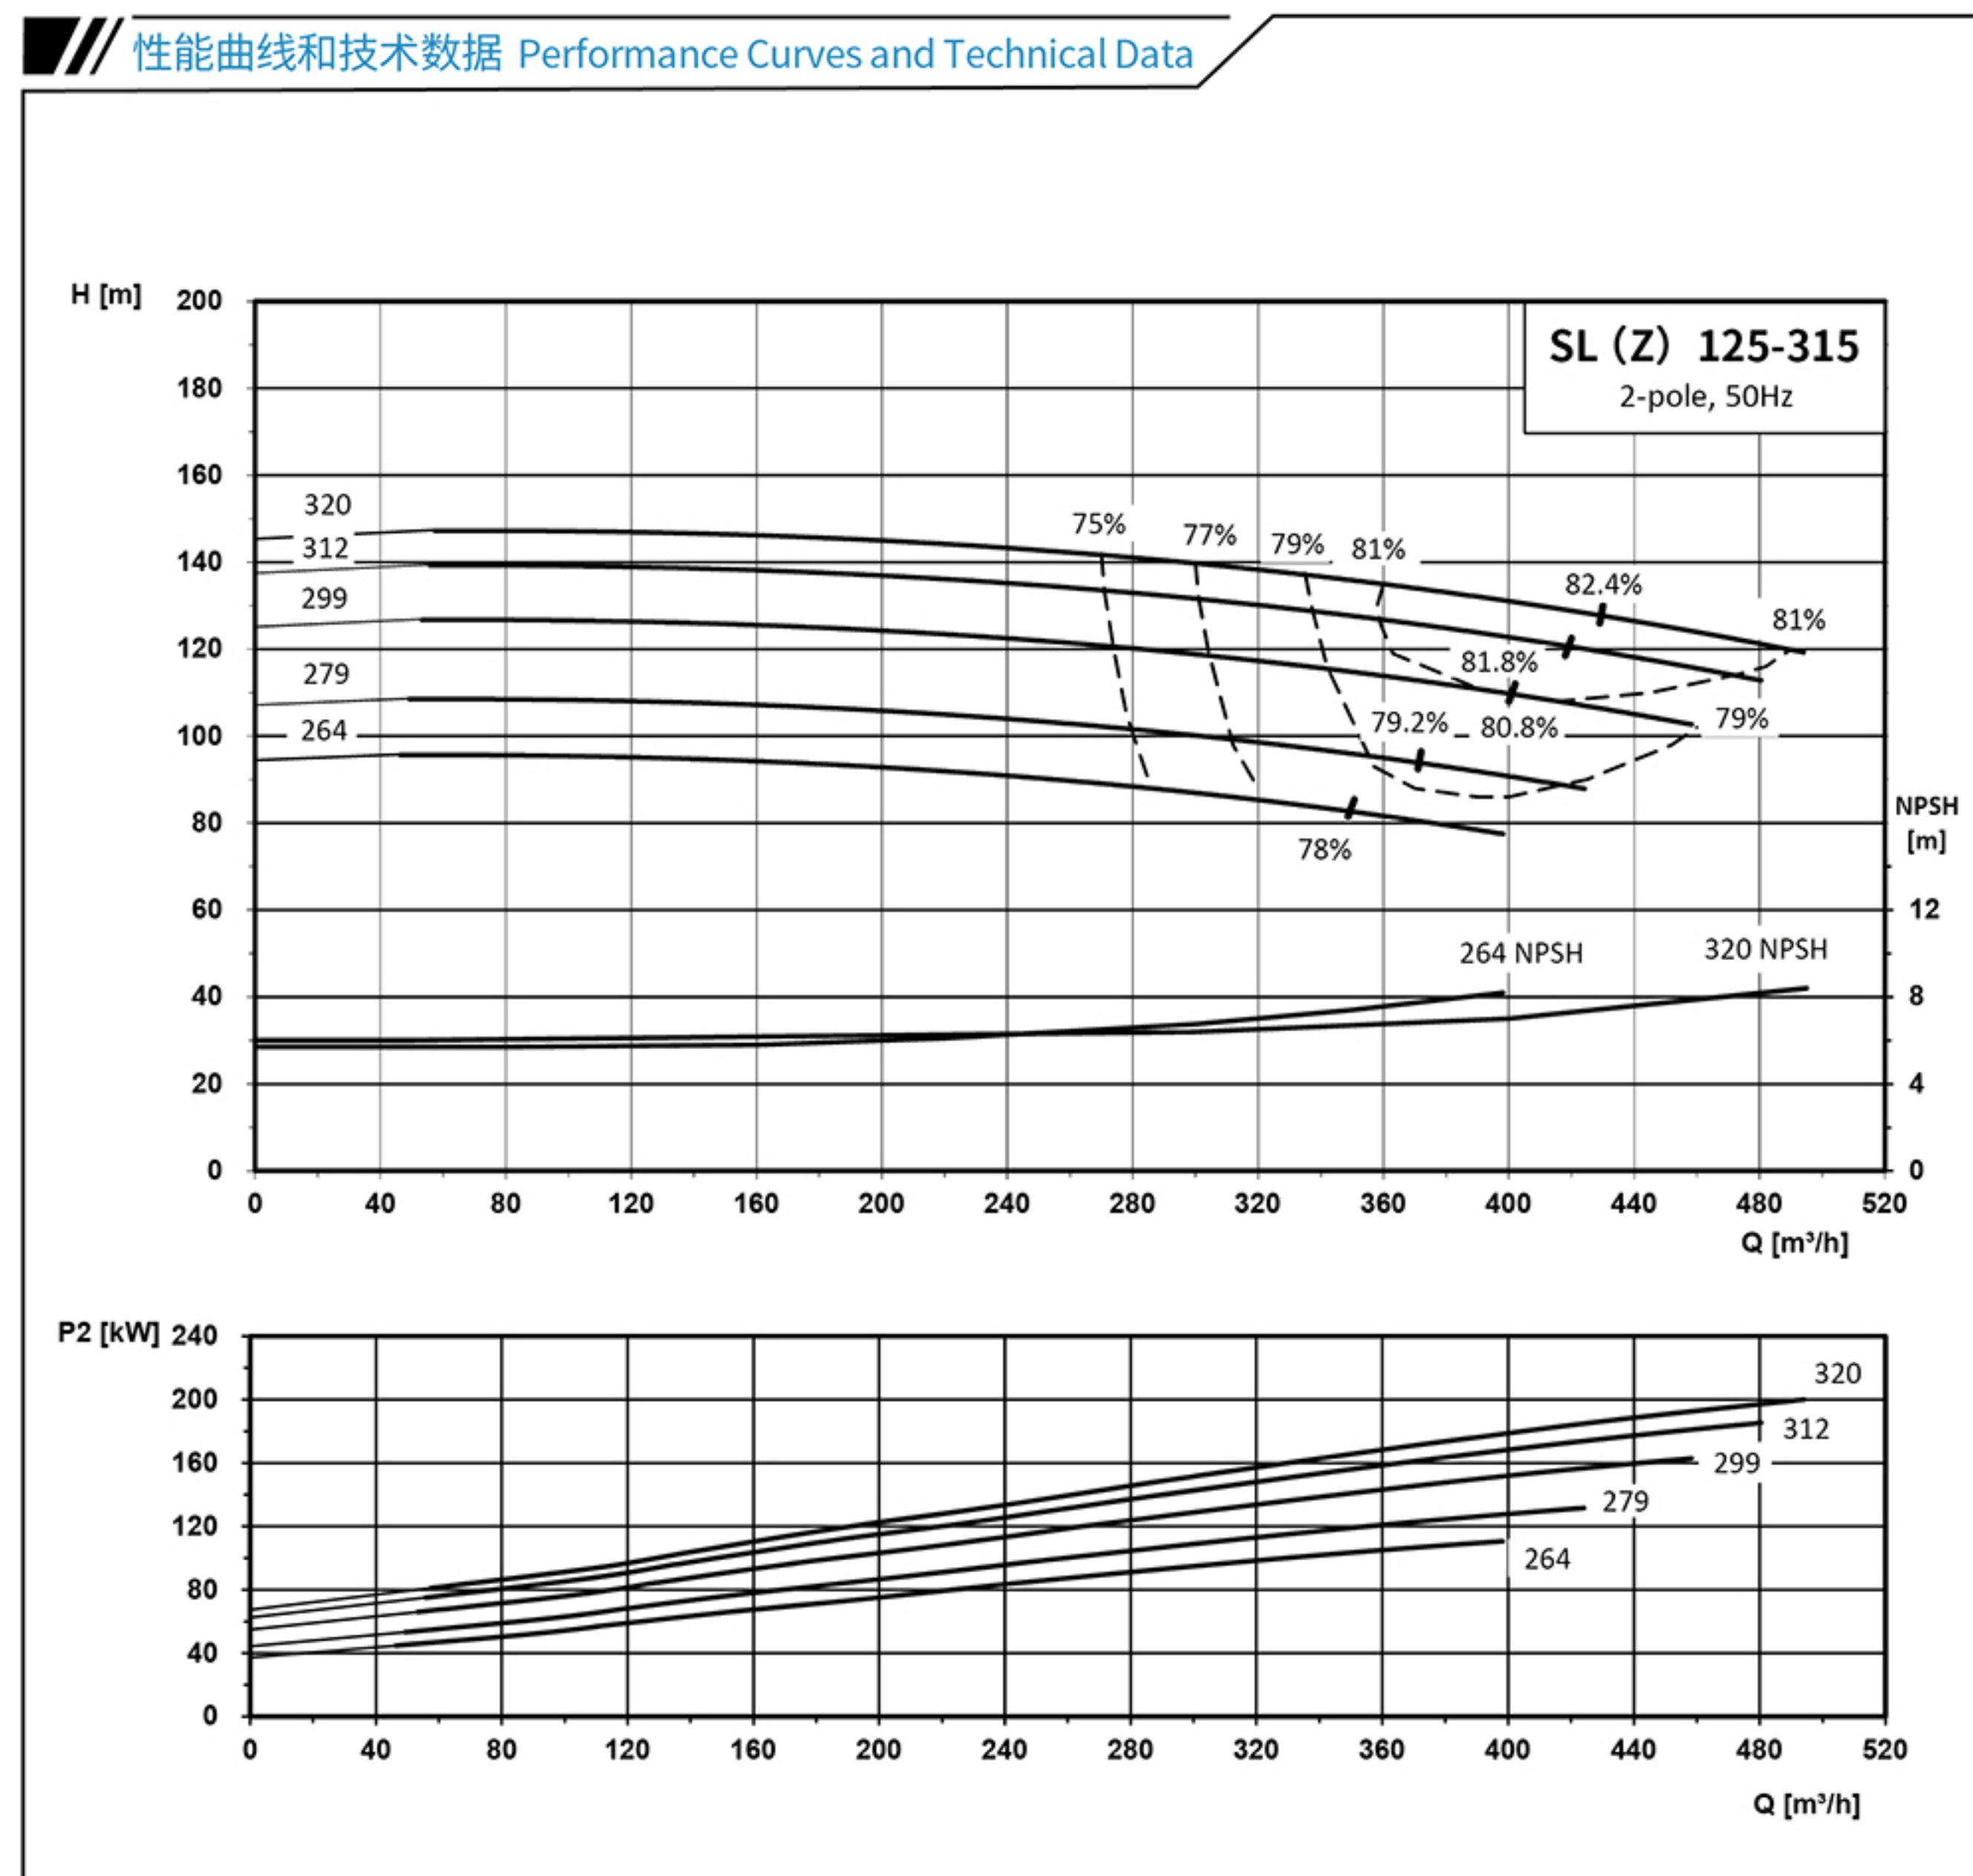


泵型号	Pump Model	SL(Z)125-315-110-2	SL(Z)125-315-132-2	SL(Z)125-315-160-2	SL(Z)125-315-185-2	SL(Z)125-315-200-2
电机型号	Motor Model	YE3-315S-2	YE3-315M-2	YE3-315L1-2	YE3-315L-2	YE3-315L2-2
电机功率(kW)	Motor Power(kW)	110	132	160	185	200
叶轮直径(mm)	Impeller Diameter(mm)	264	279	299	312	320

SL(Z) 150-315

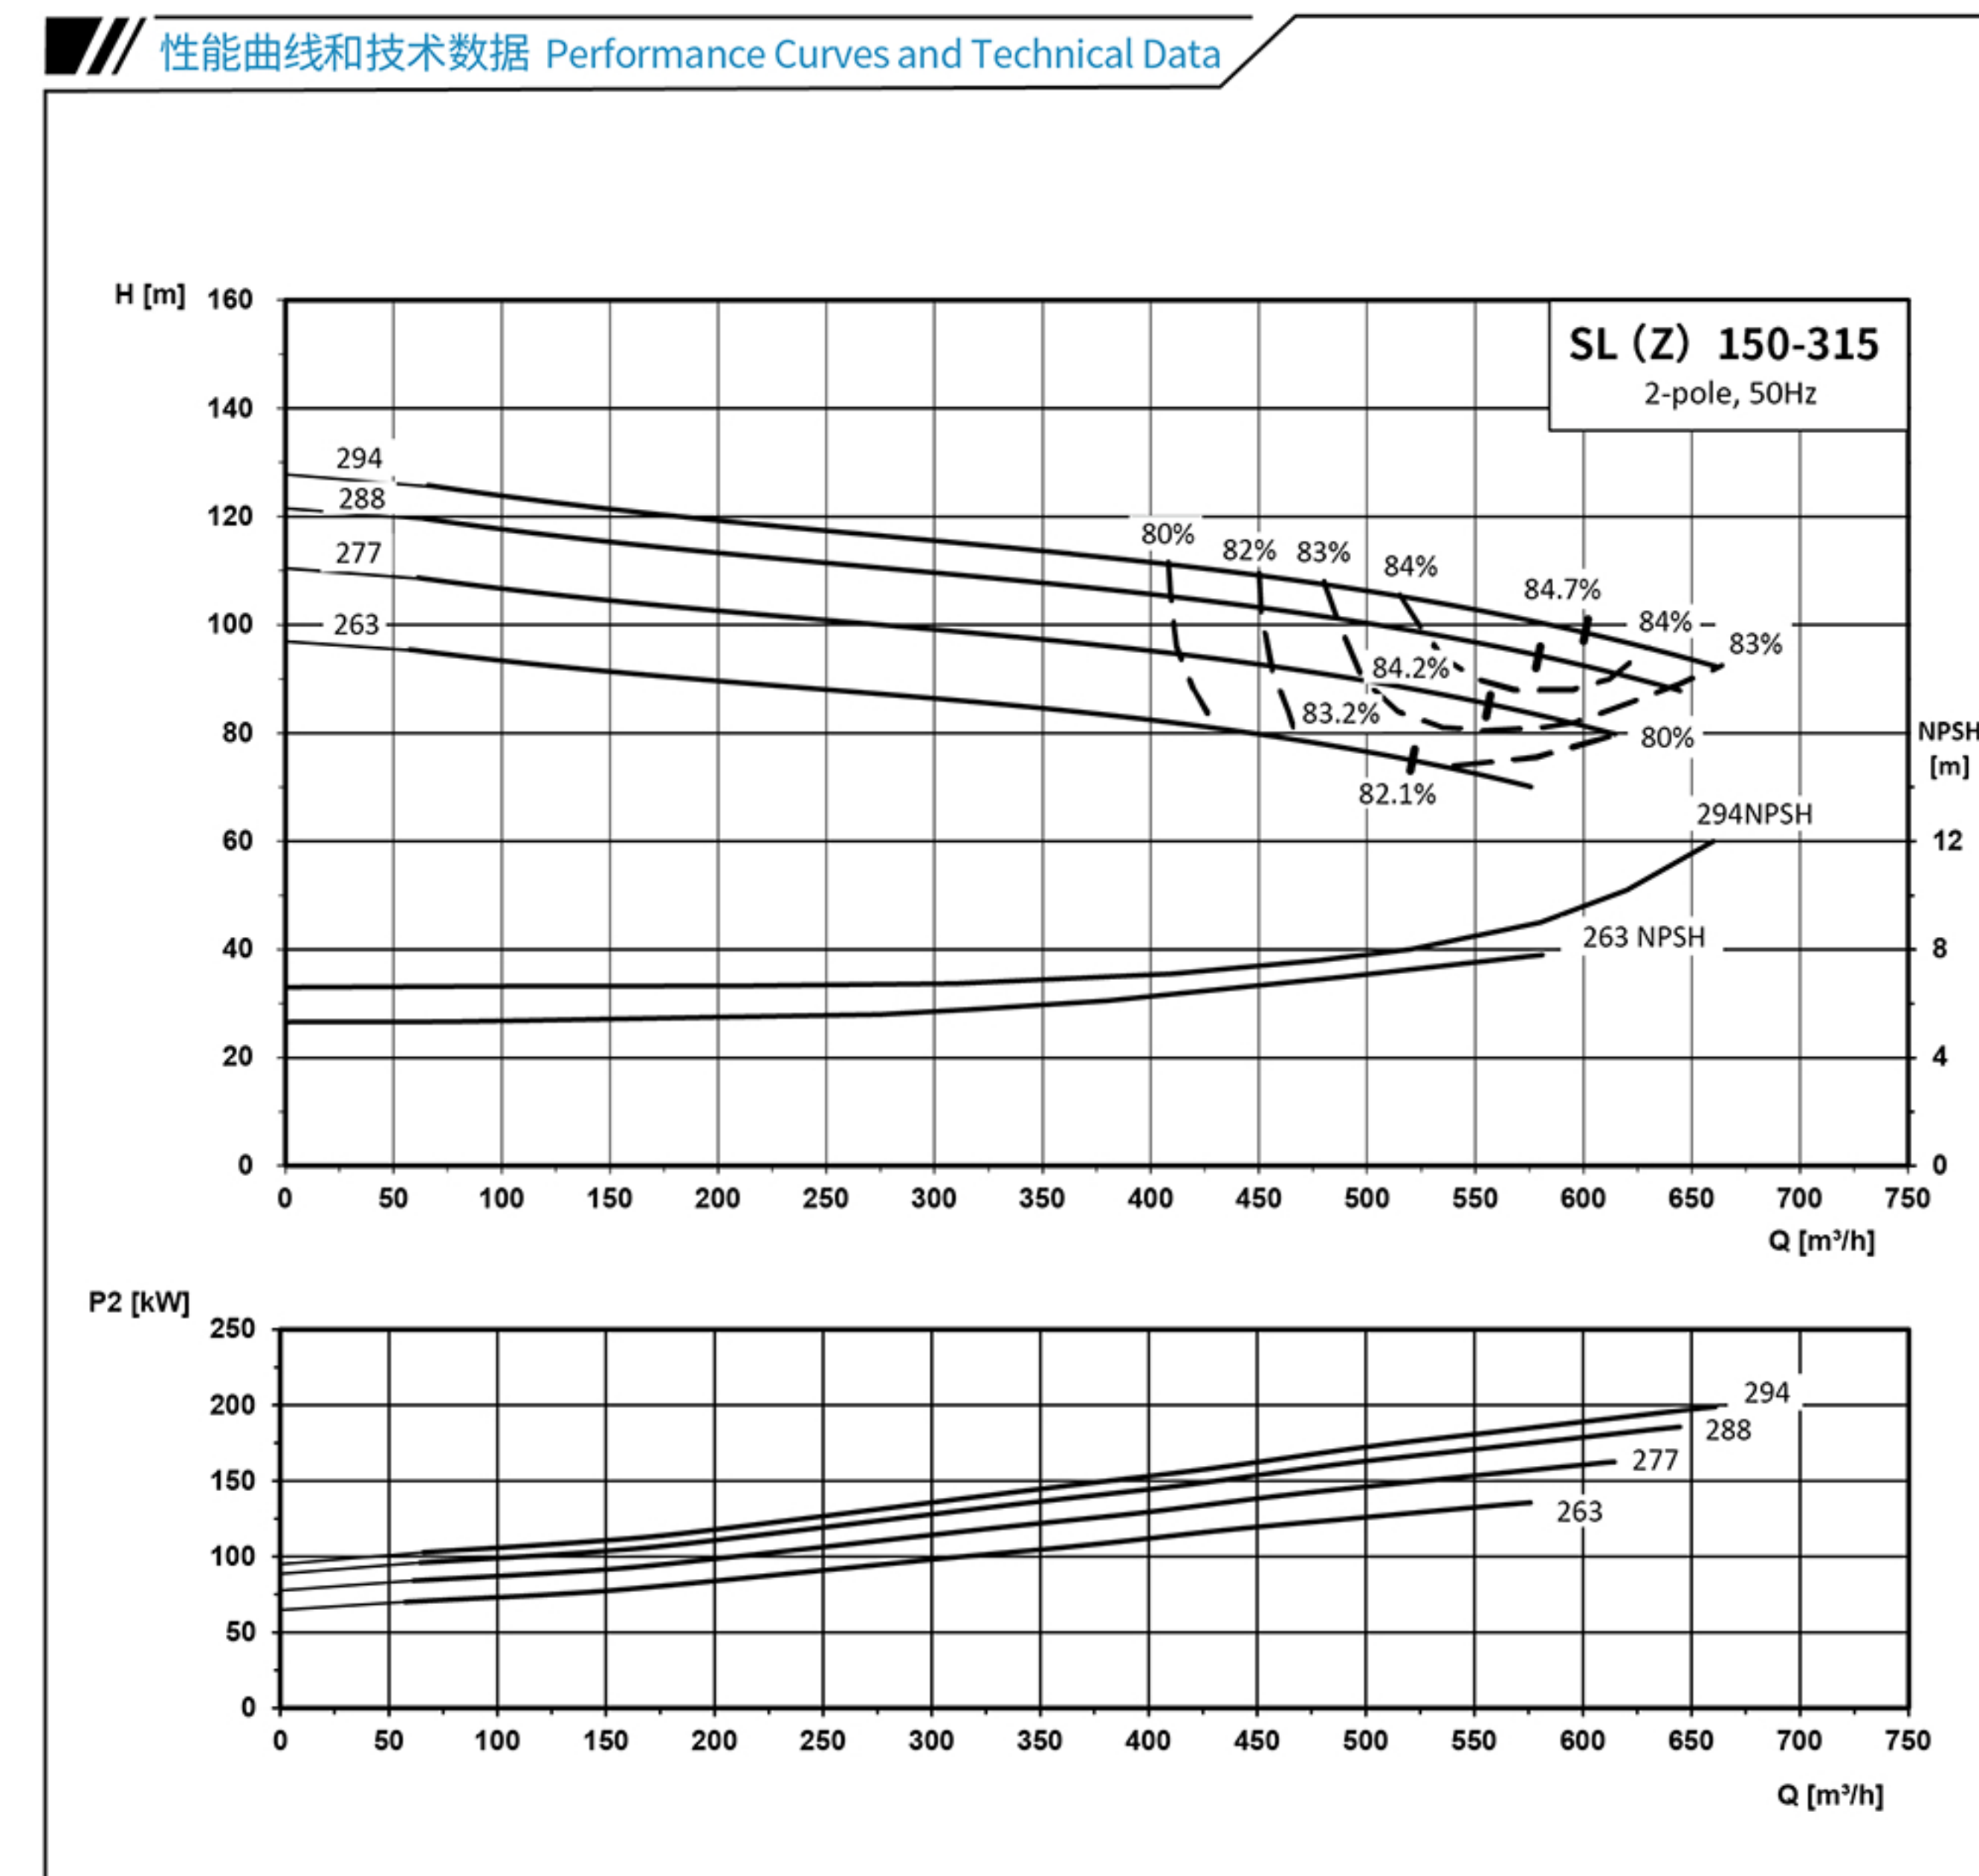


泵型号	Pump Model	SL(Z)150-315-132-2	SL(Z)150-315-160-2	SL(Z)150-315-185-2	SL(Z)150-315-200-2
电机型号	Motor Model	YE3-315M-2	YE3-315L1-2	YE3-315L-2	YE3-315L2-2
电机功率(kW)	Motor Power(kW)	132	160	185	200
叶轮直径(mm)	Impeller Diameter(mm)	263	277	288	294

SL 32-125

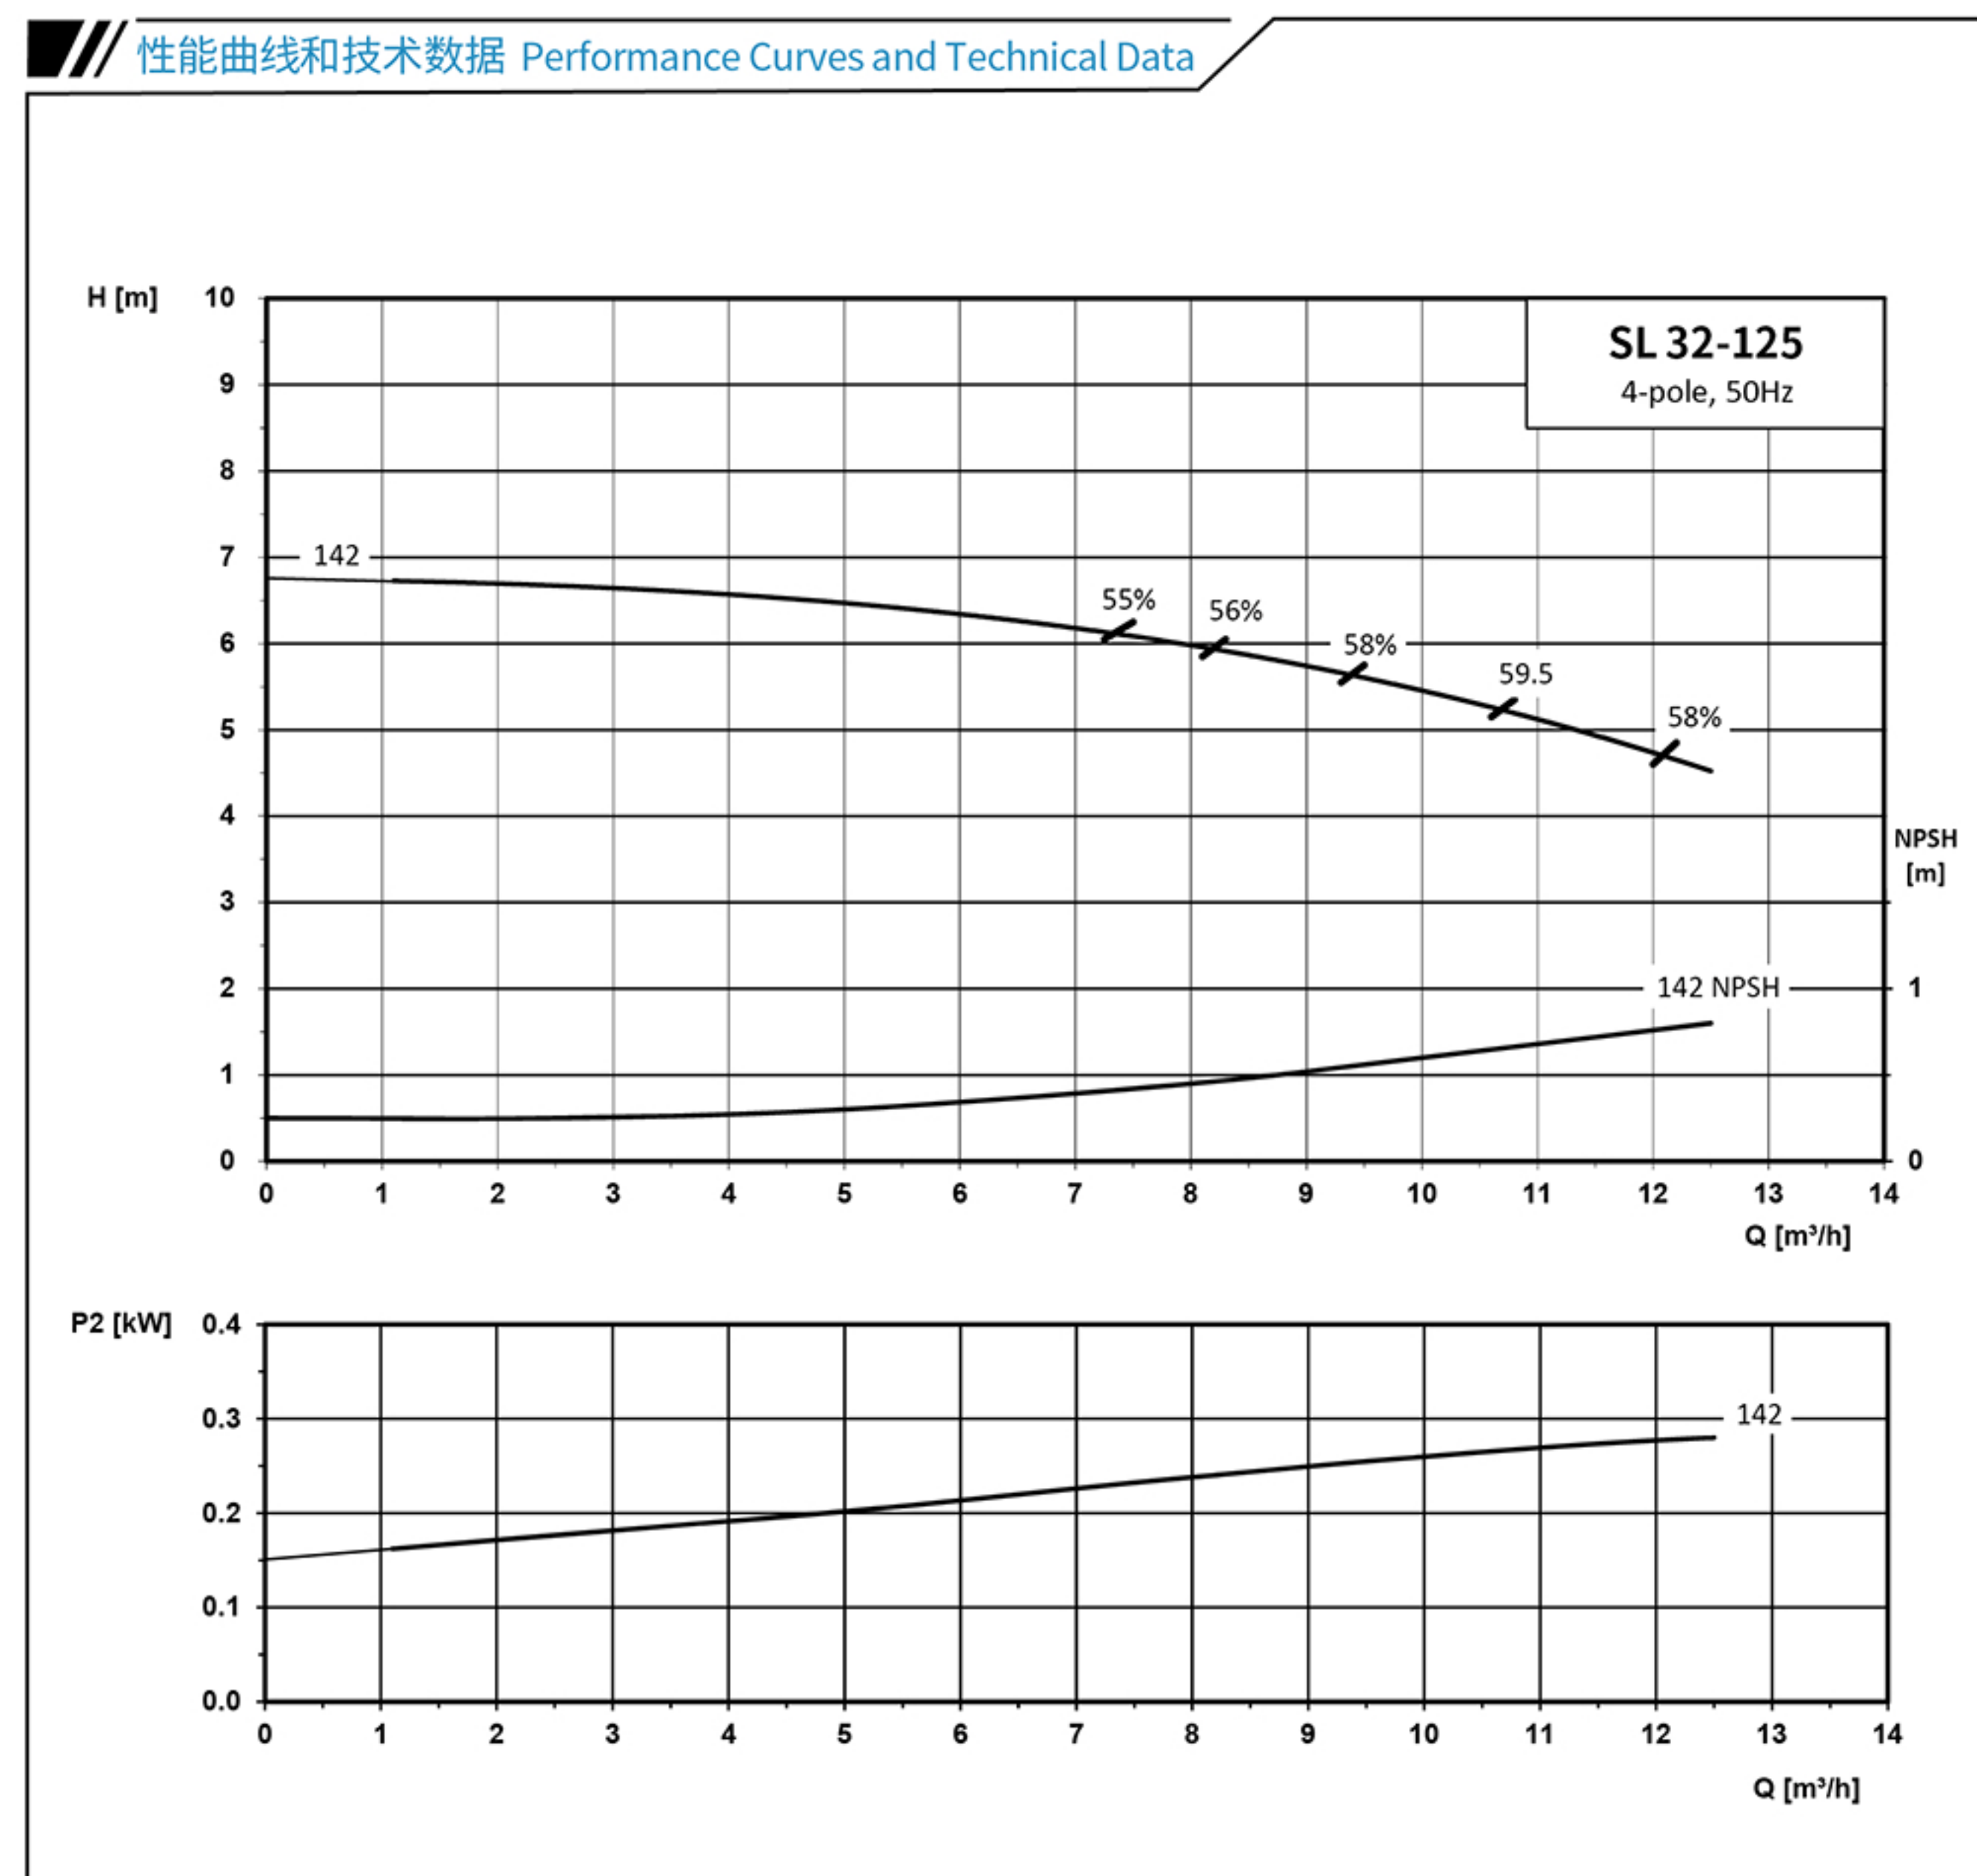

泵型号	Pump Model	SL32-125-0.55-4
电机型号	Motor Model	YE3-80M1-4
电机功率(kW)	Motor Power(kW)	0.55
叶轮直径(mm)	Impeller Diameter(mm)	142


SL 40-125

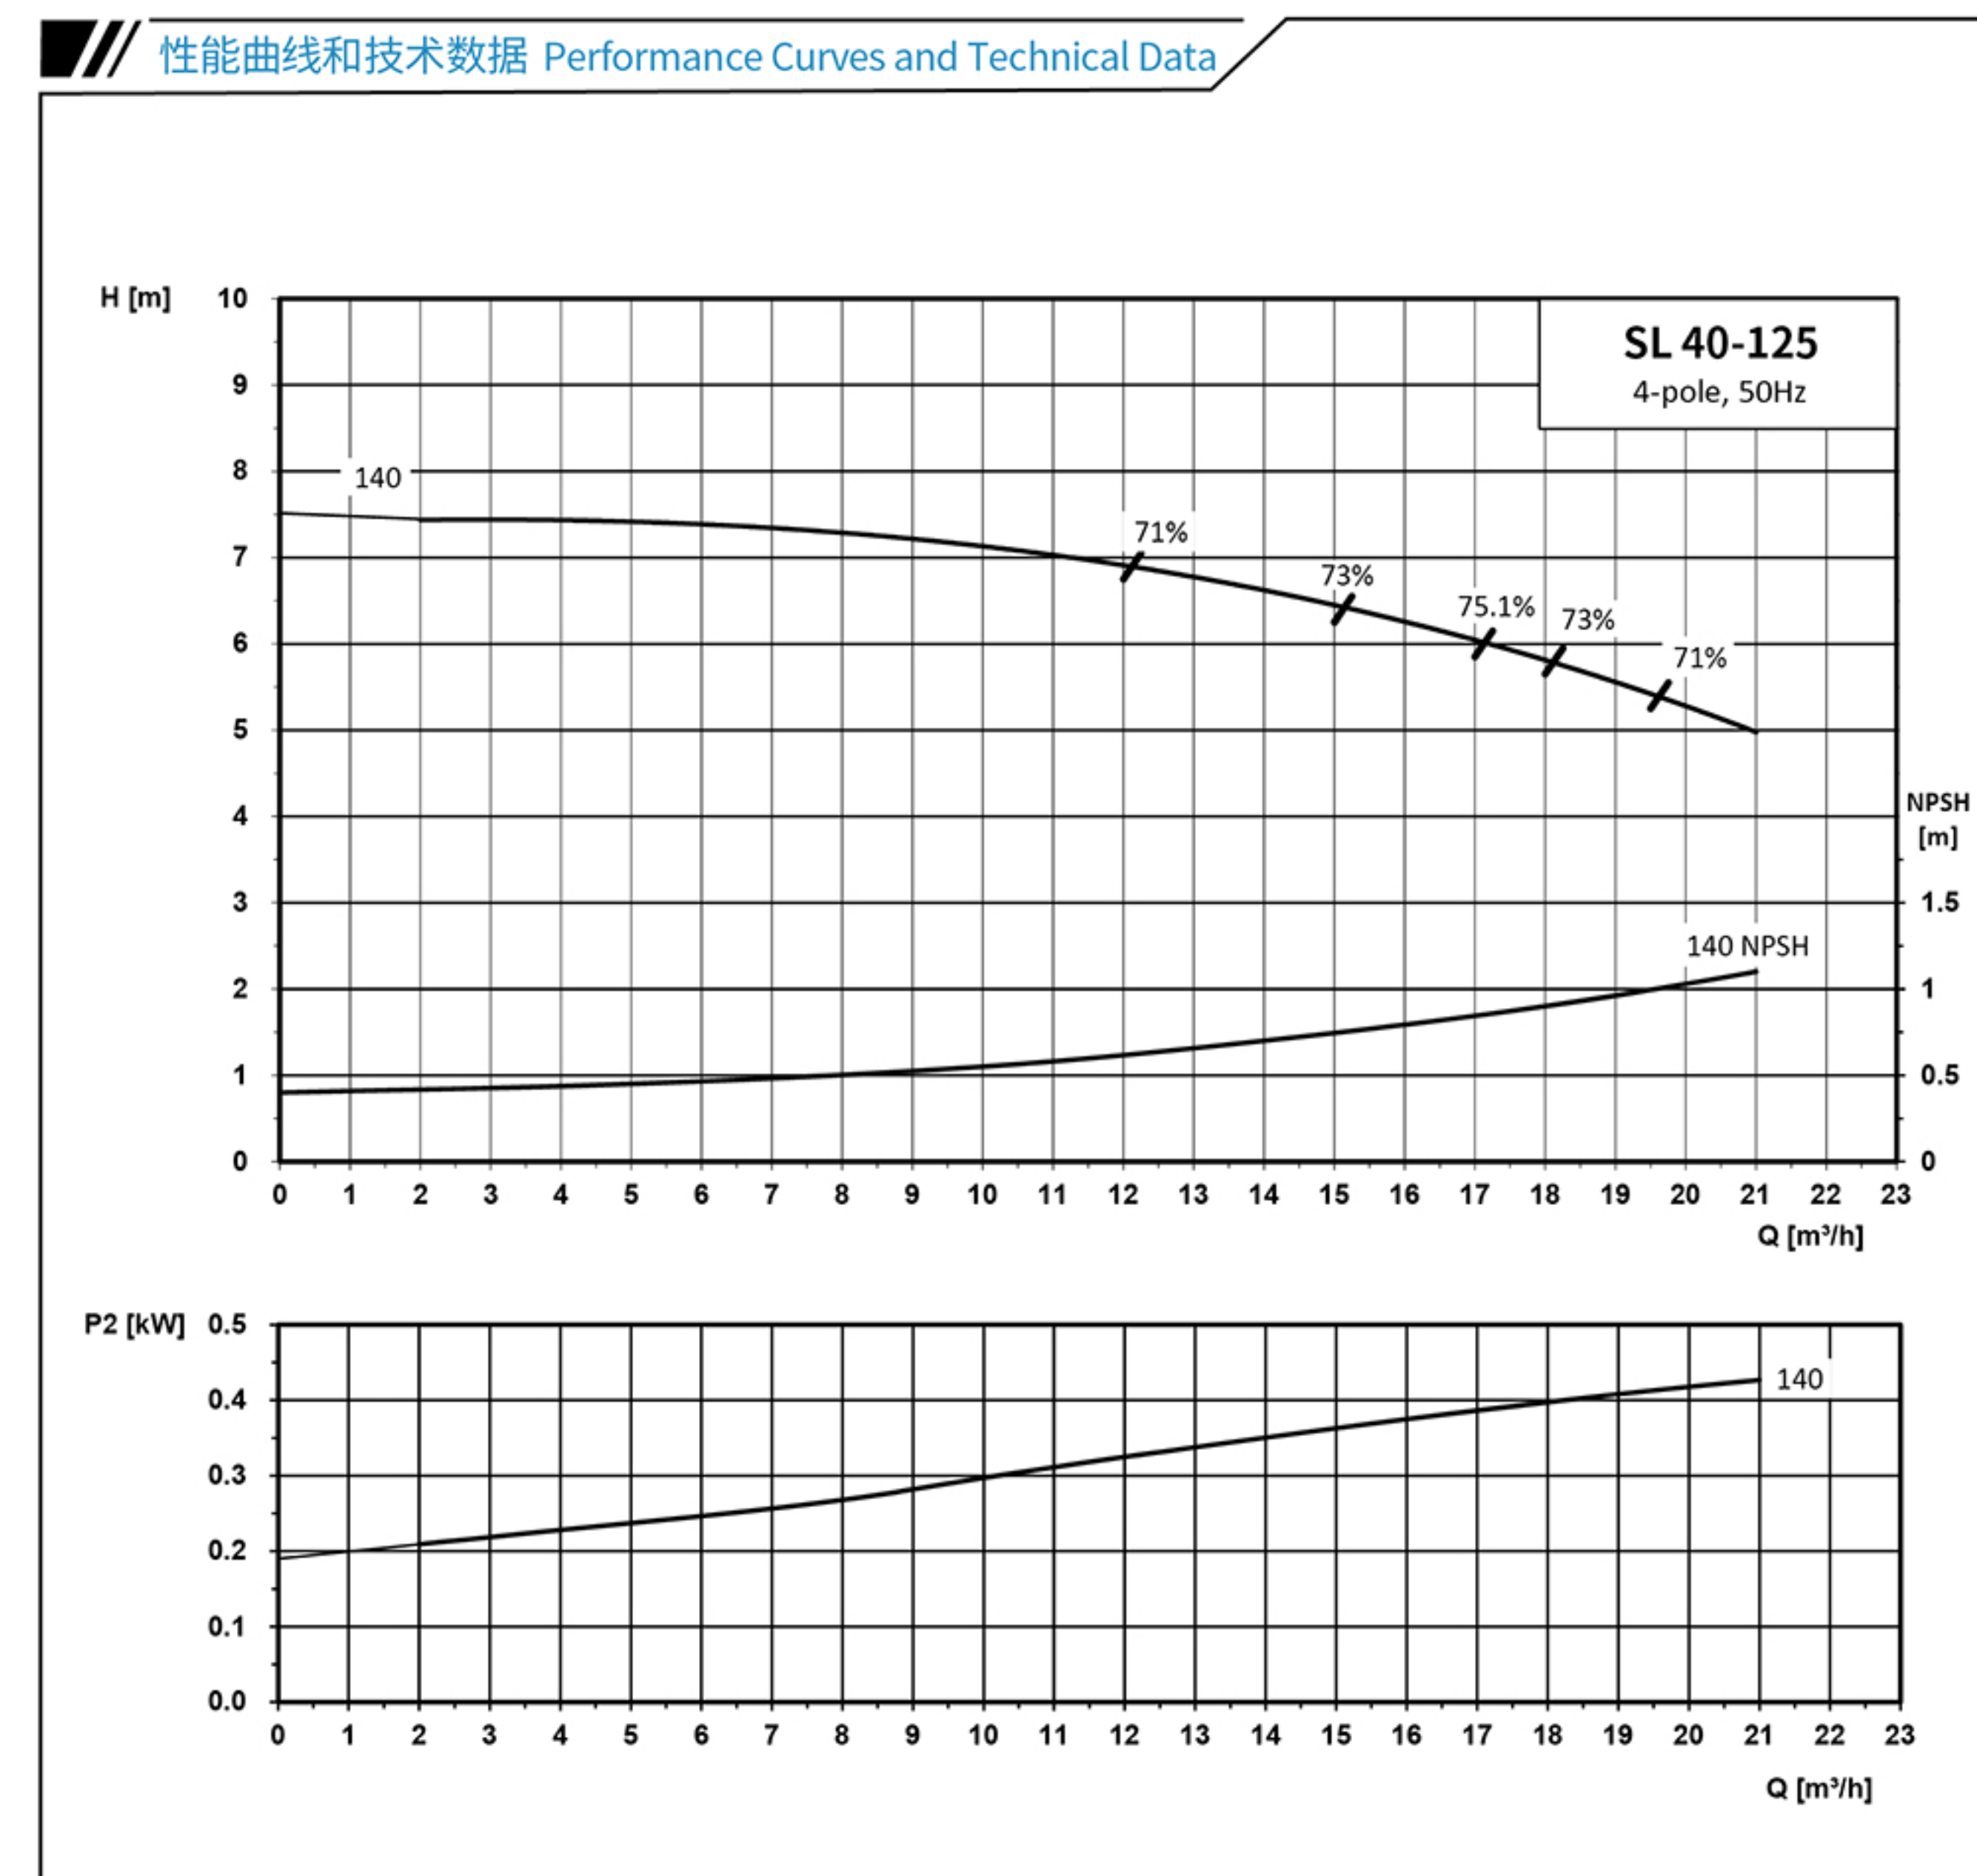

泵型号	Pump Model	SL40-125-0.55-4
电机型号	Motor Model	YE3-80M1-4
电机功率(kW)	Motor Power(kW)	0.55
叶轮直径(mm)	Impeller Diameter(mm)	140

SL 50-125


性能曲线和技术数据 Performance Curves and Technical Data

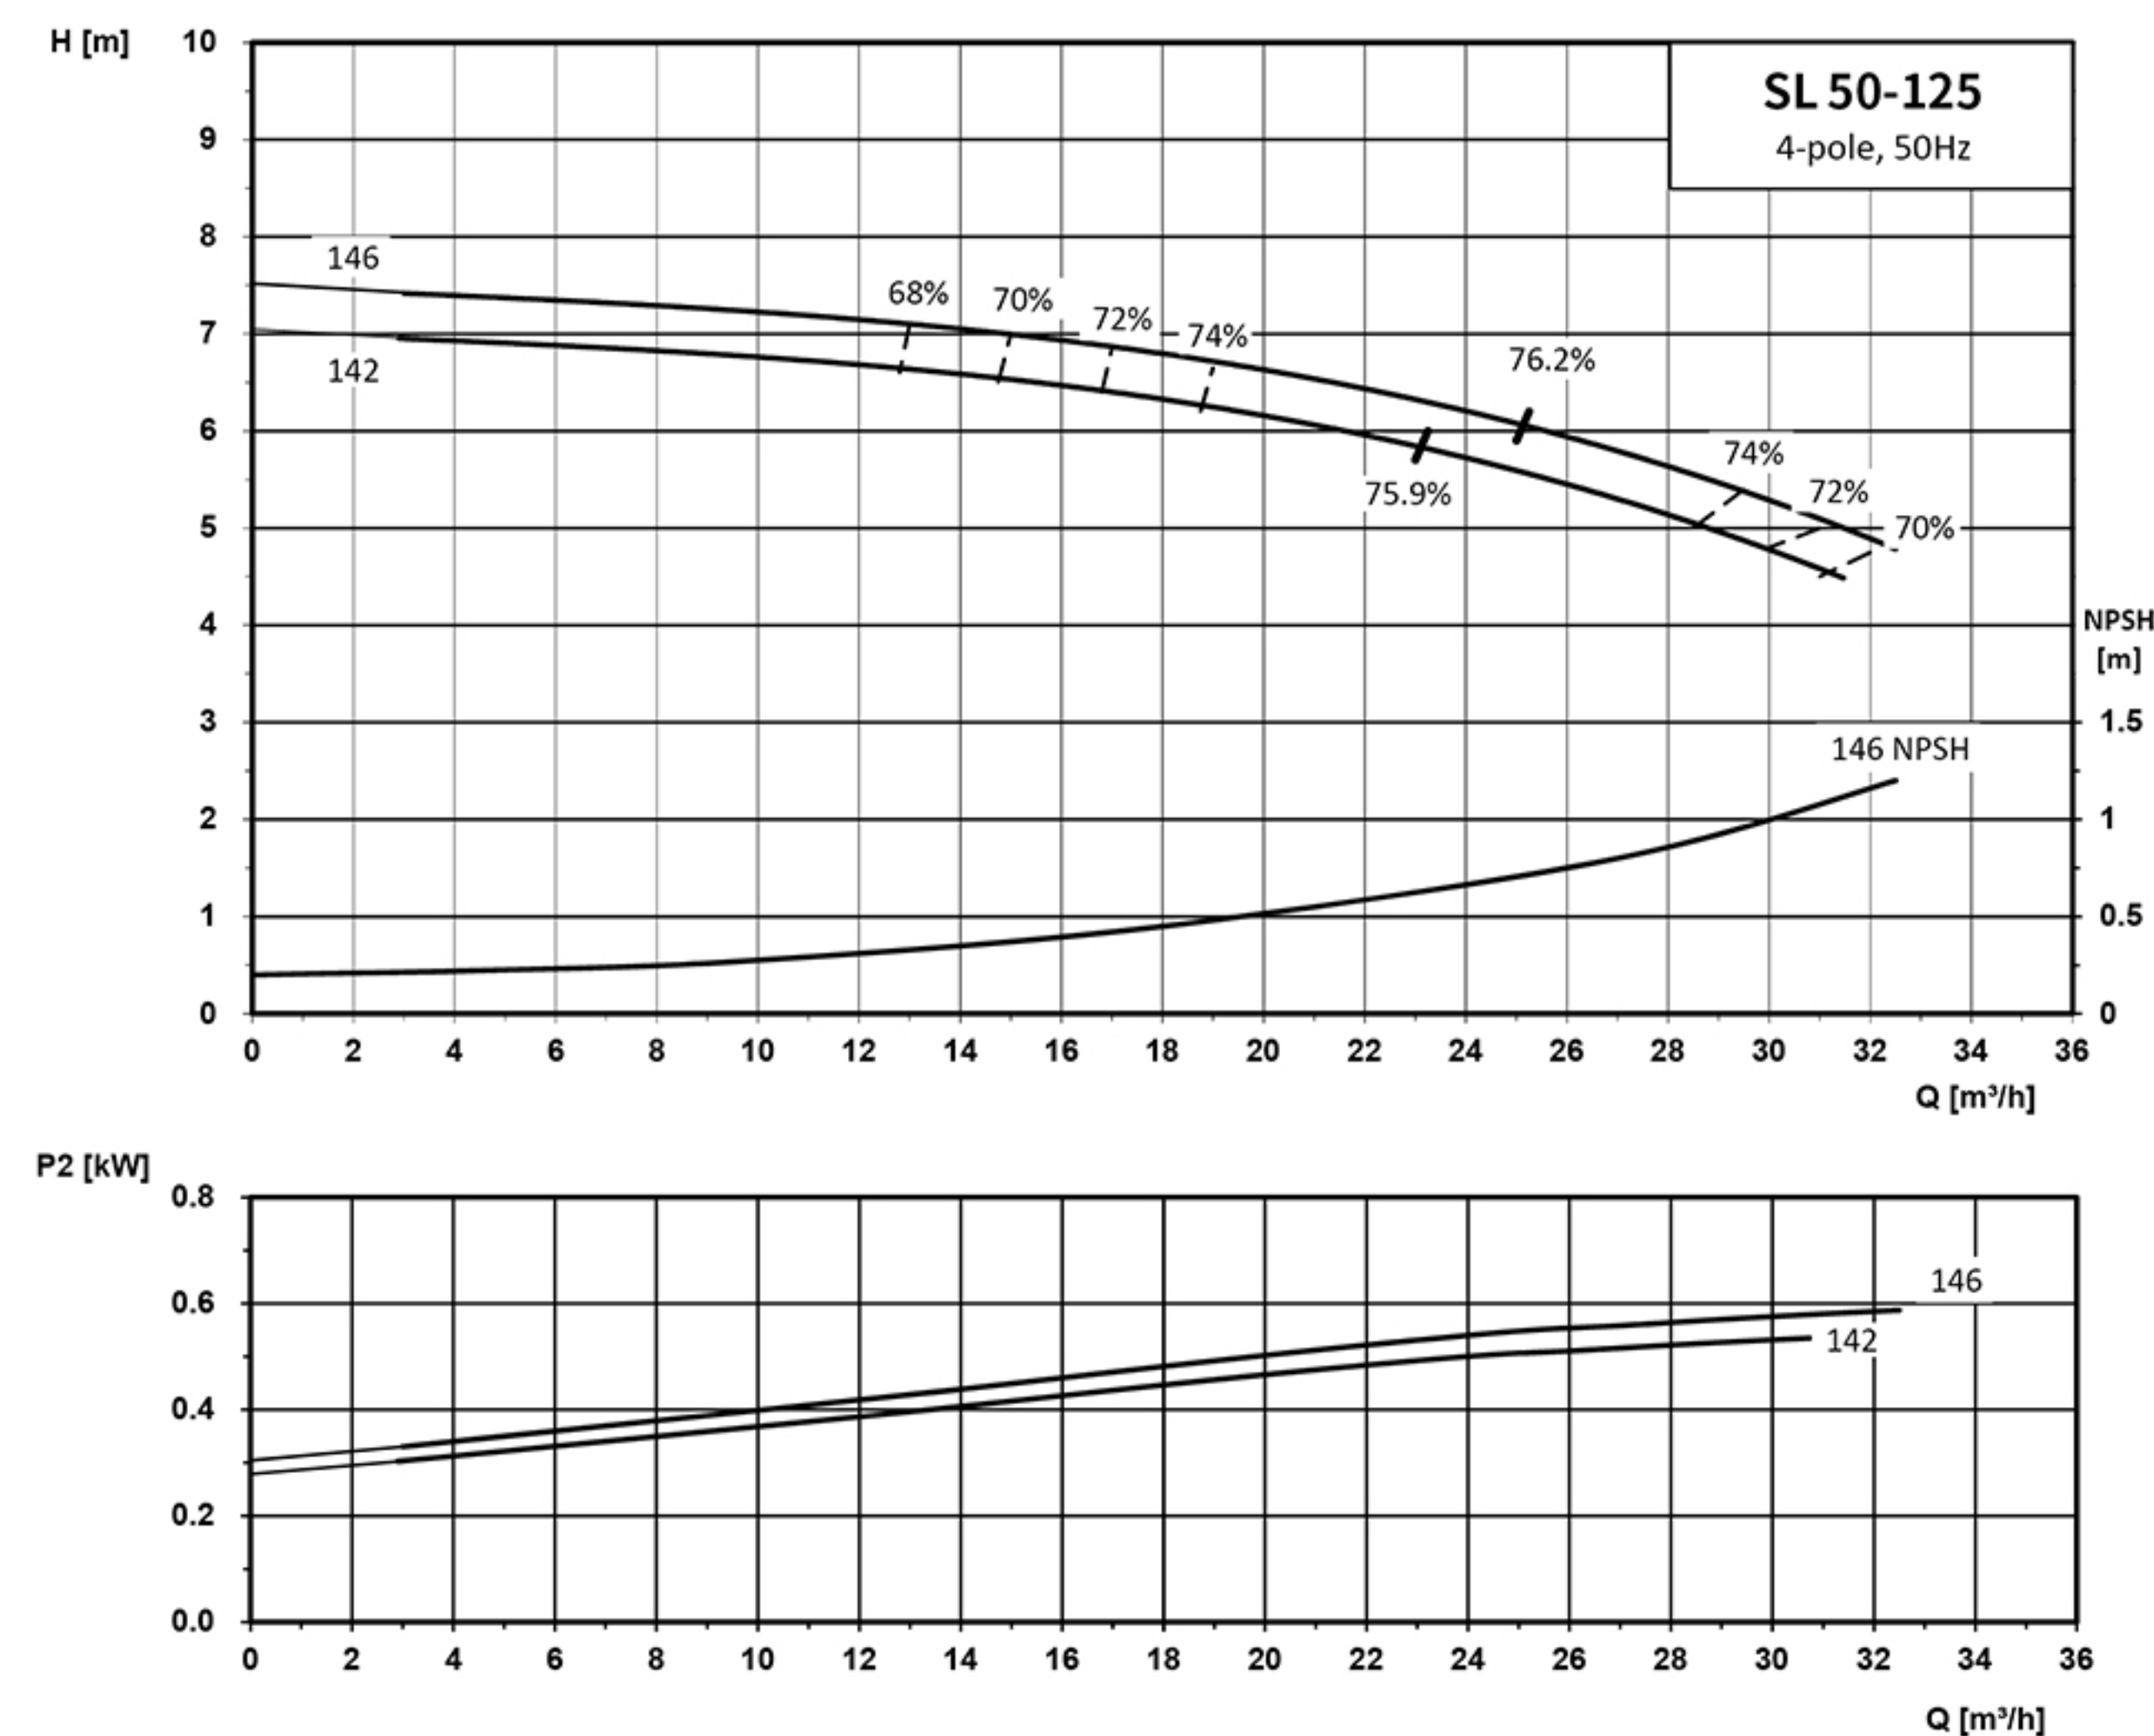

泵型号	Pump Model	SL50-125-0.55-4	SL50-125-0.75-4
电机型号	Motor Model	YE3-80M1-4	YE3-80M2-4
电机功率(kW)	Motor Power(kW)	0.55	0.75
叶轮直径(mm)	Impeller Diameter(mm)	142	146

SL 65-125


性能曲线和技术数据 Performance Curves and Technical Data

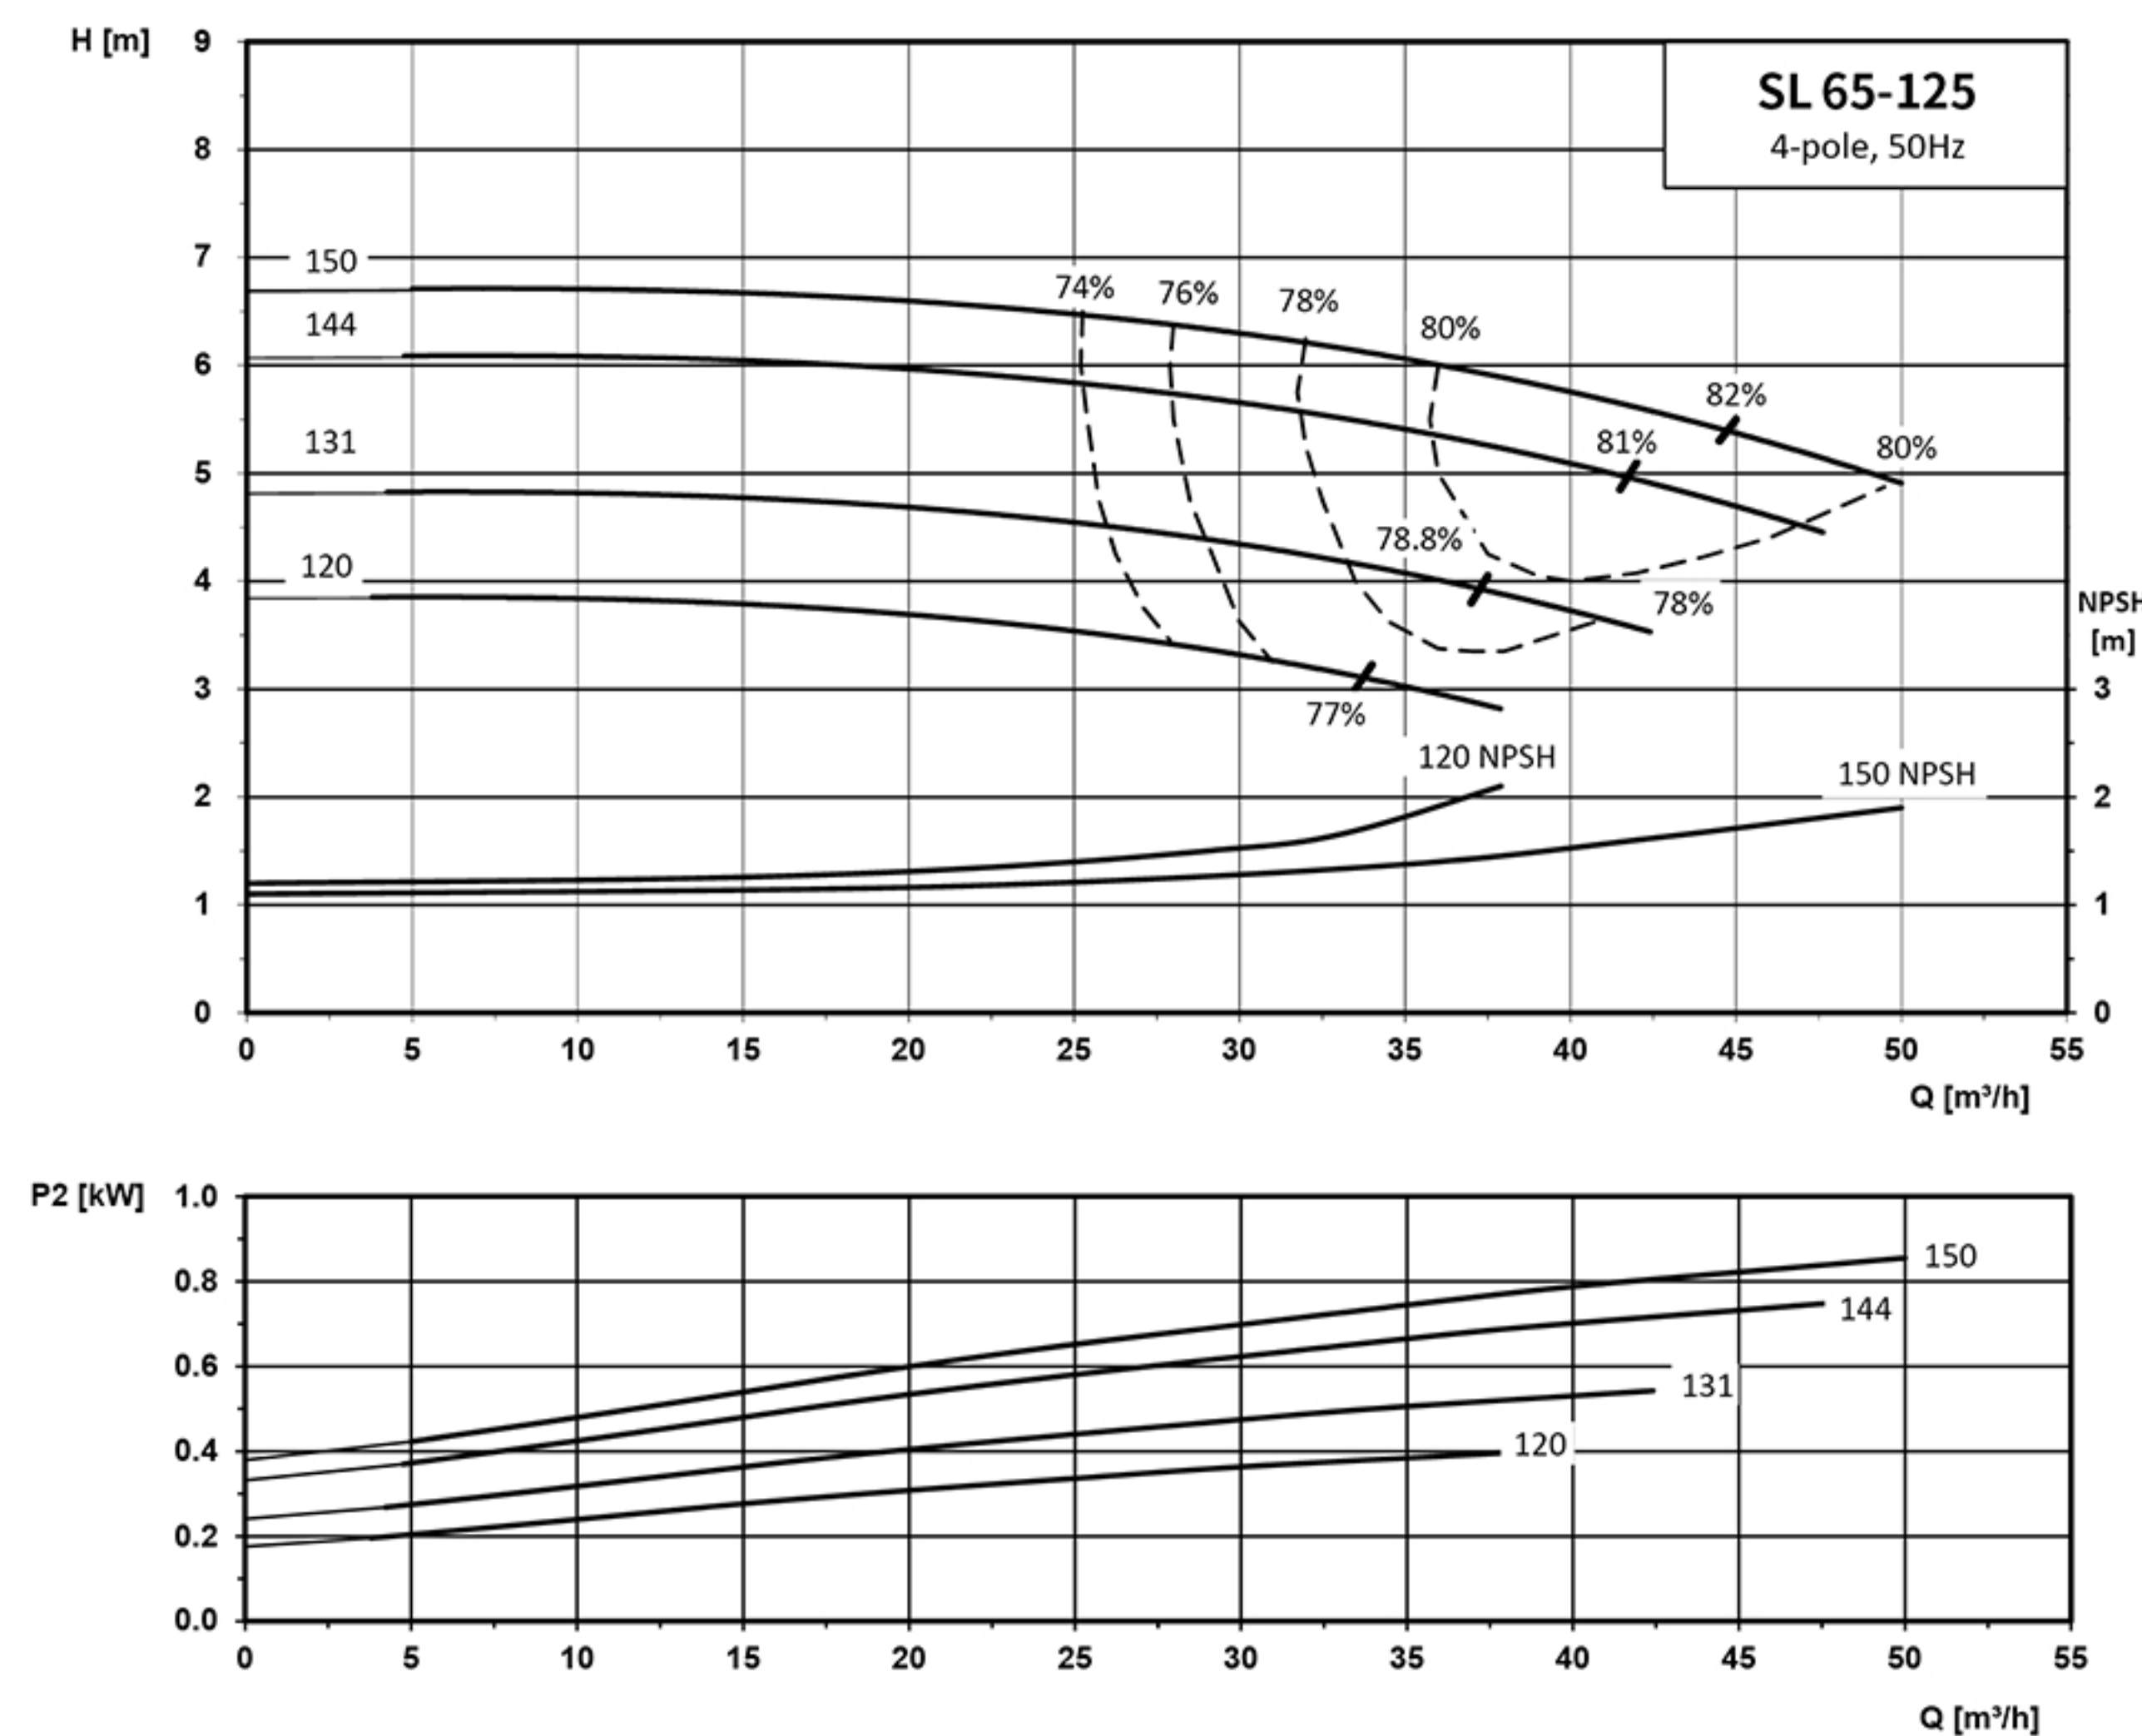

泵型号	Pump Model	SL65-125-0.55-4	SL65-125-0.55-4	SL65-125-0.75-4	SL65-125-1.1-4
电机型号	Motor Model	YE3-80M1-4	YE3-80M1-4	YE3-80M2-4	YE3-90S-4
电机功率(kW)	Motor Power(kW)	0.55	0.55	0.75	1.1
叶轮直径(mm)	Impeller Diameter(mm)	120	131	144	150

SL 80-125


性能曲线和技术数据 Performance Curves and Technical Data

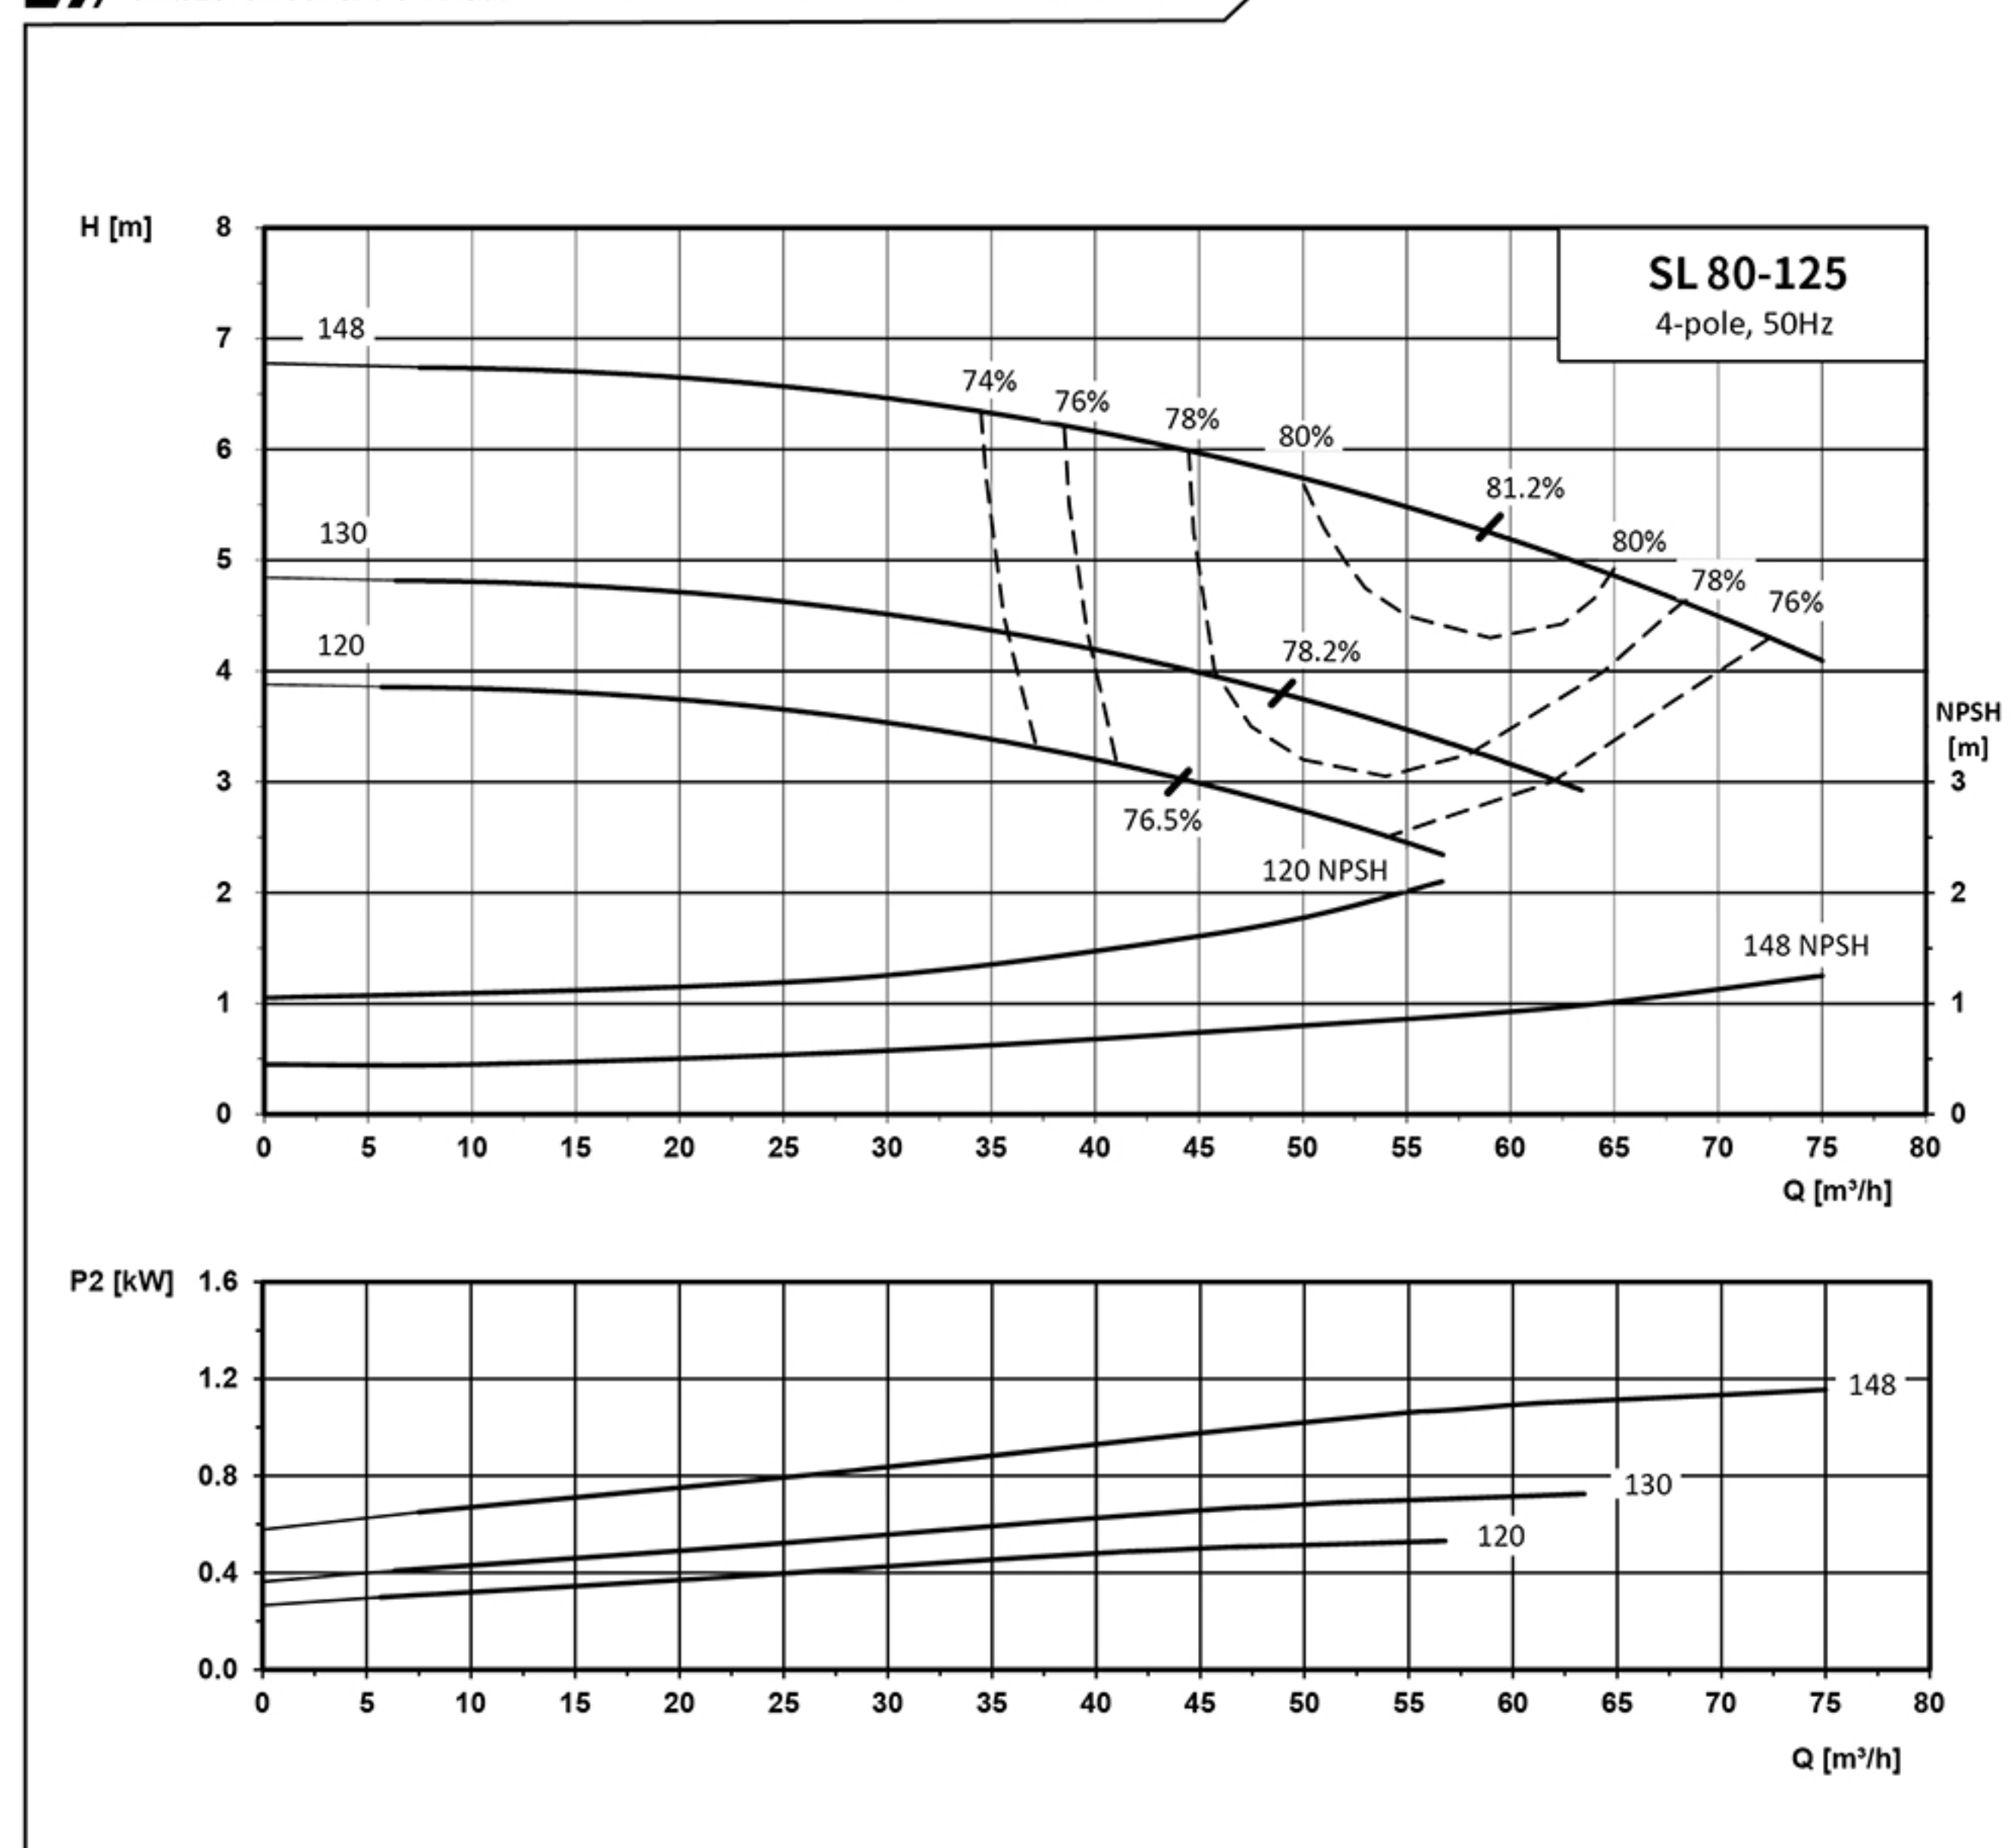

泵型号	Pump Model	SL80-125-0.55-4	SL80-125-0.75-4	SL80-125-1.1-4
电机型号	Motor Model	YE3-80M1-4	YE3-80M2-4	YE3-90S-4
电机功率(kW)	Motor Power(kW)	0.55	0.75	1.1
叶轮直径(mm)	Impeller Diameter(mm)	120	130	148


SL 32-160

性能曲线和技术数据 Performance Curves and Technical Data

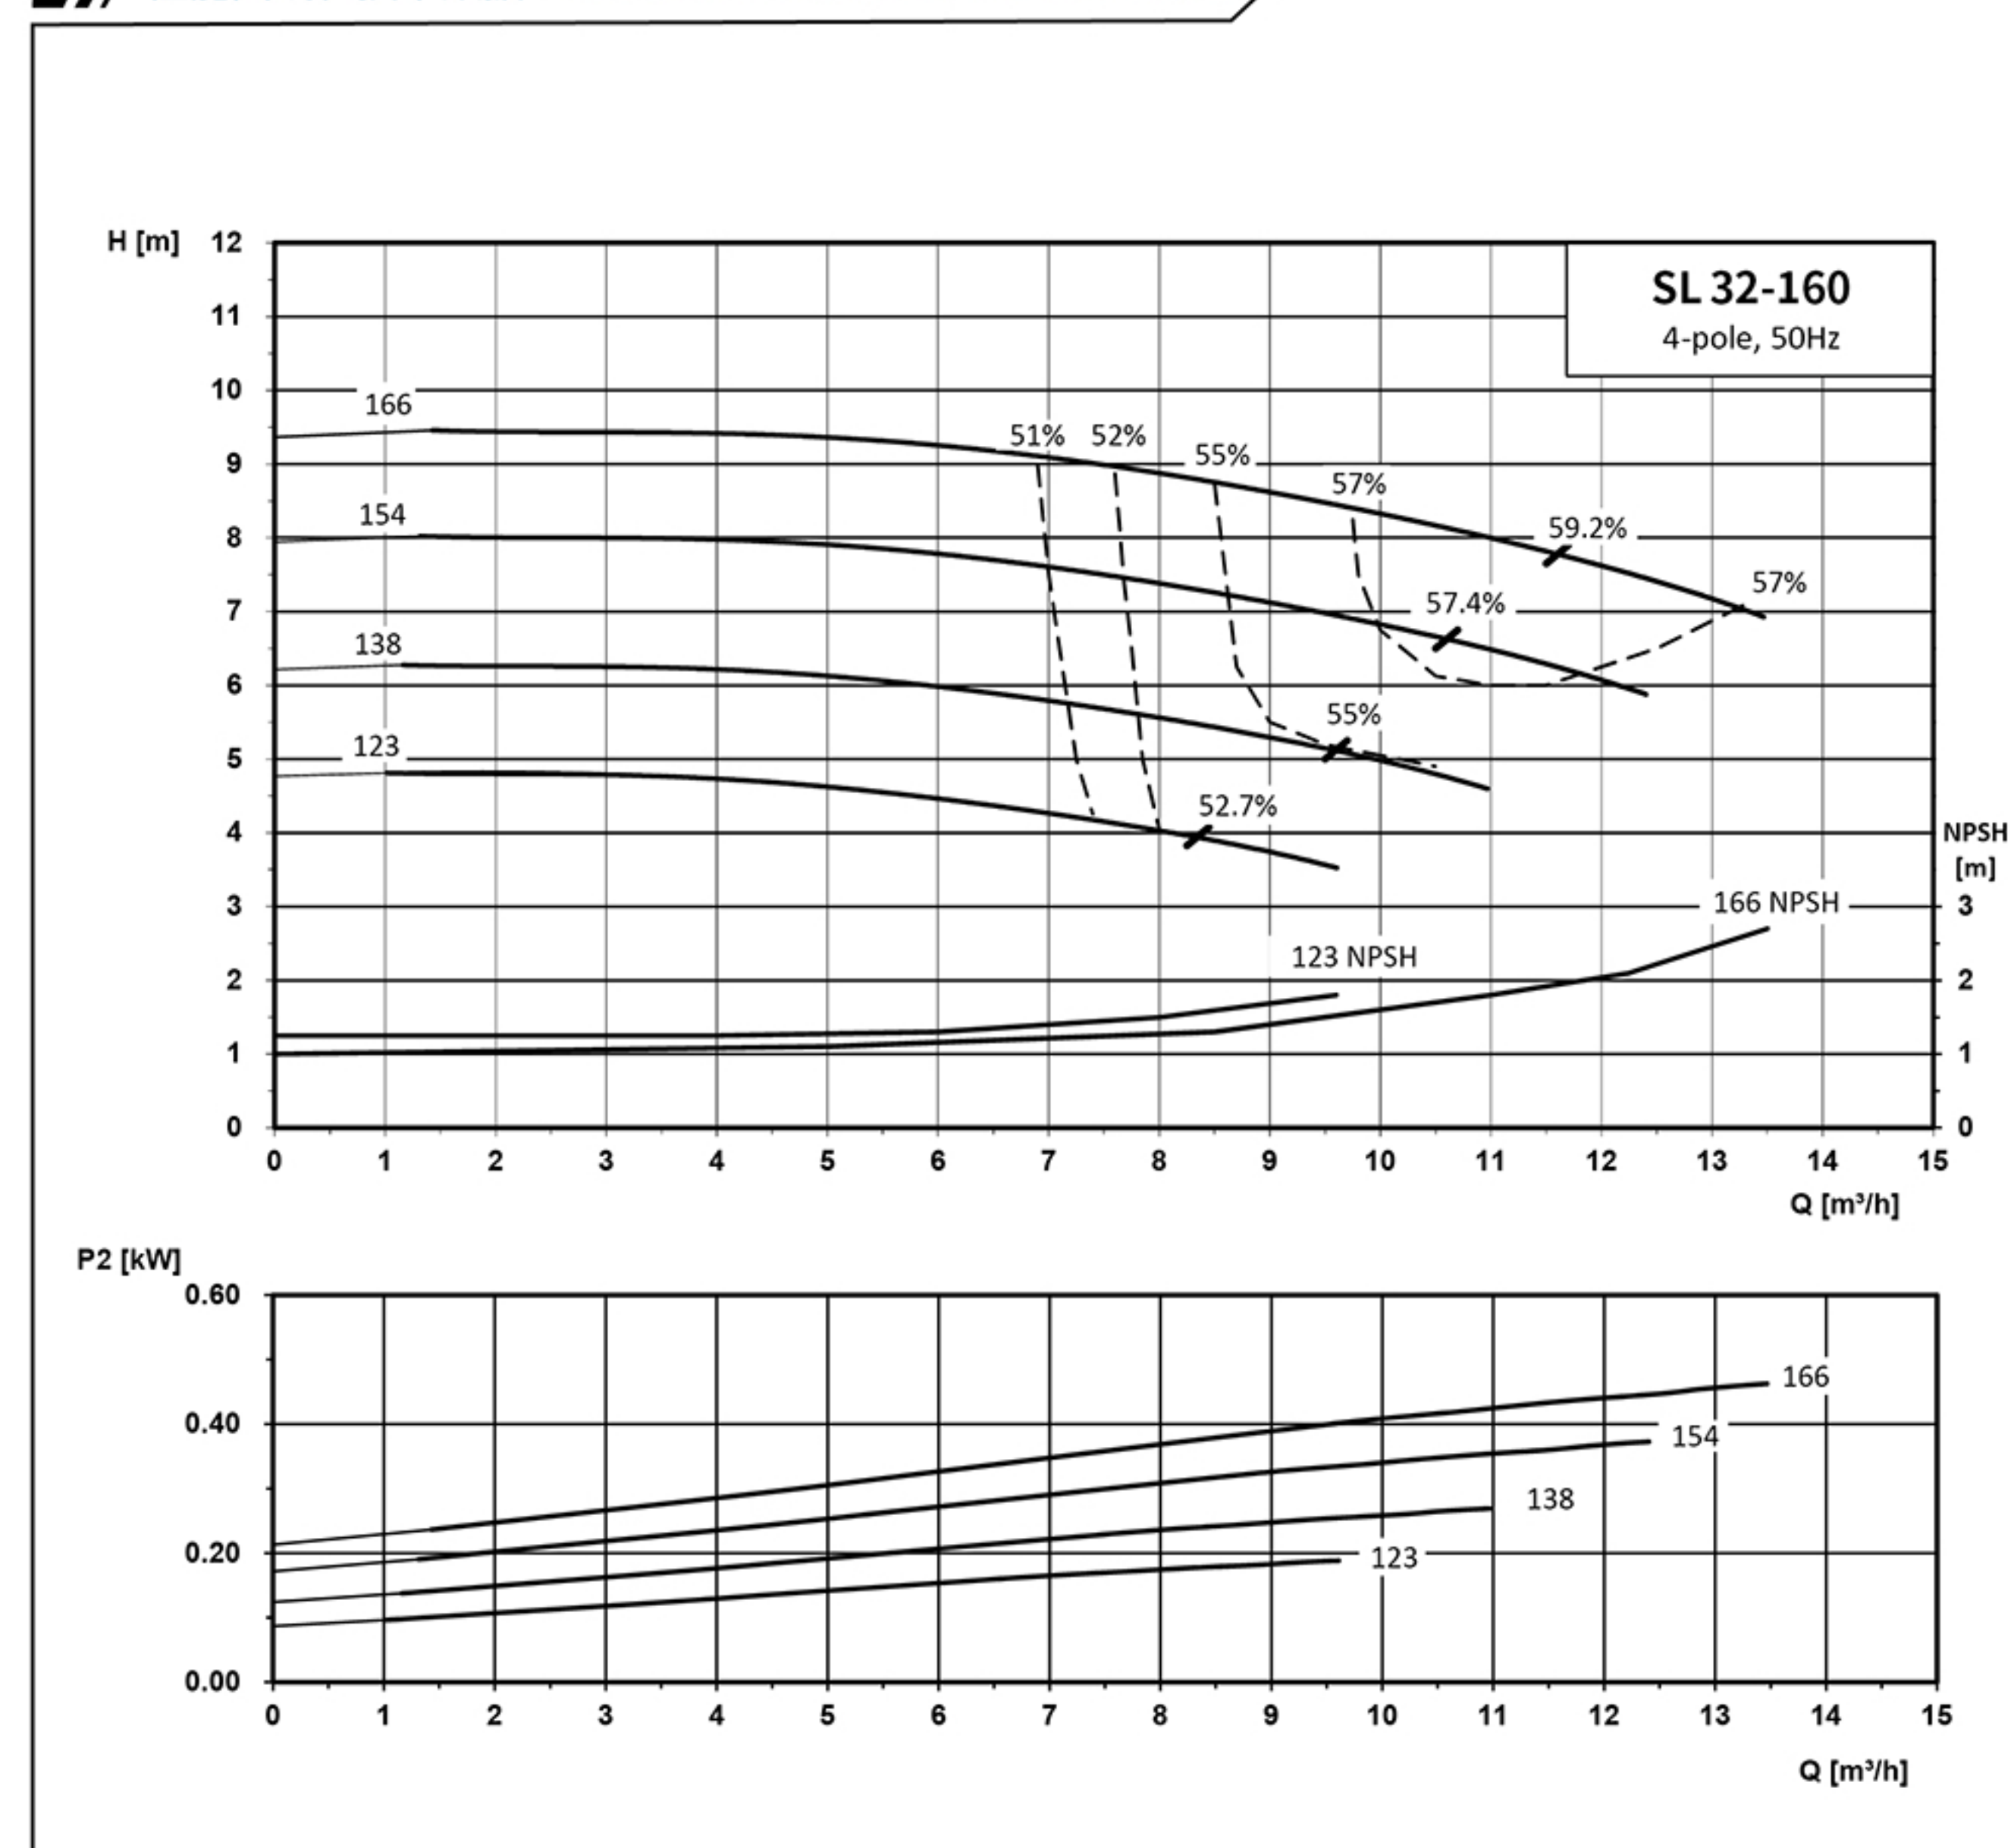


泵型号	Pump Model	SL32-160-0.55-4	SL32-160-0.55-4	SL32-160-0.55-4	SL32-160-0.55-4
电机型号	Motor Model	YE3-80M1-4	YE3-80M1-4	YE3-80M1-4	YE3-80M1-4
电机功率(kW)	Motor Power(kW)	0.55	0.55	0.55	0.55
叶轮直径(mm)	Impeller Diameter(mm)	123	138	154	166

SL 40-160

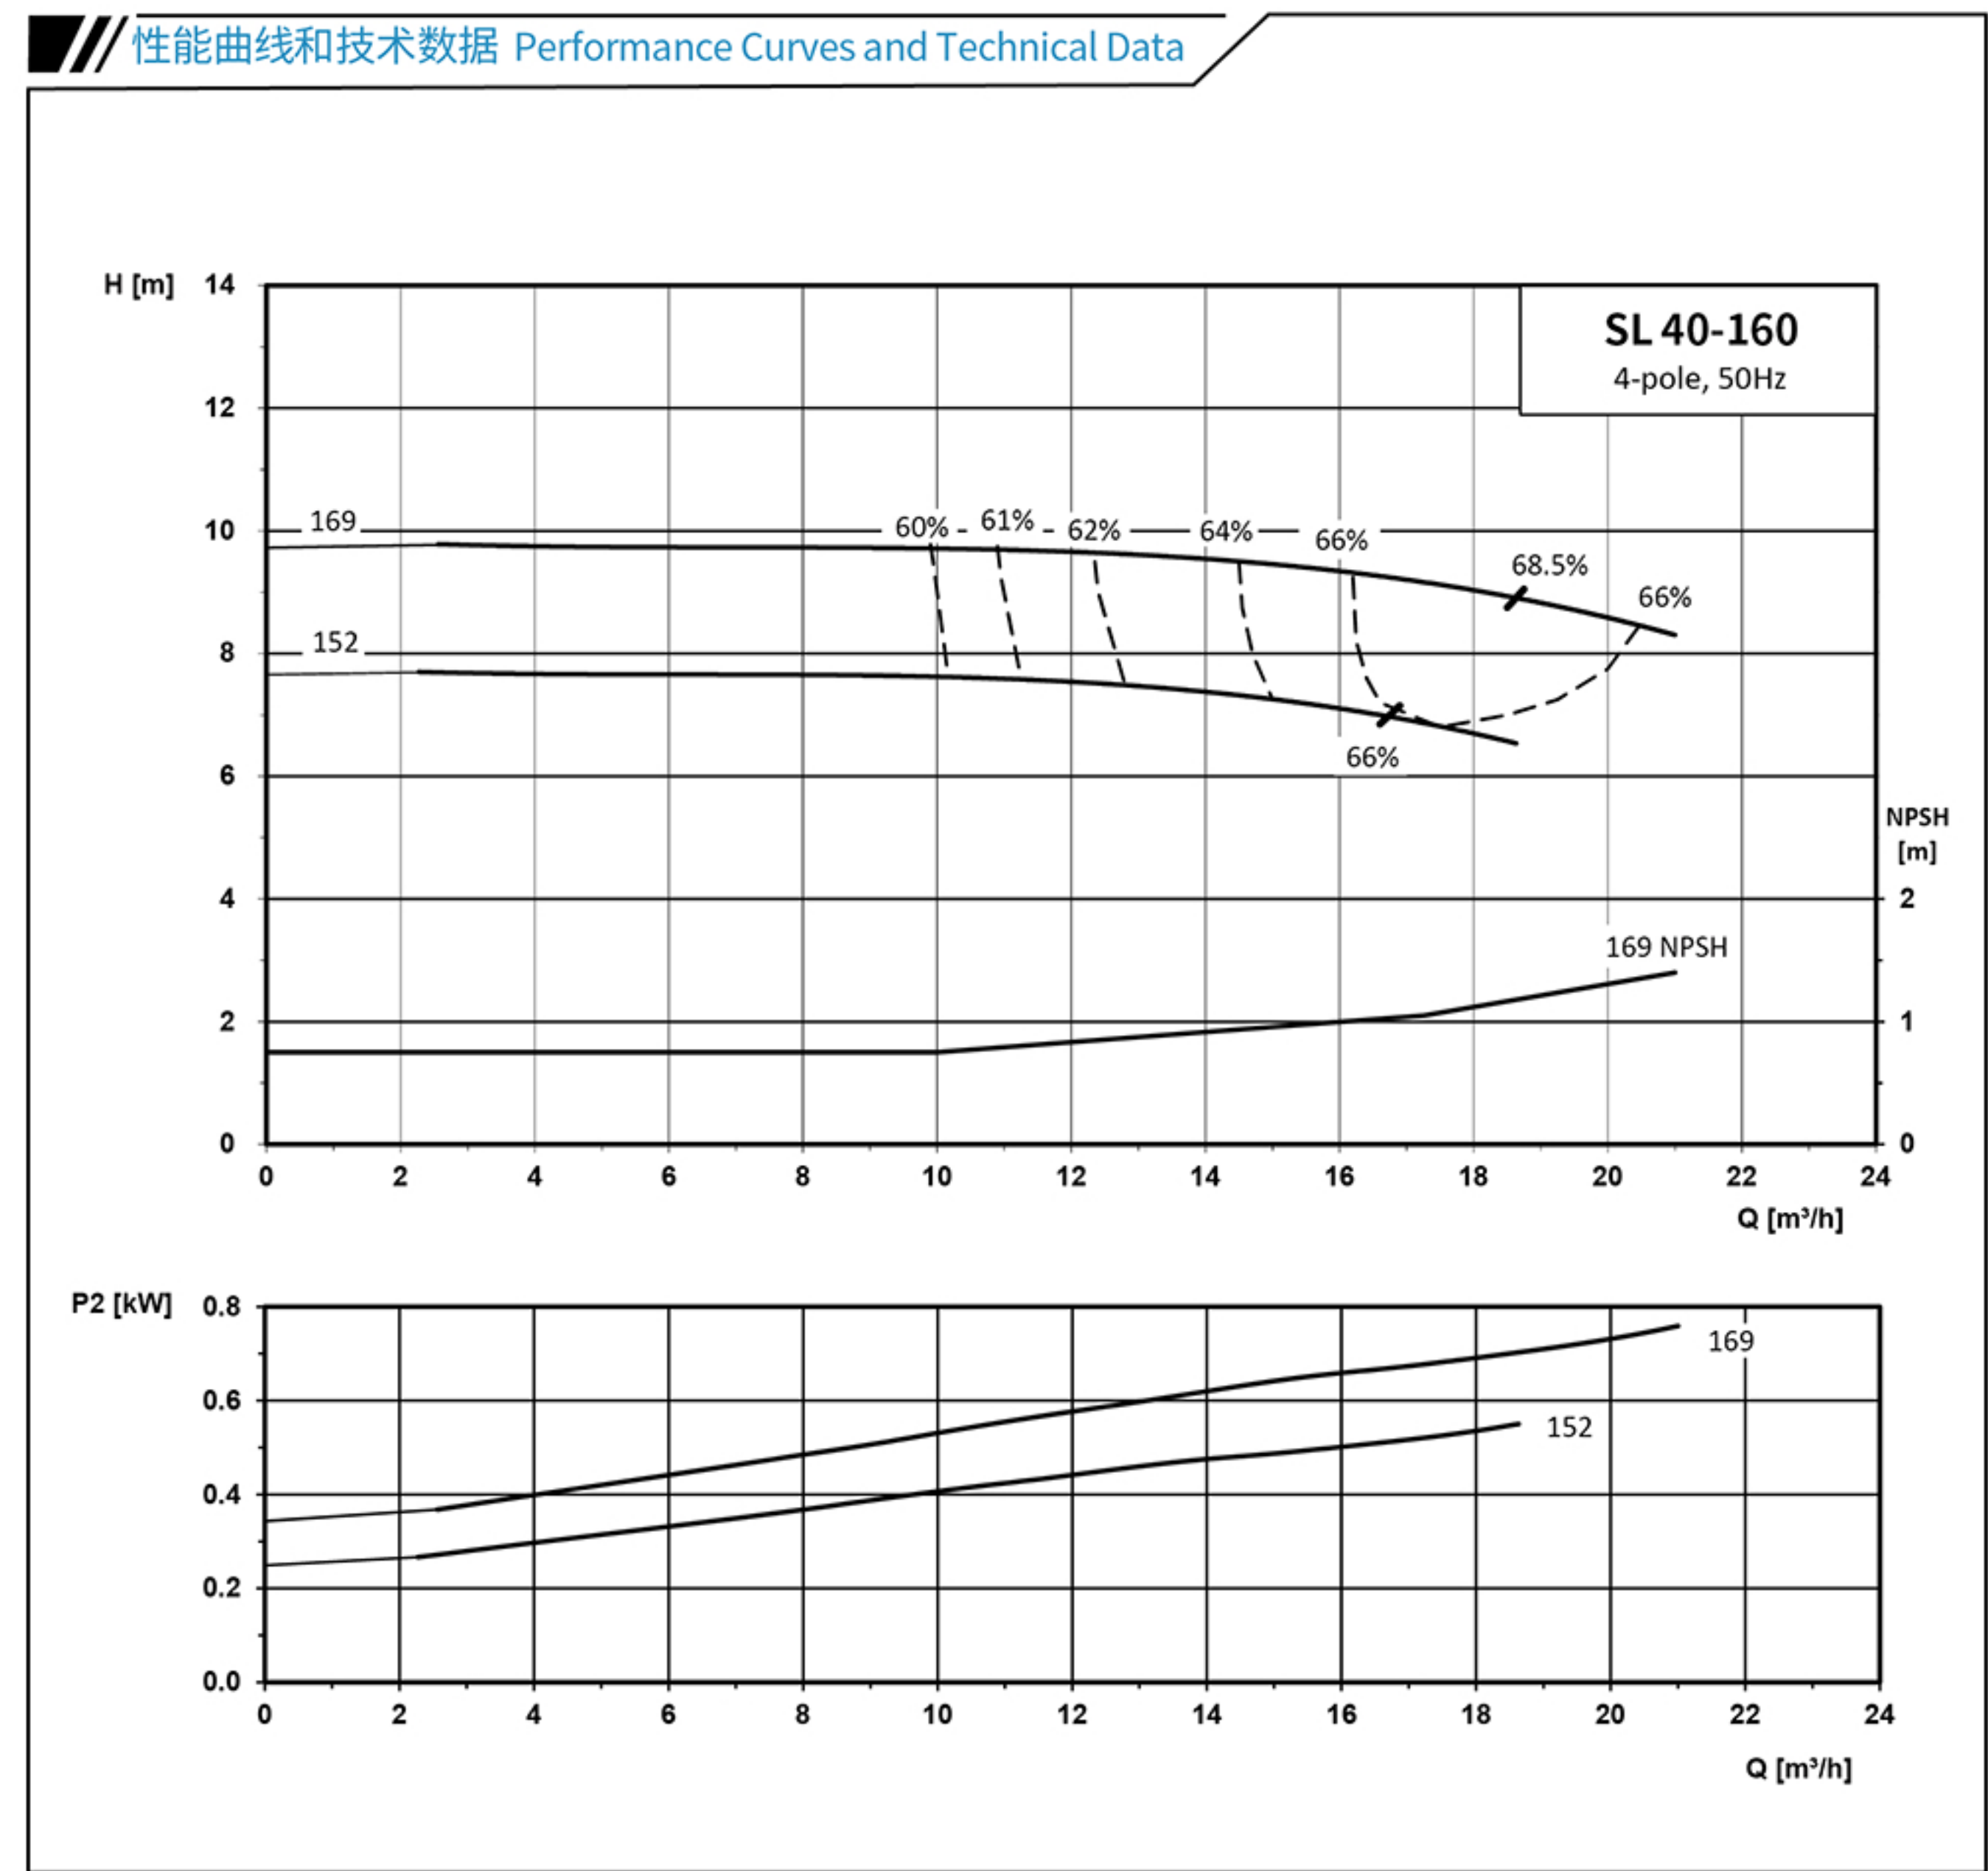

泵型号	Pump Model	SL40-160-0.55-4	SL40-160-0.75-4
电机型号	Motor Model	YE3-80M1-4	YE3-80M2-4
电机功率(kW)	Motor Power(kW)	0.55	0.75
叶轮直径(mm)	Impeller Diameter(mm)	152	169


SL 50-160

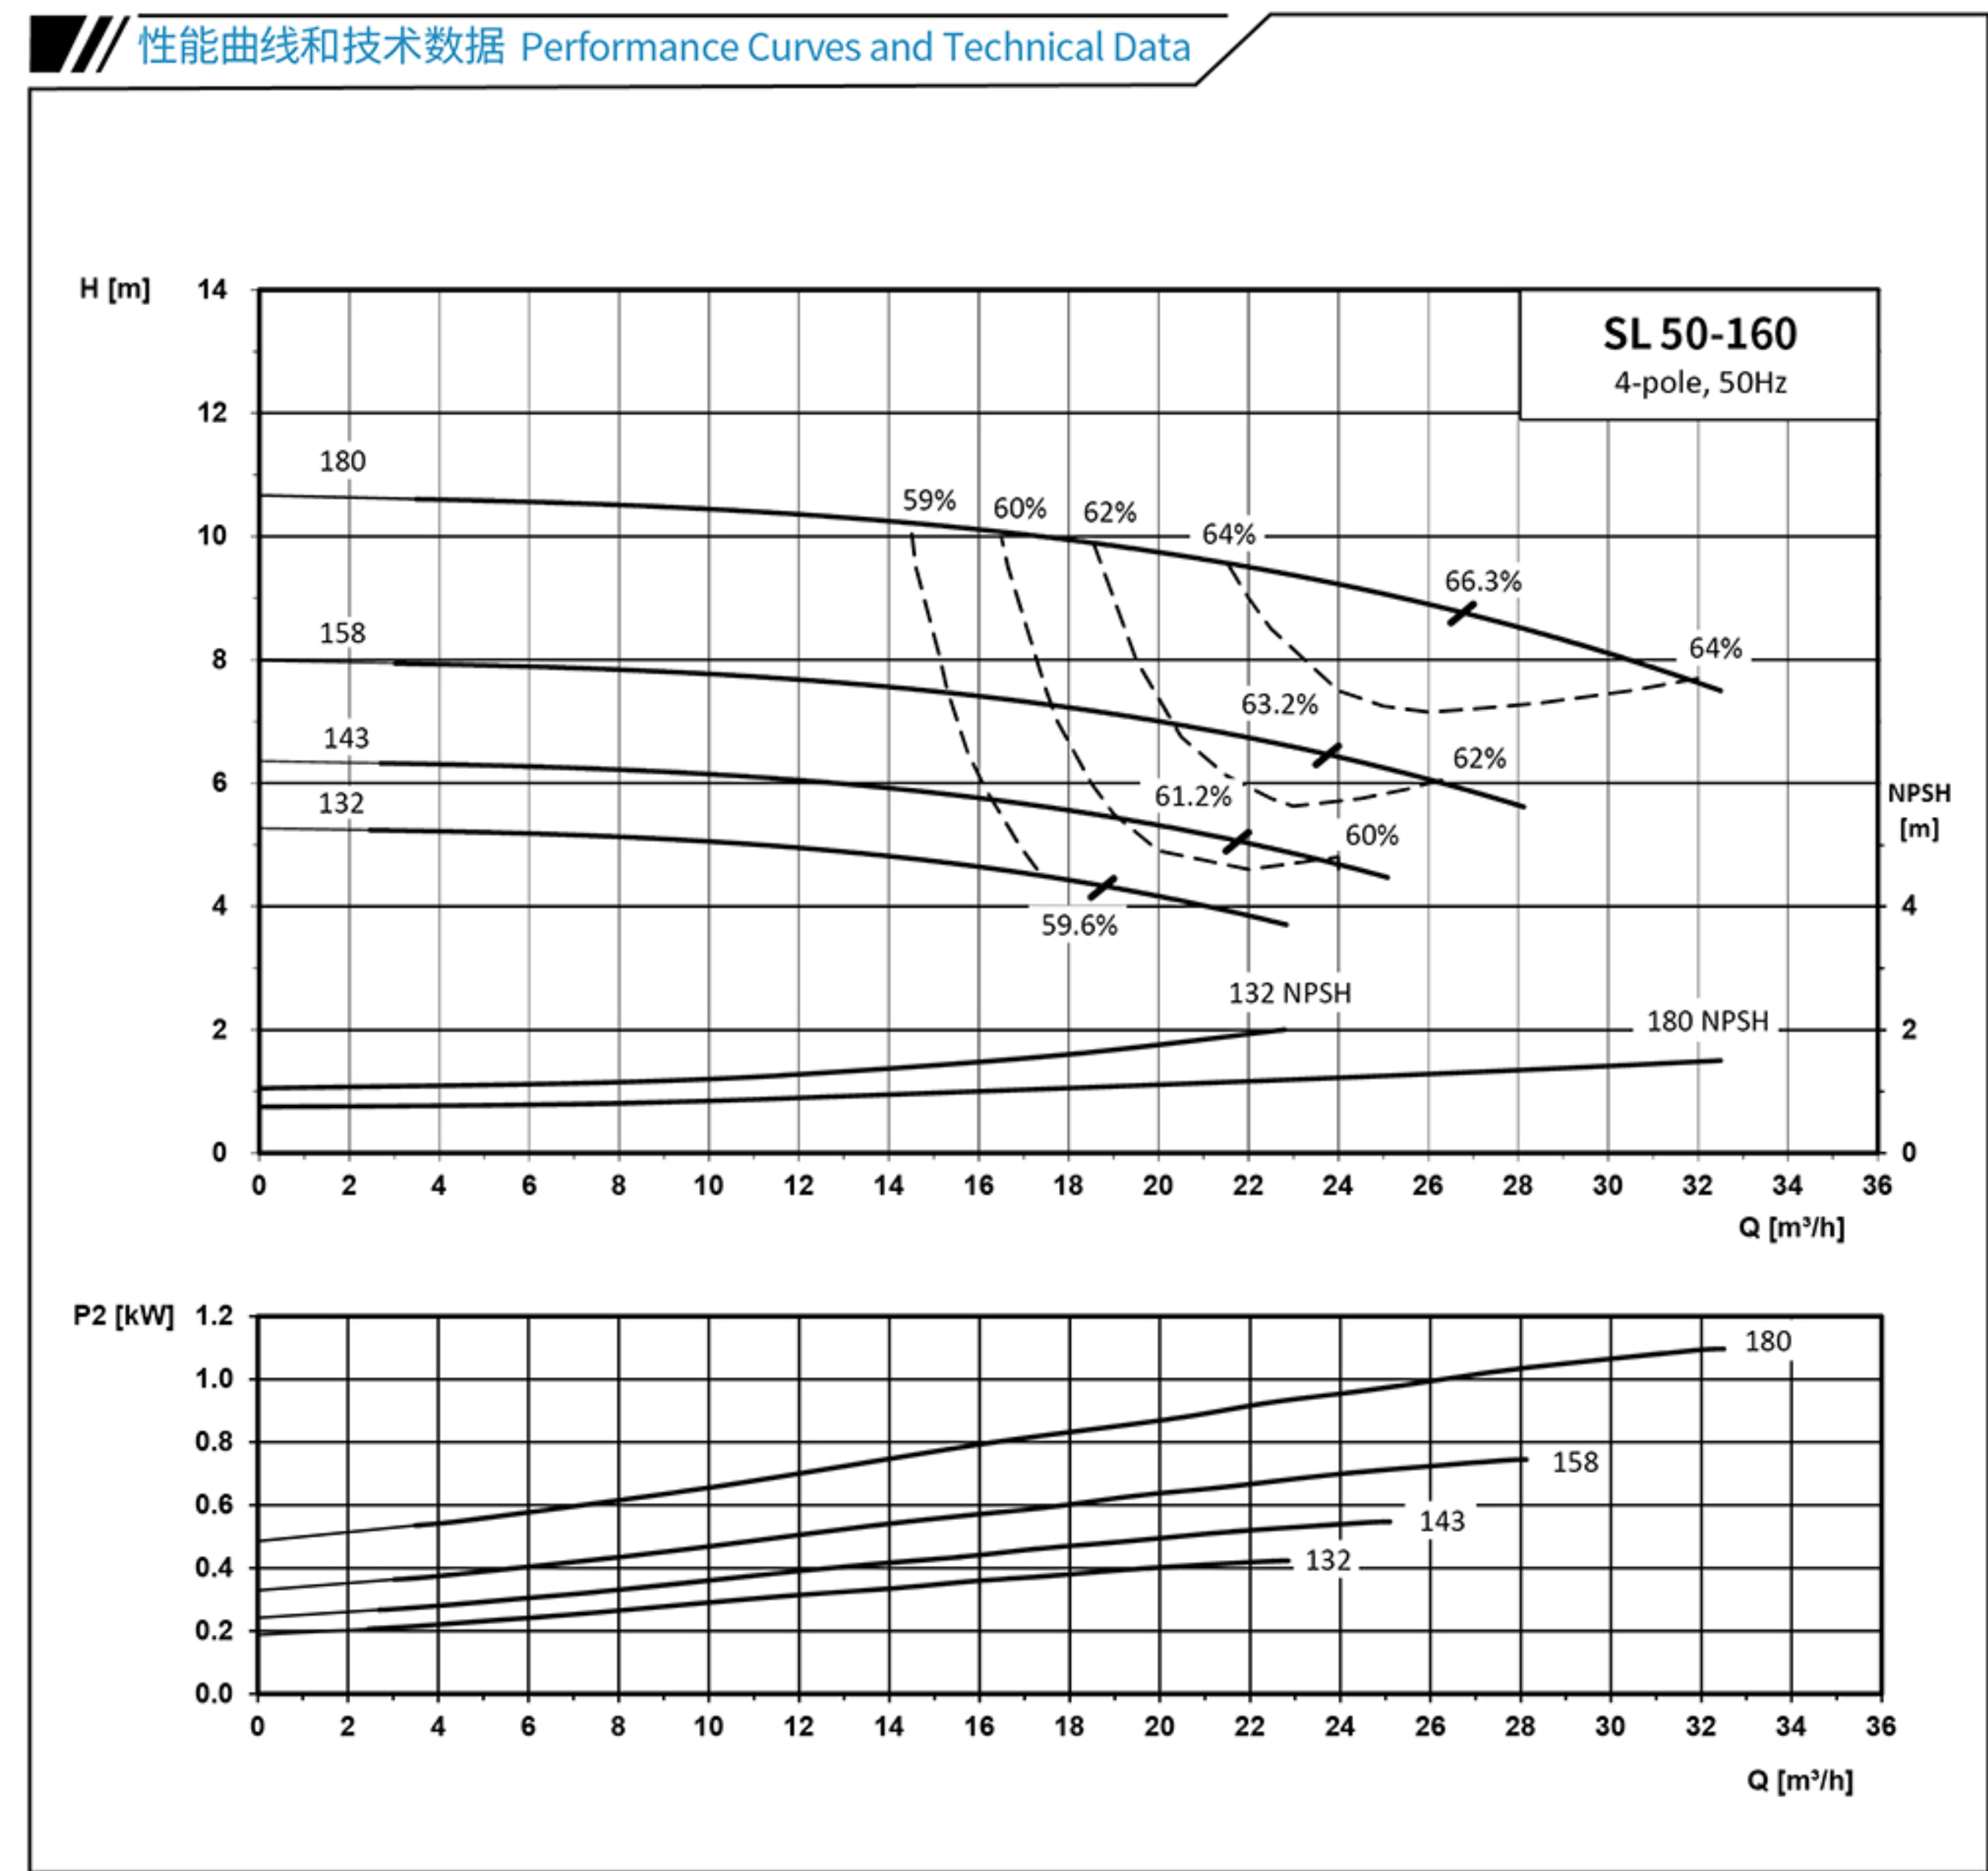

泵型号	Pump Model	SL50-160-0.55-4	SL50-160-0.55-4	SL50-160-0.75-4	SL50-160-1.1-4
电机型号	Motor Model	YE3-80M1-4	YE3-80M1-4	YE3-80M2-4	YE3-90S-4
电机功率(kW)	Motor Power(kW)	0.55	0.55	0.75	1.1
叶轮直径(mm)	Impeller Diameter(mm)	132	143	158	180

SL 65-160


性能曲线和技术数据 Performance Curves and Technical Data

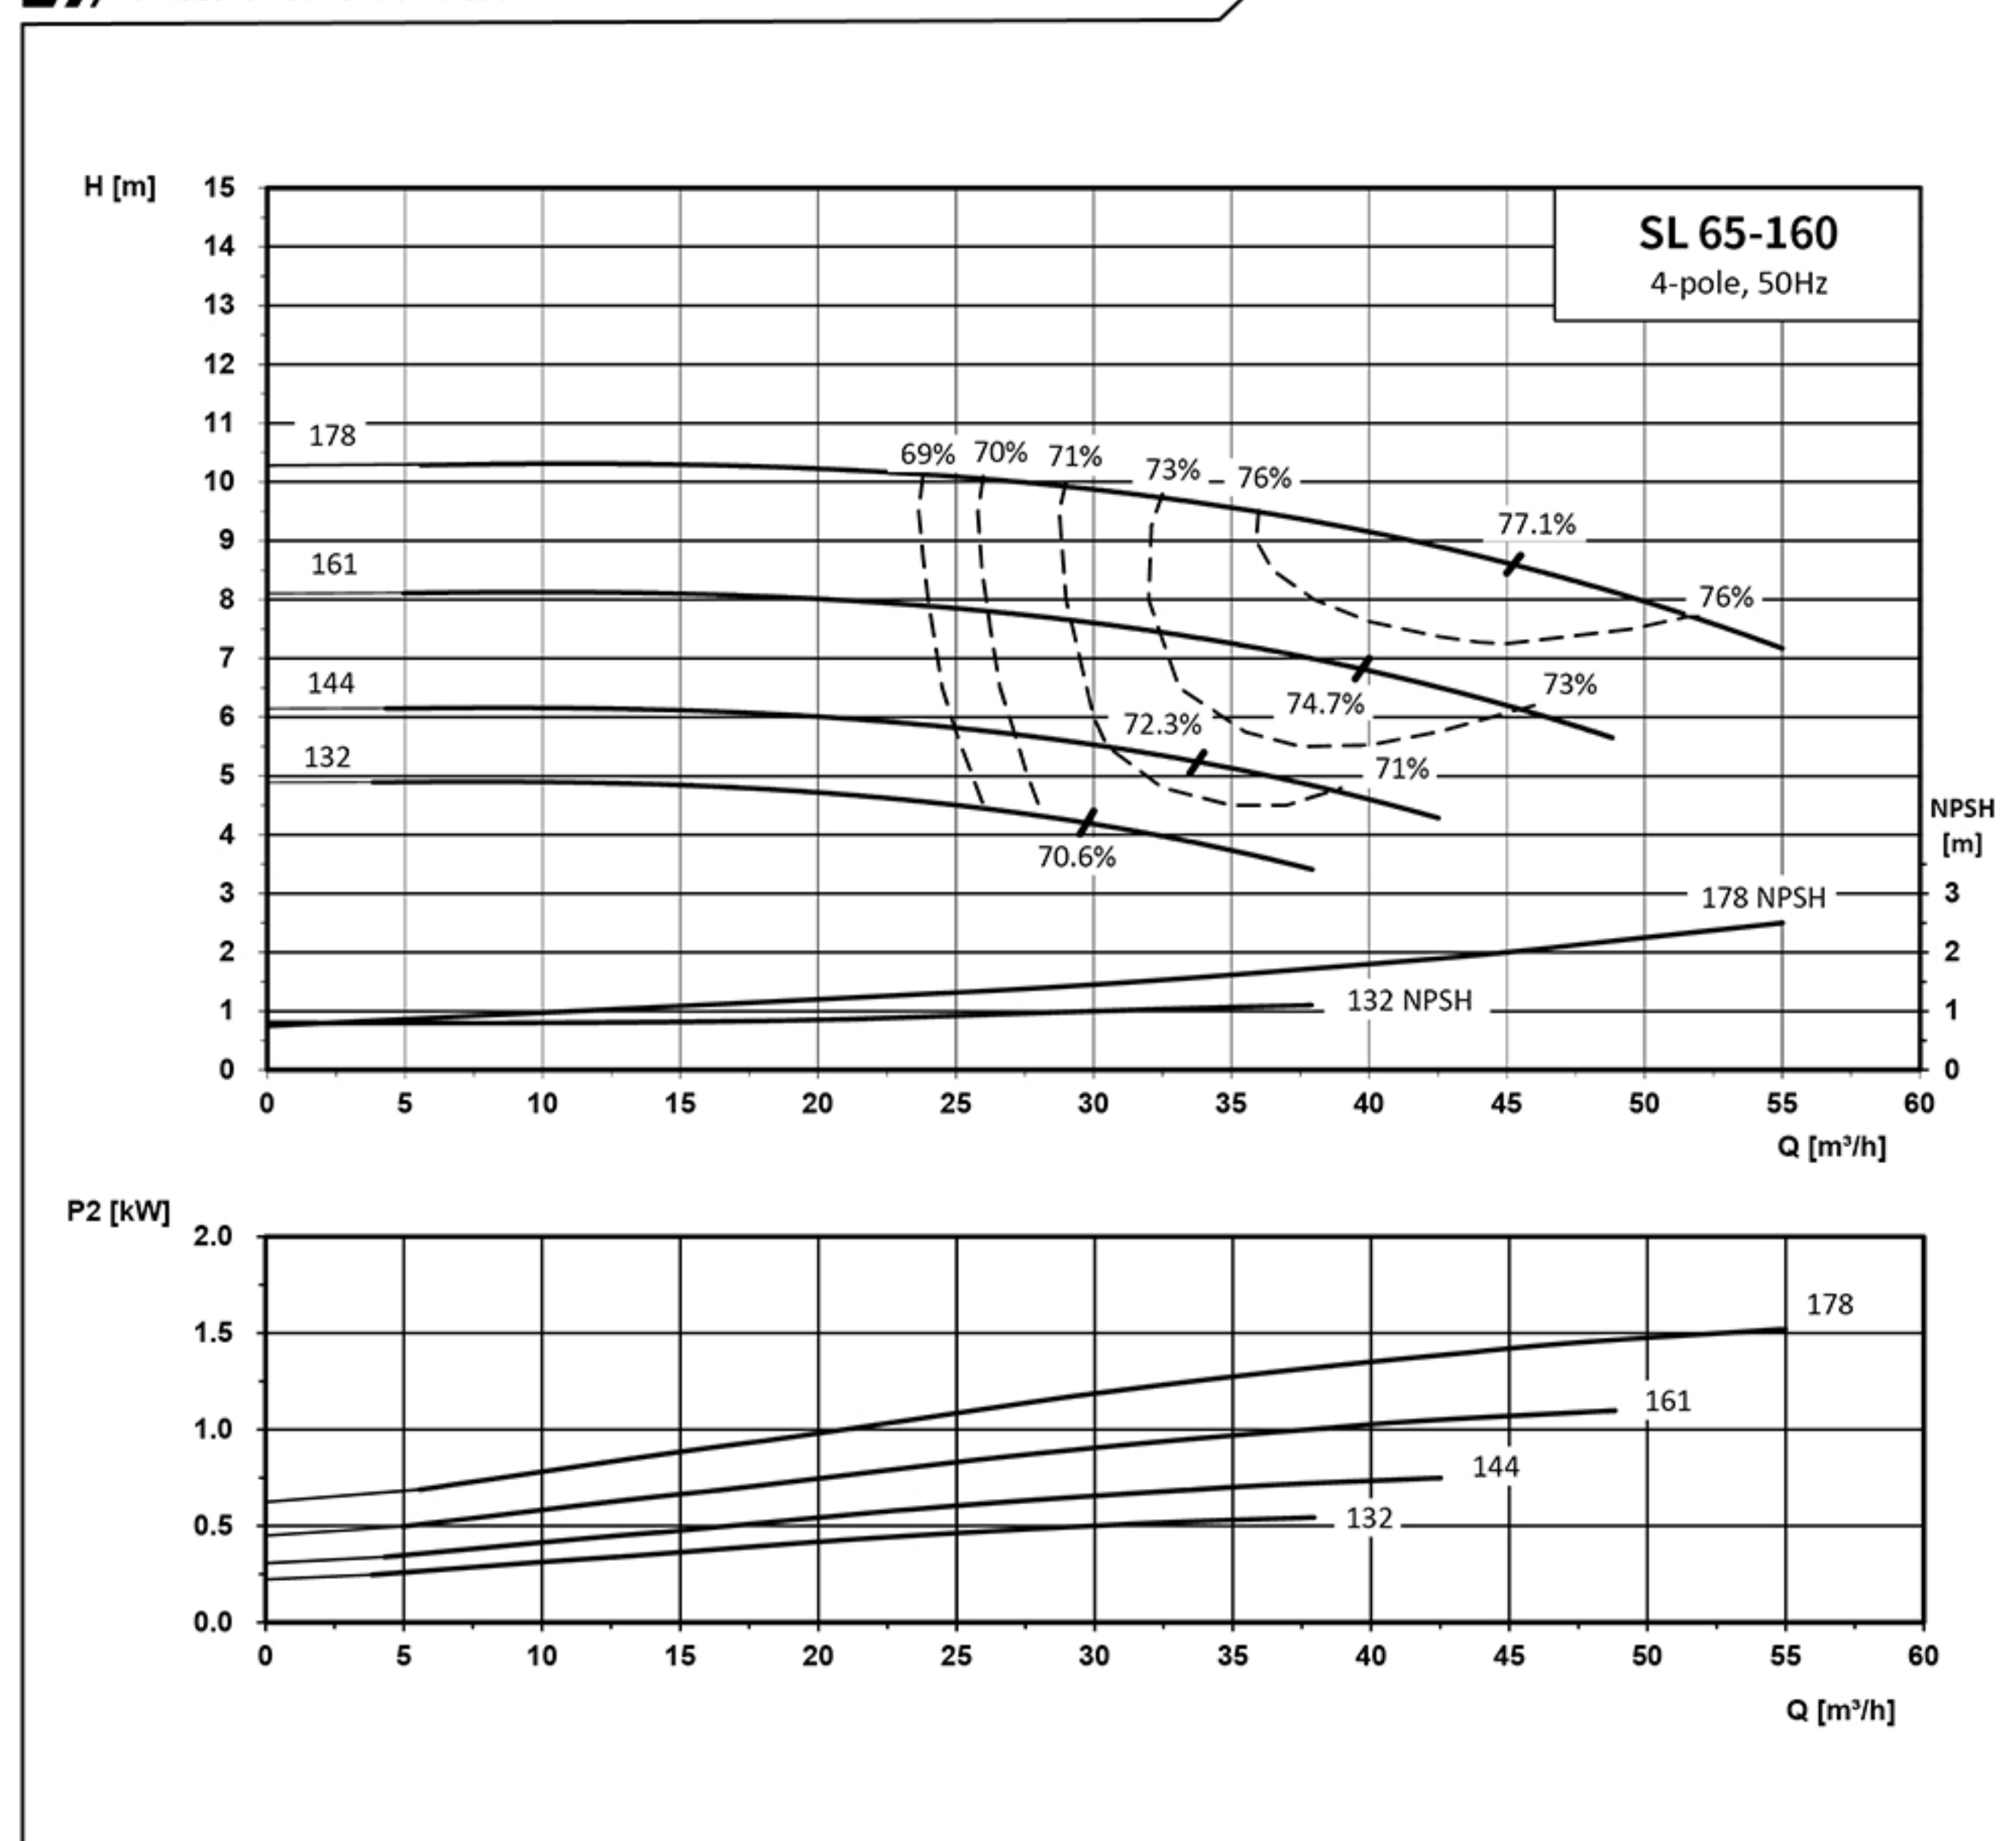

泵型号	Pump Model	SL65-160-0.55-4	SL65-160-0.75-4	SL65-160-1.1-4	SL65-160-1.5-4
电机型号	Motor Model	YE3-80M1-4	YE3-80M2-4	YE3-90S-4	YE3-90L-4
电机功率(kW)	Motor Power(kW)	0.55	0.75	1.1	1.5
叶轮直径(mm)	Impeller Diameter(mm)	132	144	161	178

SL 80-160


性能曲线和技术数据 Performance Curves and Technical Data

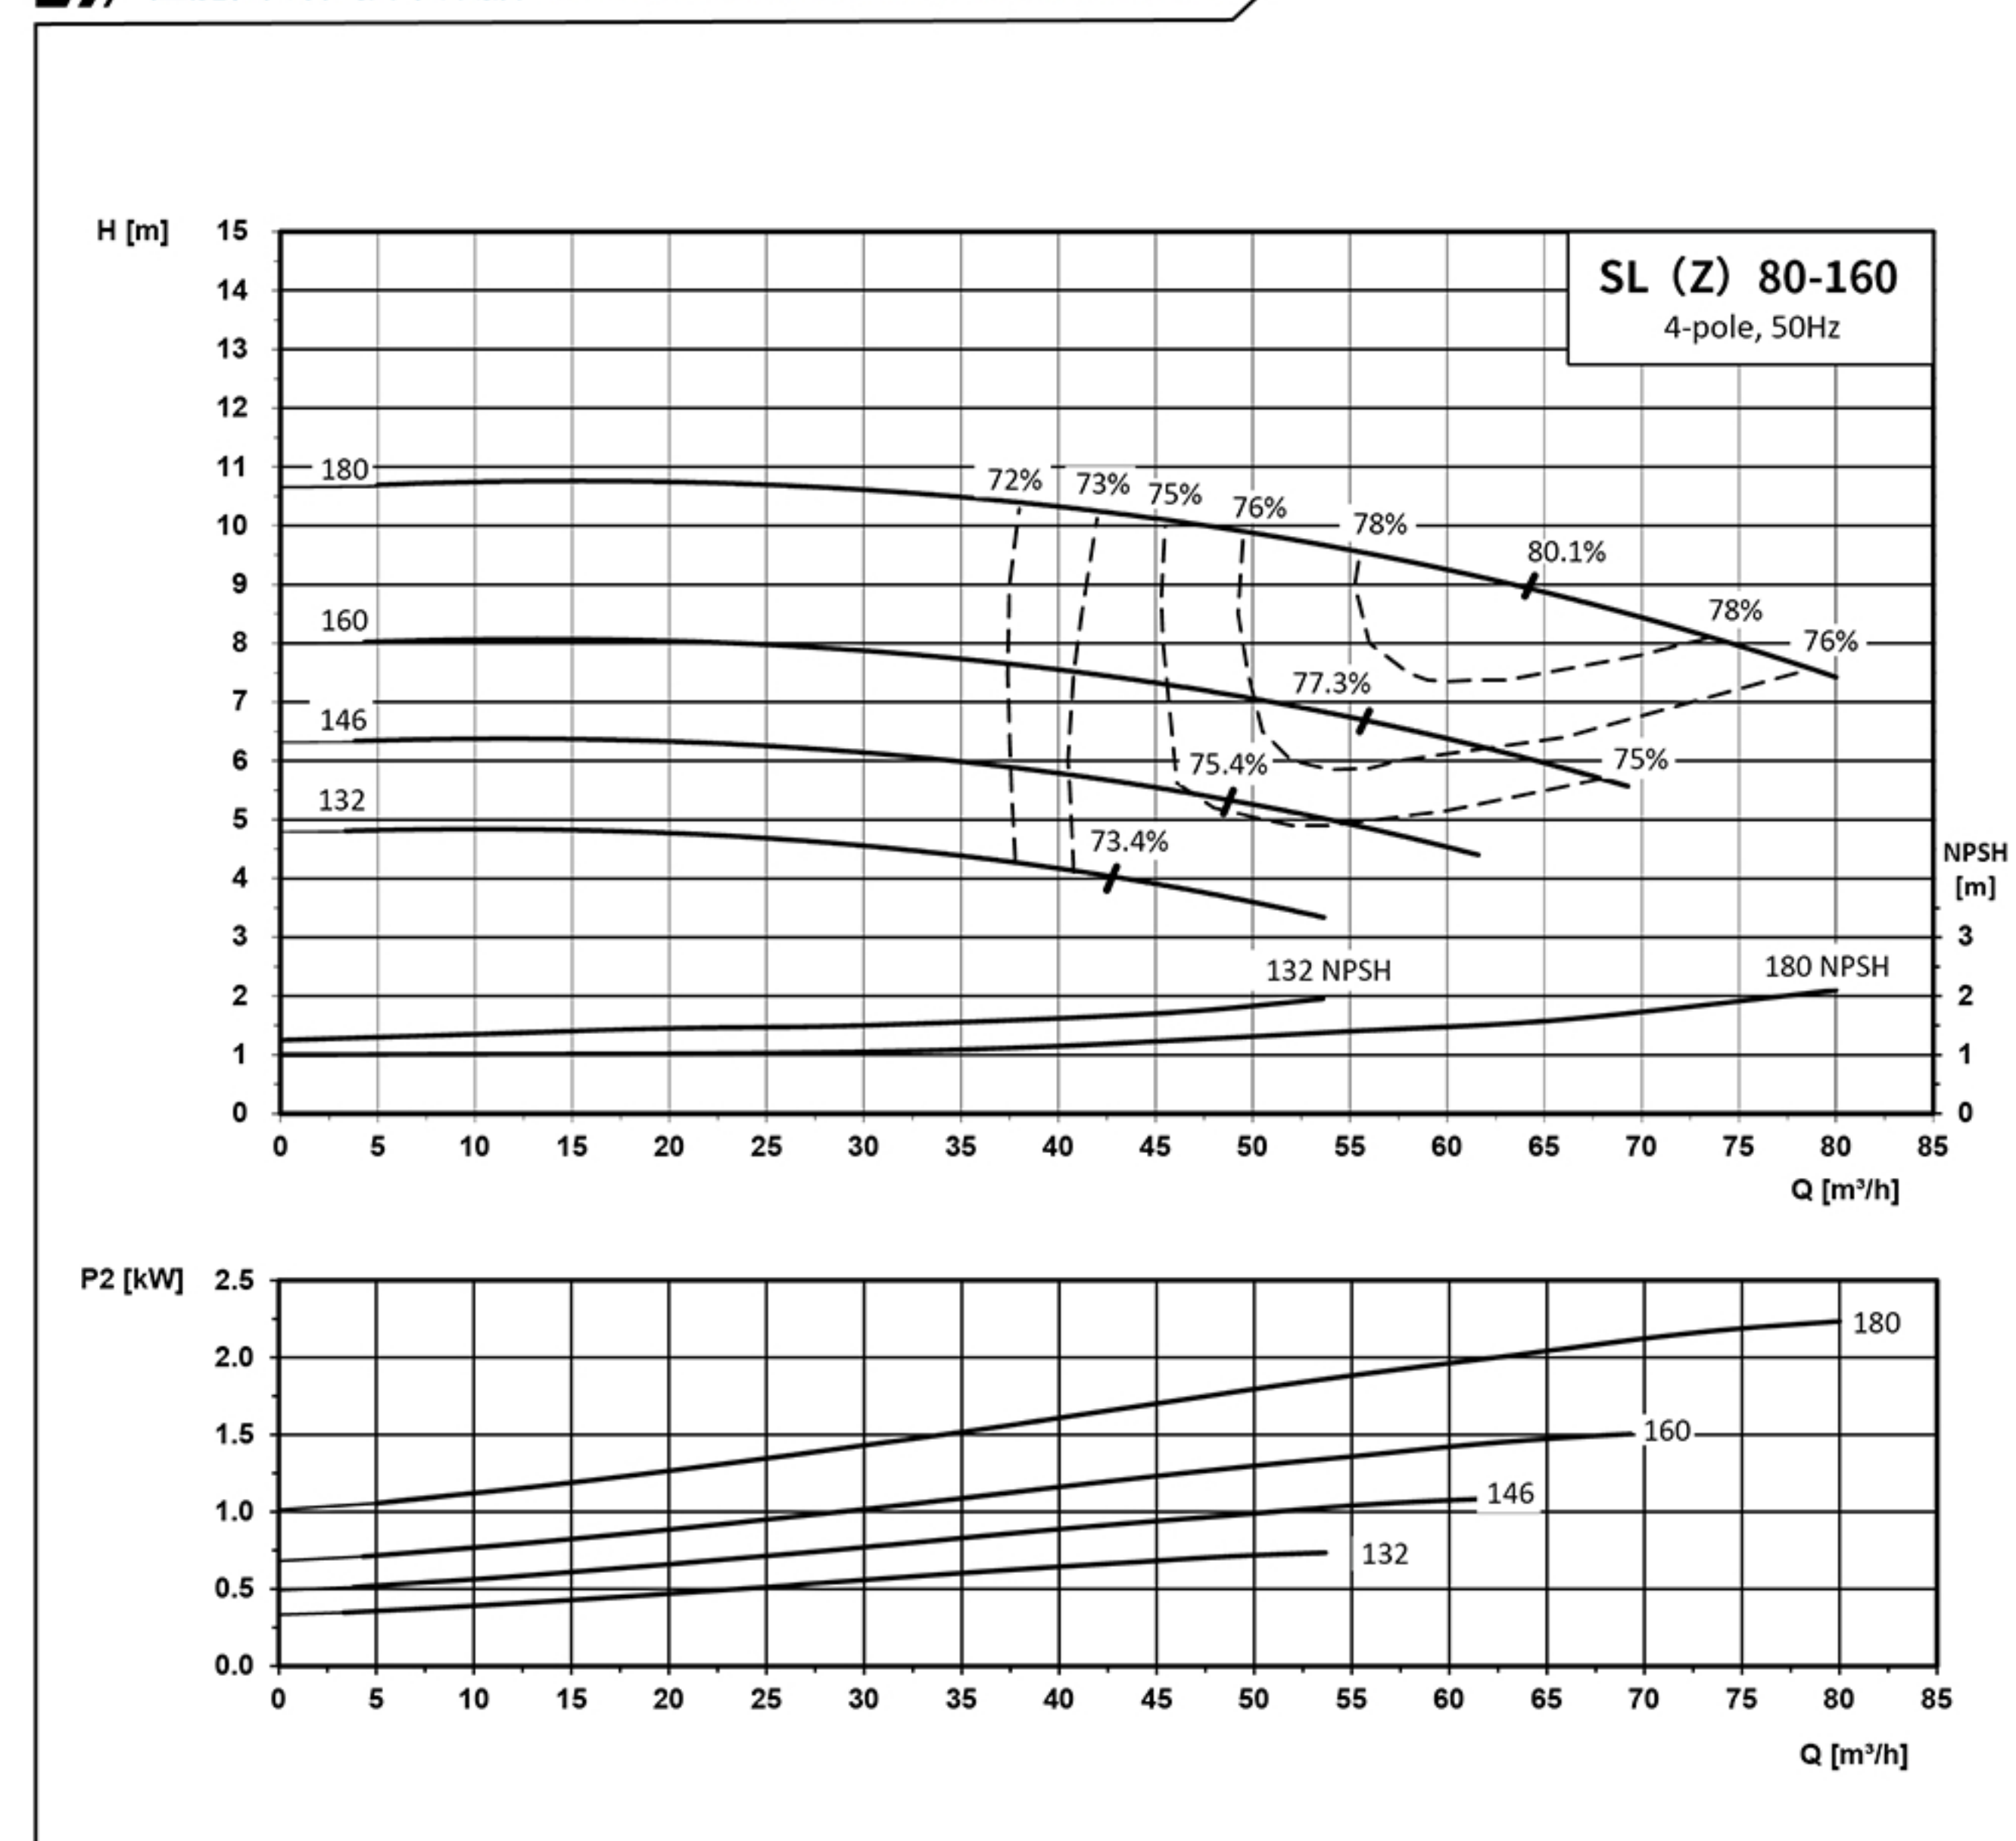

泵型号	Pump Model	SL80-160-0.75-4	SL80-160-1.1-4	SL80-160-1.5-4	SL(Z)80-160-2.2-4
电机型号	Motor Model	YE3-80M2-4	YE3-90S-4	YE3-90L-4	YE3-100L1-4
电机功率(kW)	Motor Power(kW)	0.75	1.1	1.5	2.2
叶轮直径(mm)	Impeller Diameter(mm)	132	146	160	180

SL(Z) 100-160


性能曲线和技术数据 Performance Curves and Technical Data

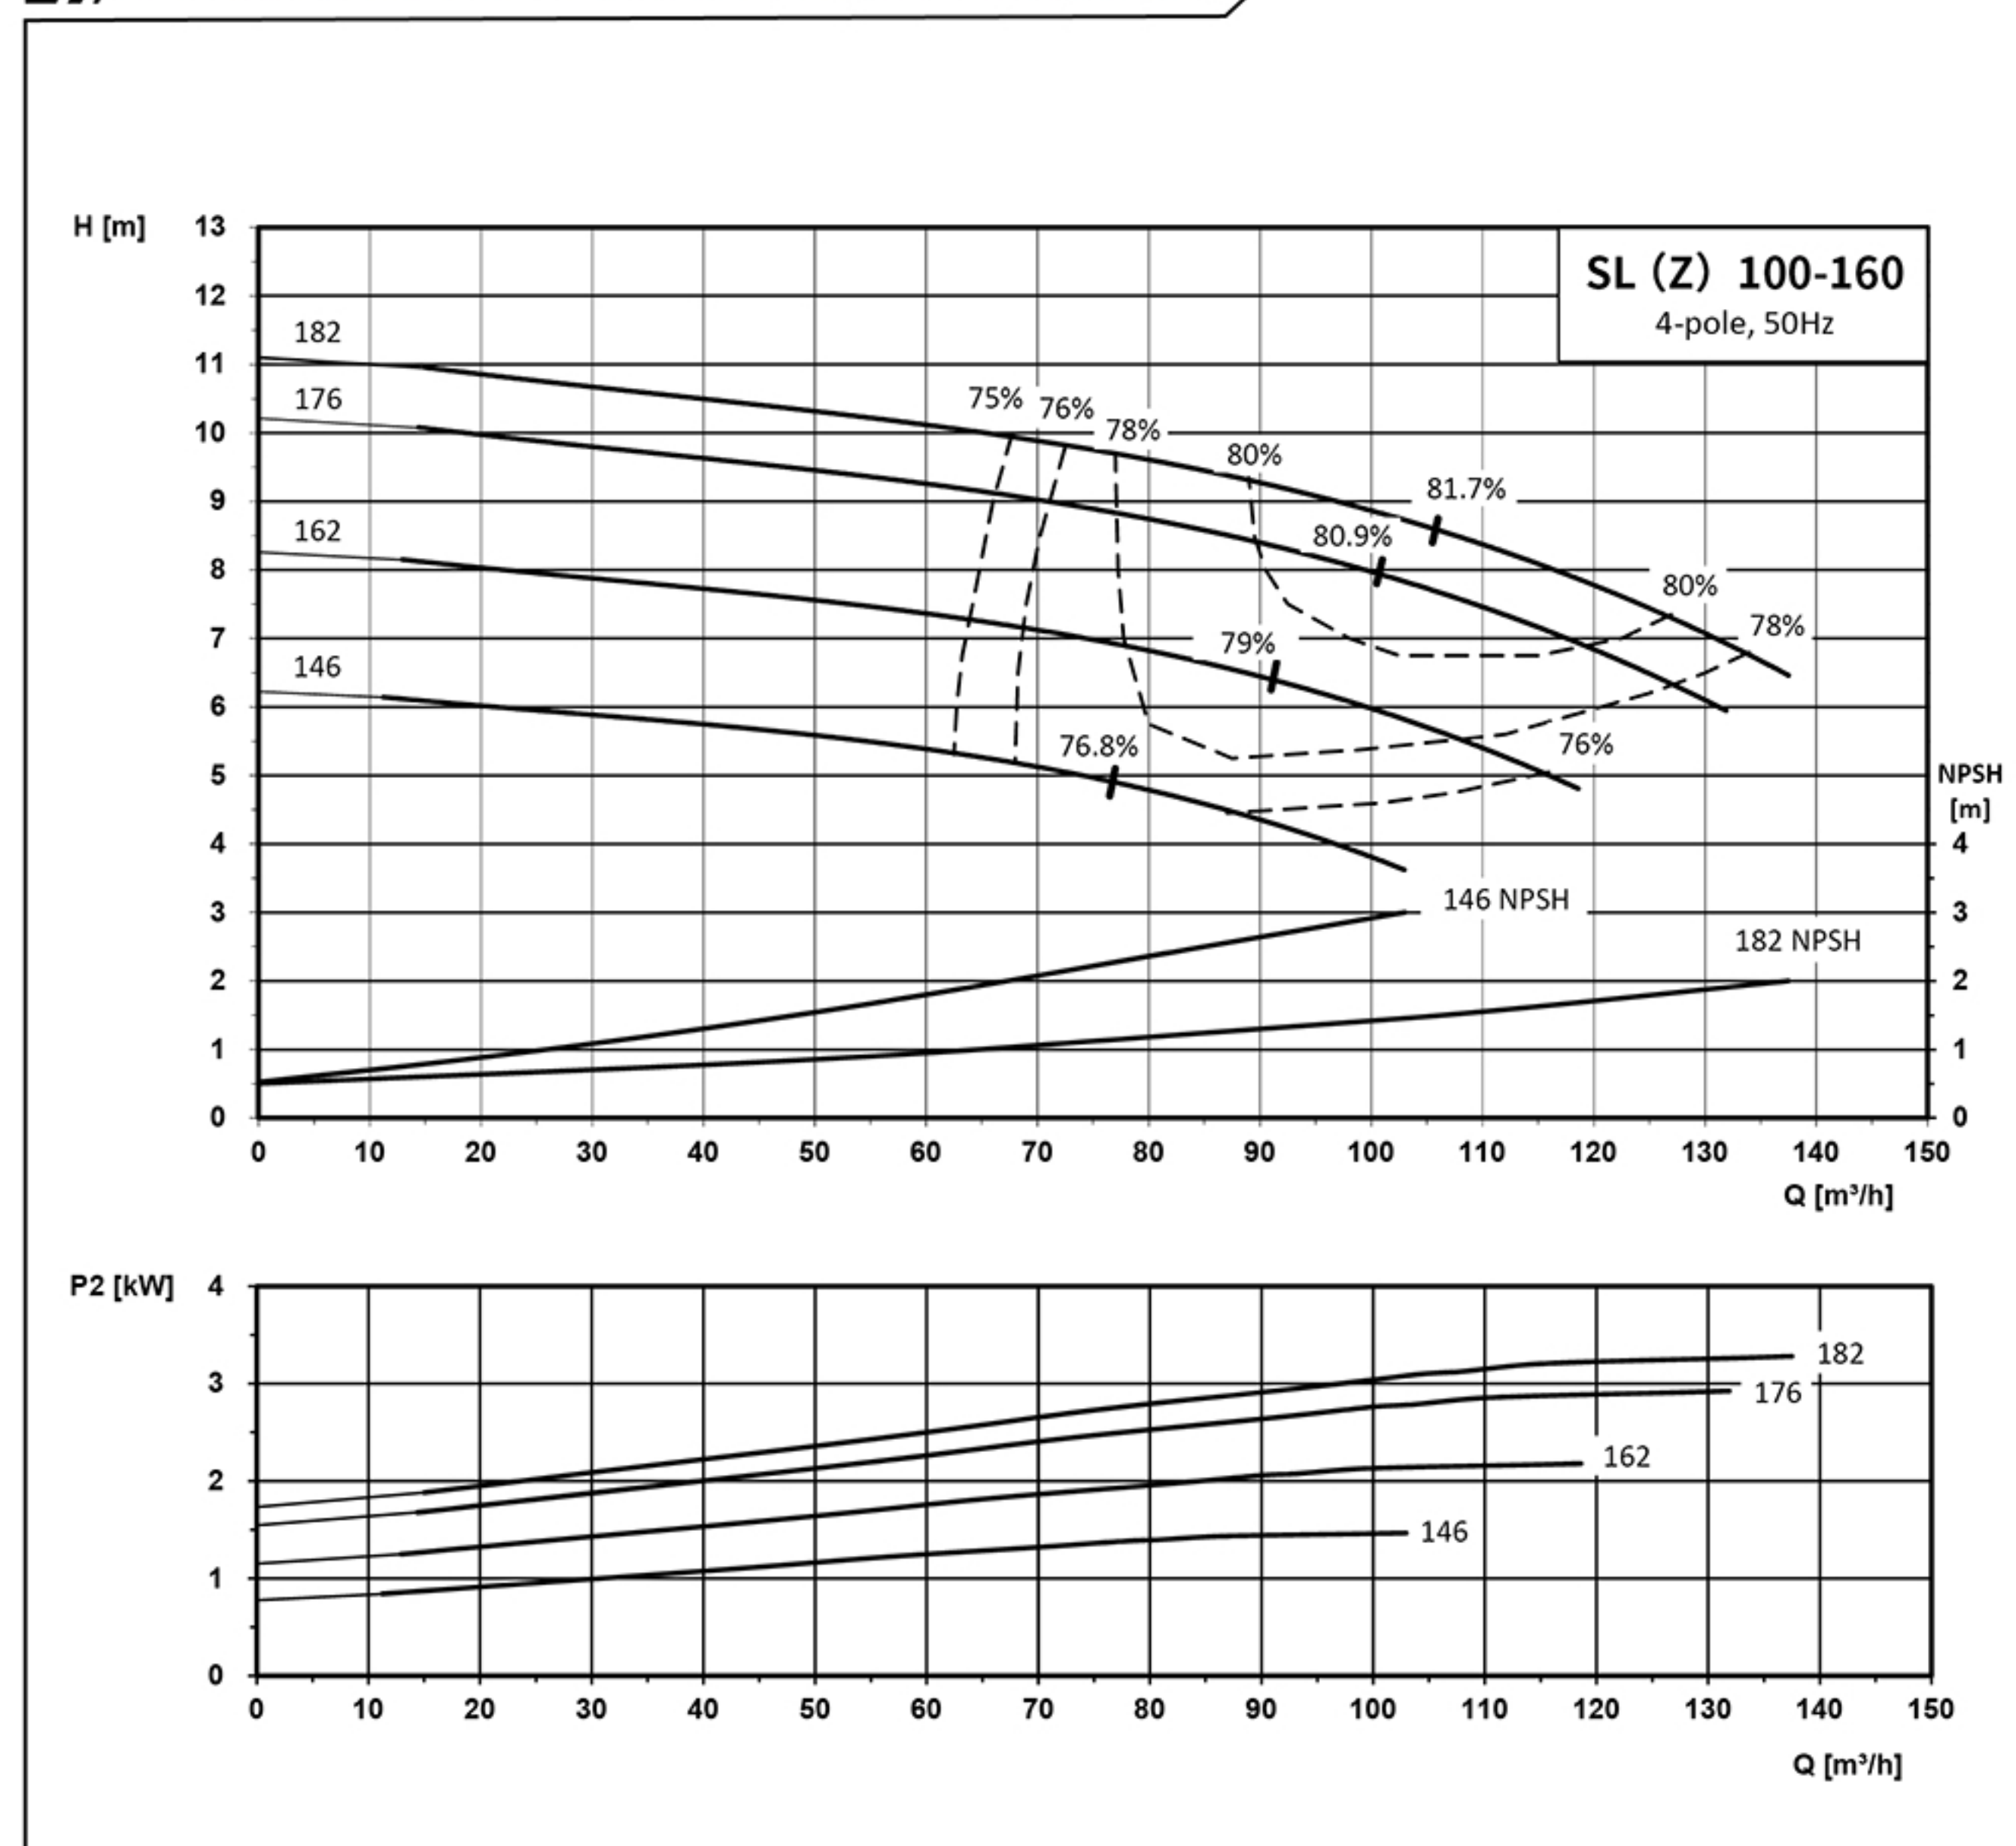

泵型号	Pump Model	SL100-160-1.5-4	SL(Z)100-160-2.2-4	SL(Z)100-160-3-4	SL(Z)100-160-4-4
电机型号	Motor Model	YE3-90L-4	YE3-100L1-4	YE3-100L2-4	YE3-112M-4
电机功率(kW)	Motor Power(kW)	1.5	2.2	3	4
叶轮直径(mm)	Impeller Diameter(mm)	146	162	176	182

SL 125-160


性能曲线和技术数据 Performance Curves and Technical Data

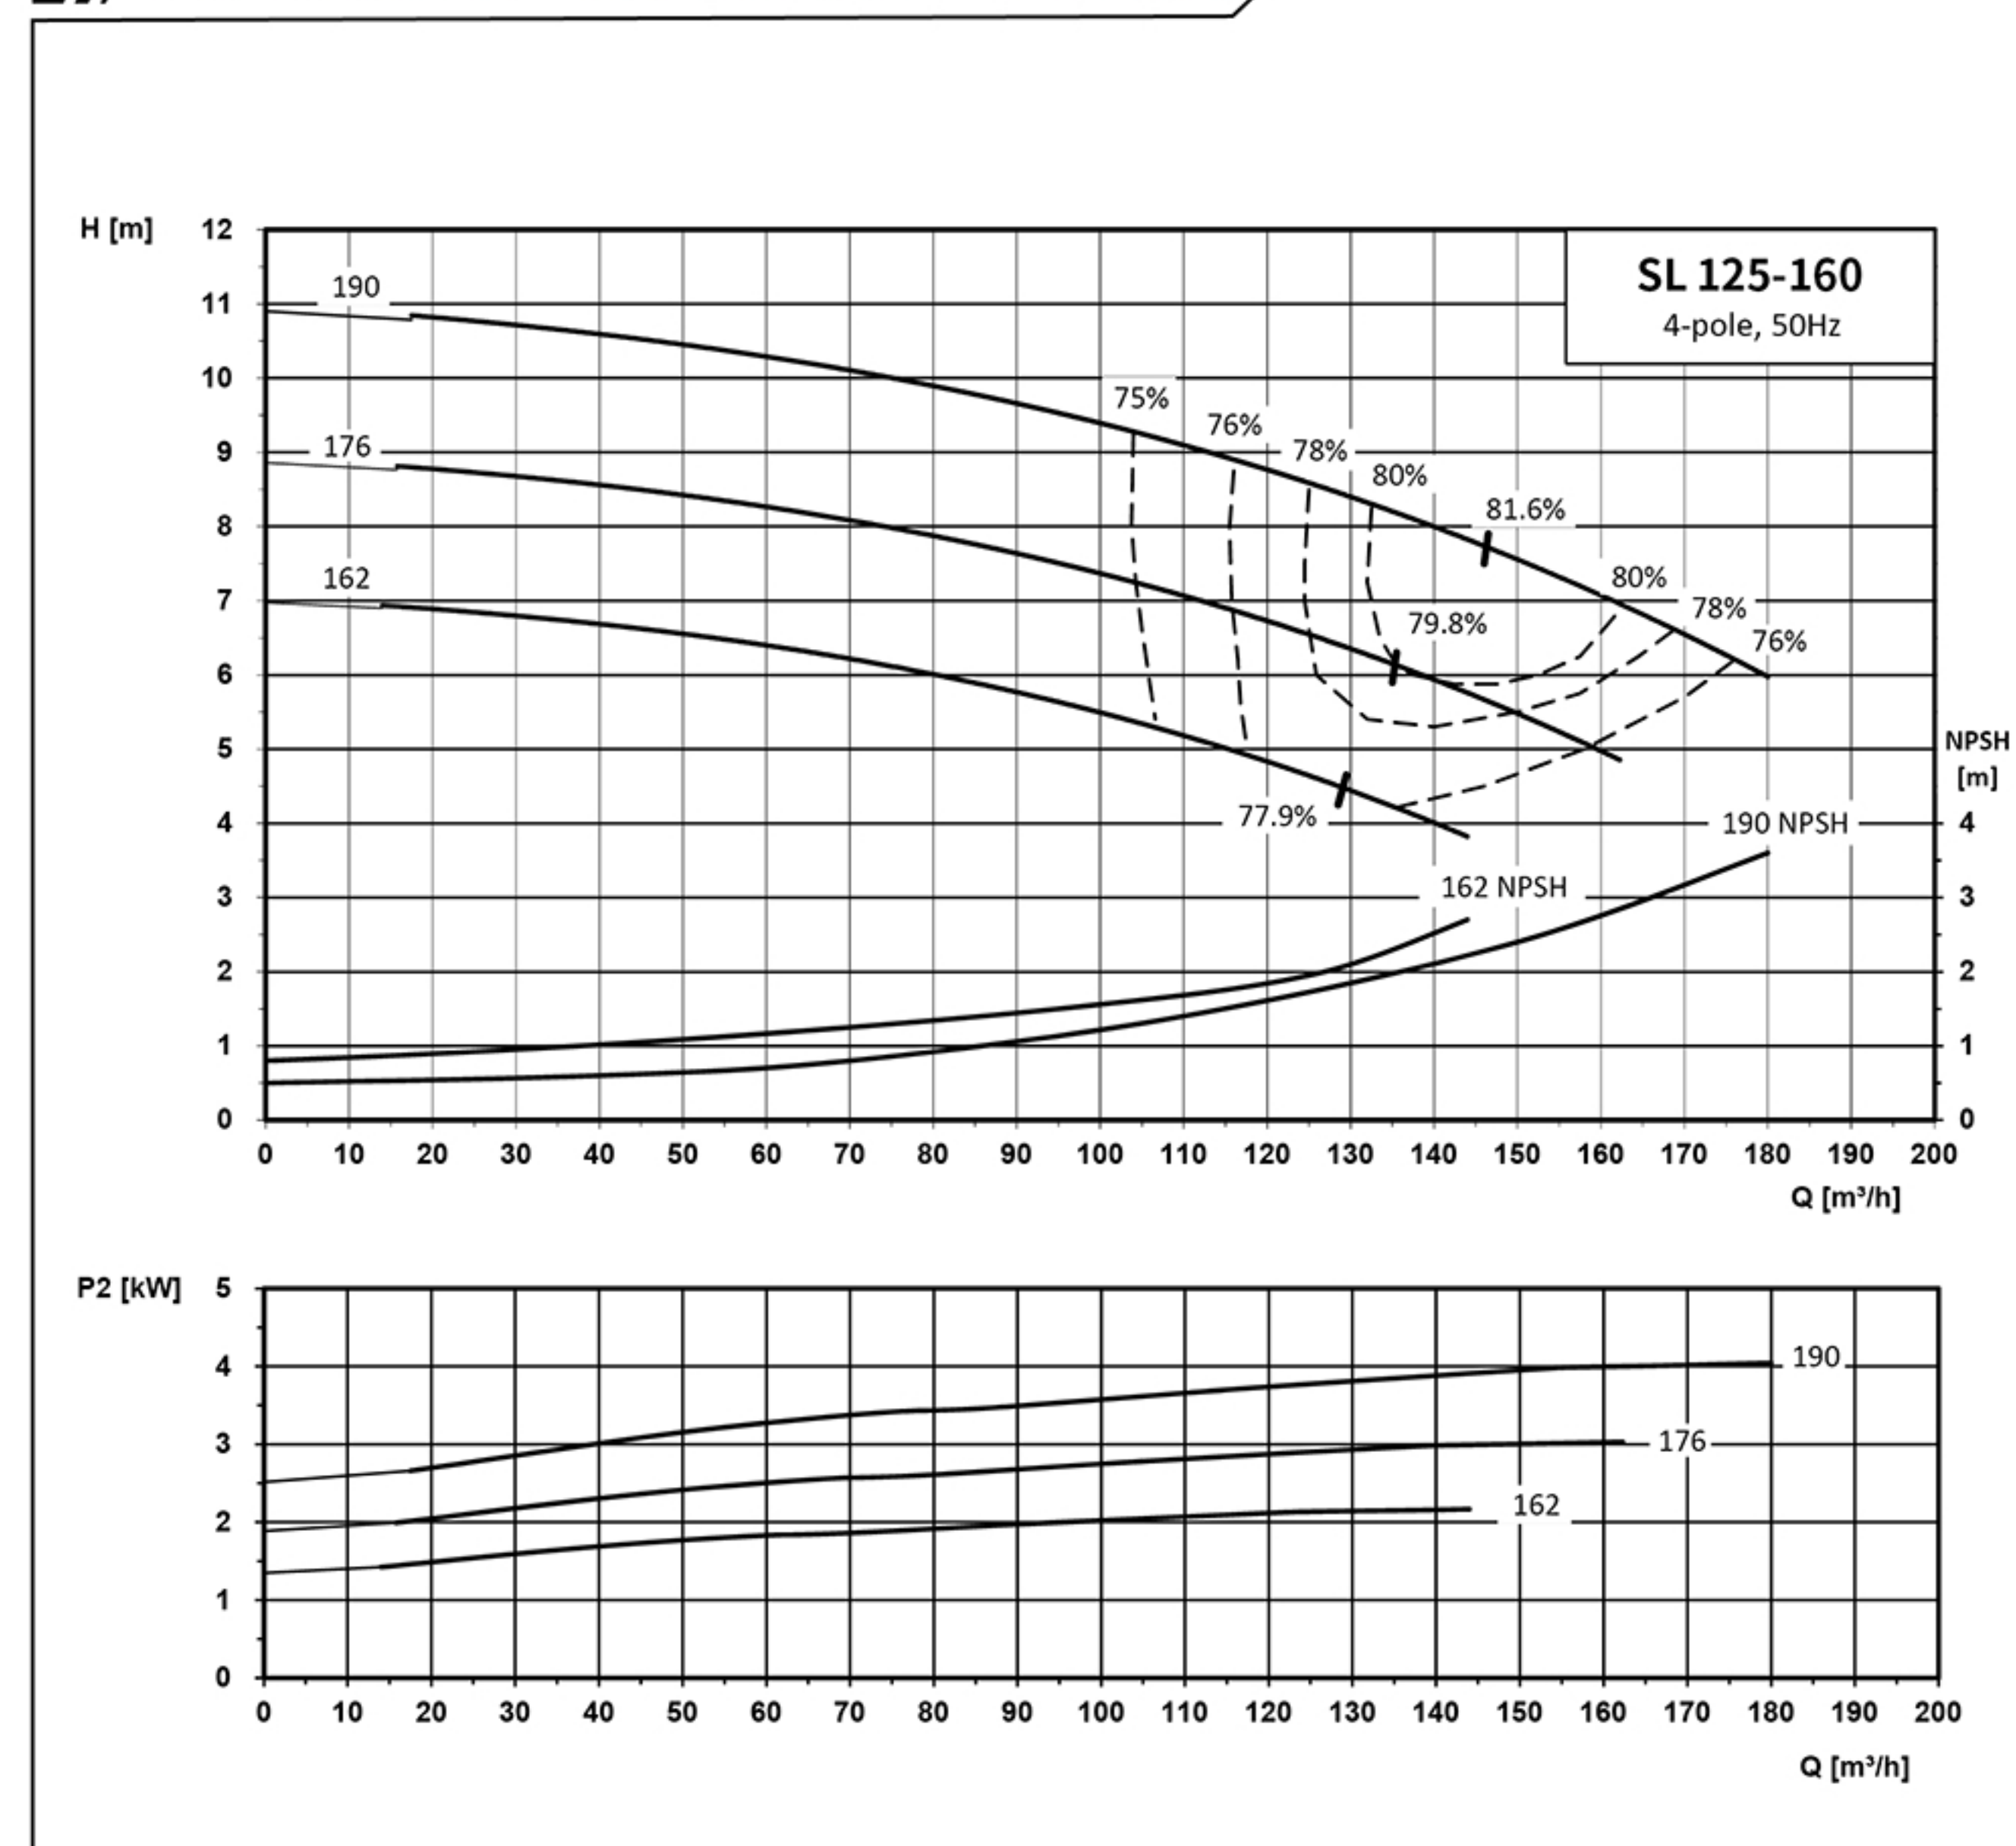

泵型号	Pump Model	SL125-160-2.2-4	SL125-160-3-4	SL125-160-4-4
电机型号	Motor Model	YE3-100L1-4	YE3-100L2-4	YE3-112M-4
电机功率(kW)	Motor Power(kW)	2.2	3	4
叶轮直径(mm)	Impeller Diameter(mm)	162	176	190

SL 32-200


性能曲线和技术数据 Performance Curves and Technical Data

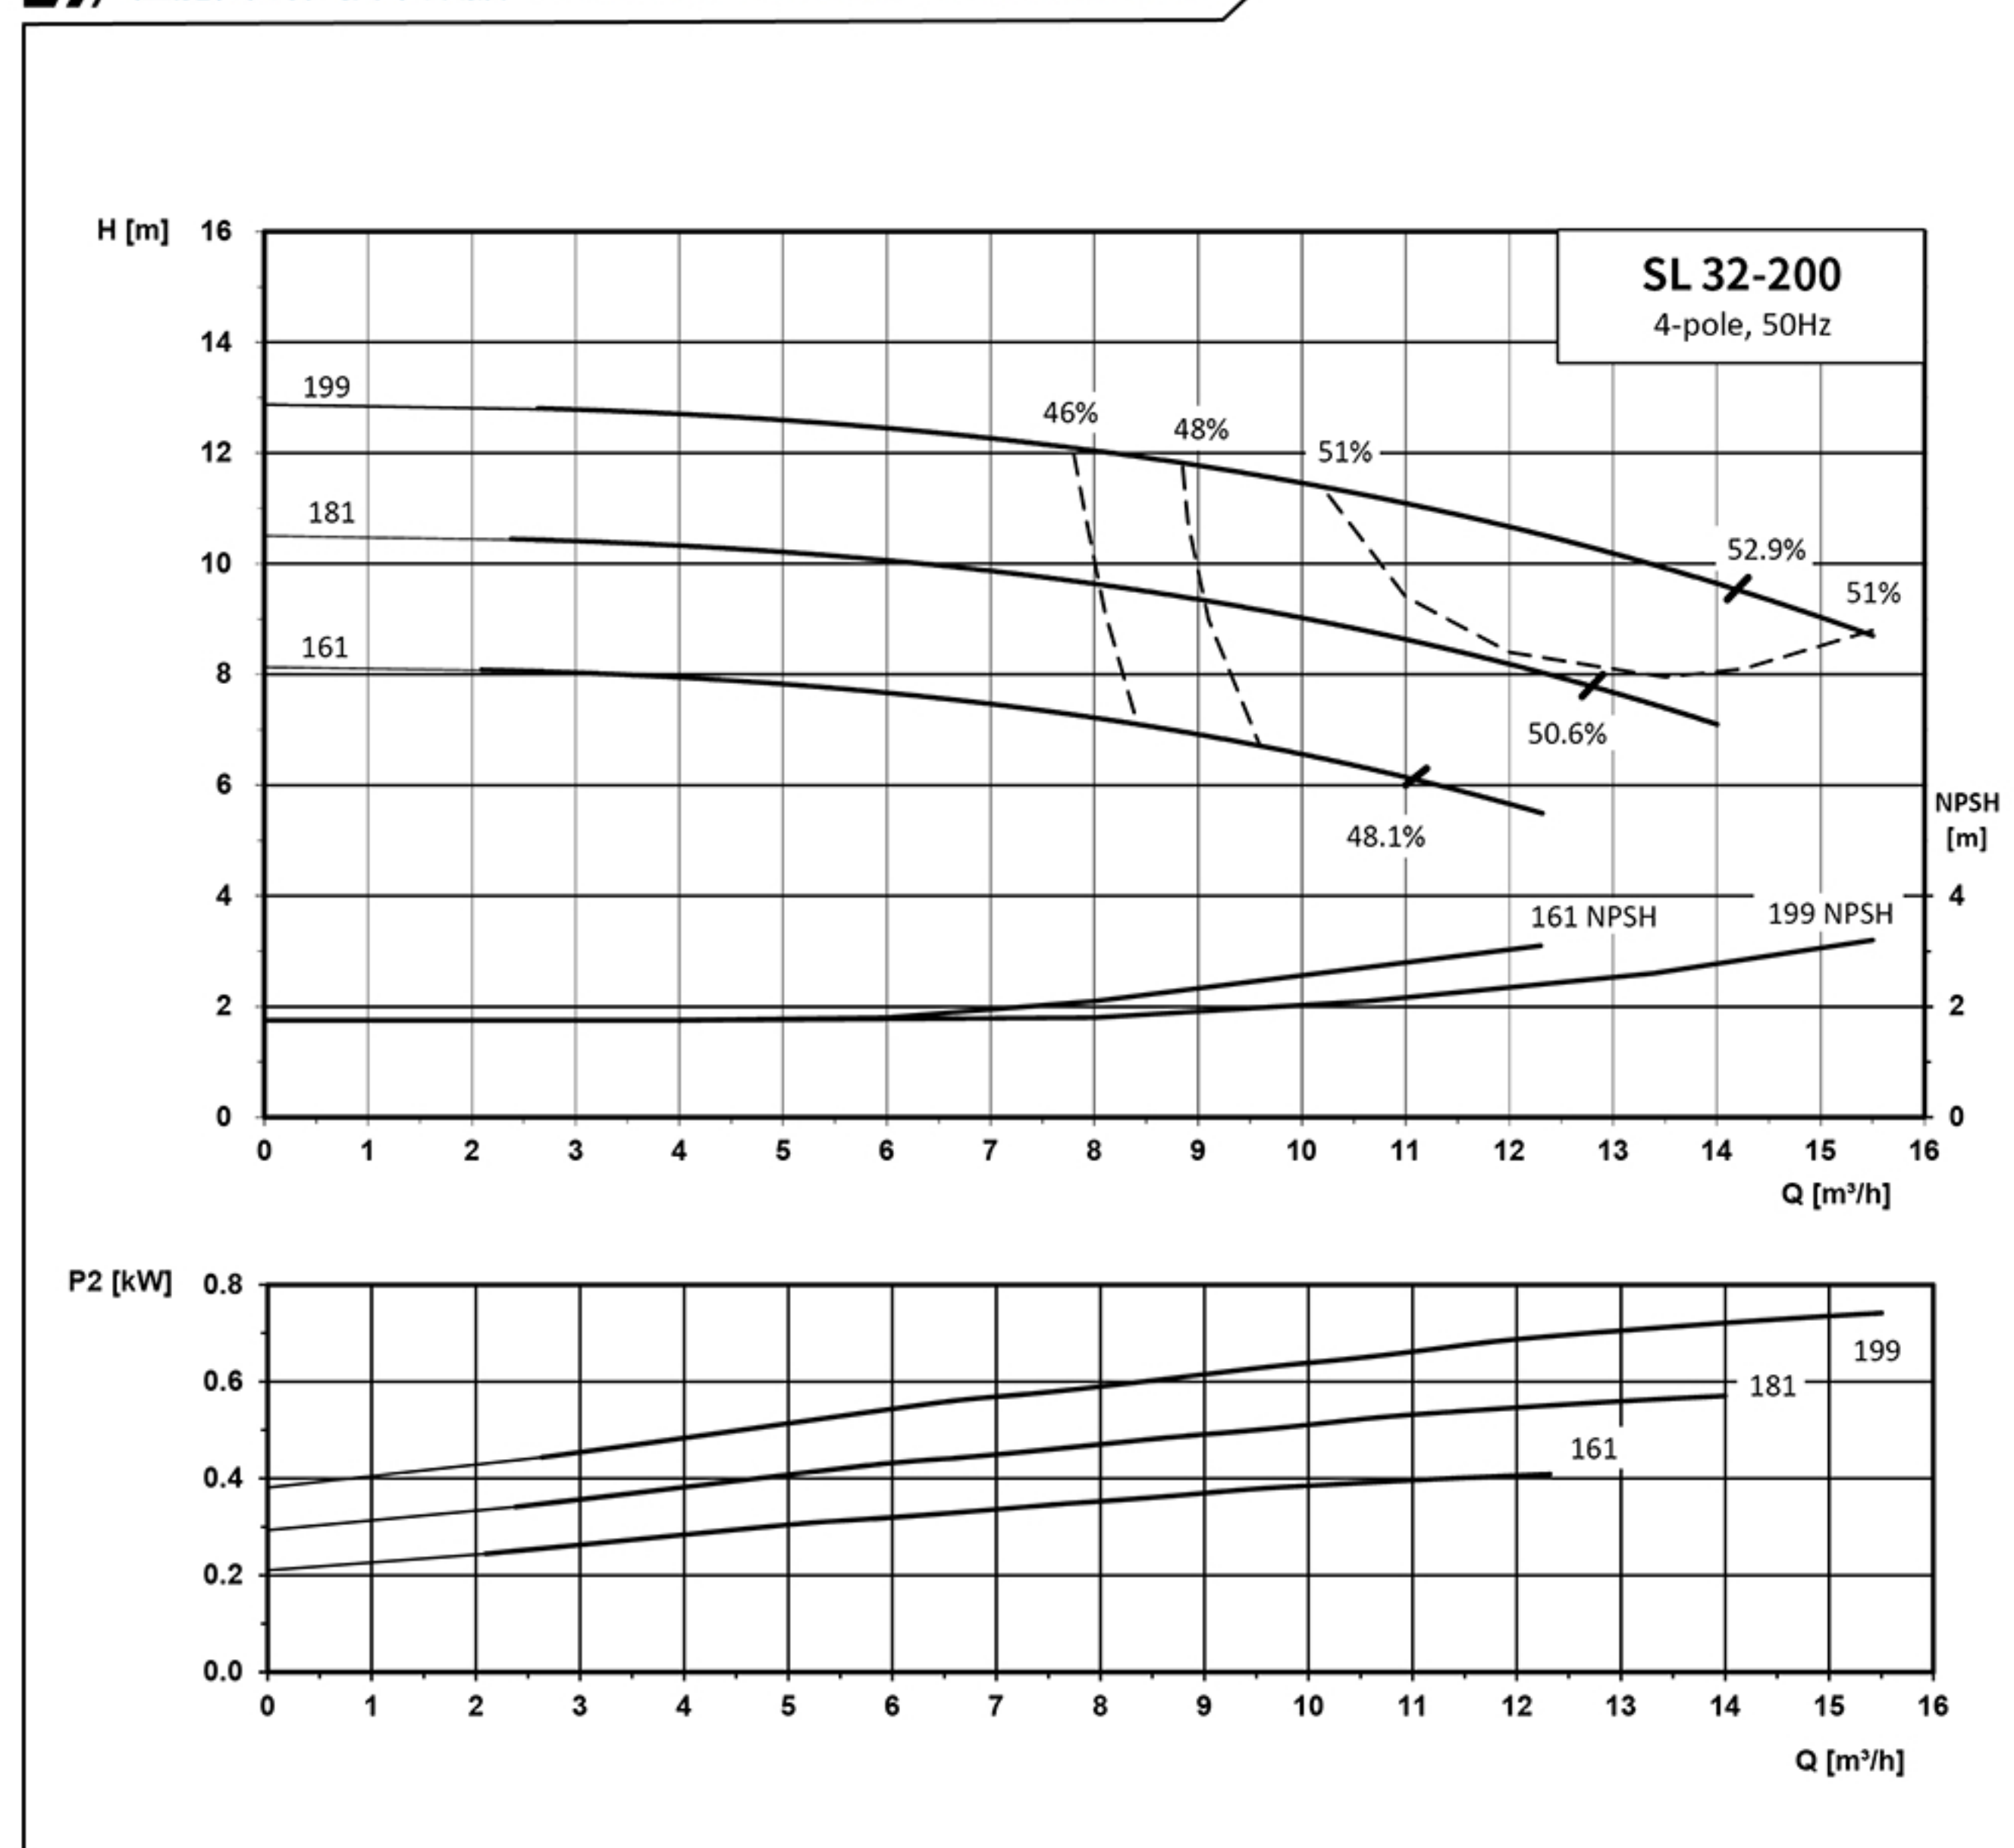

泵型号	Pump Model	SL32-200-0.55-4	SL32-200-0.55-4	SL32-200-0.75-4
电机型号	Motor Model	YE3-80M1-4	YE3-80M1-4	YE3-80M2-4
电机功率(kW)	Motor Power(kW)	0.55	0.55	0.75
叶轮直径(mm)	Impeller Diameter(mm)	161	181	199

SL 40-200


性能曲线和技术数据 Performance Curves and Technical Data

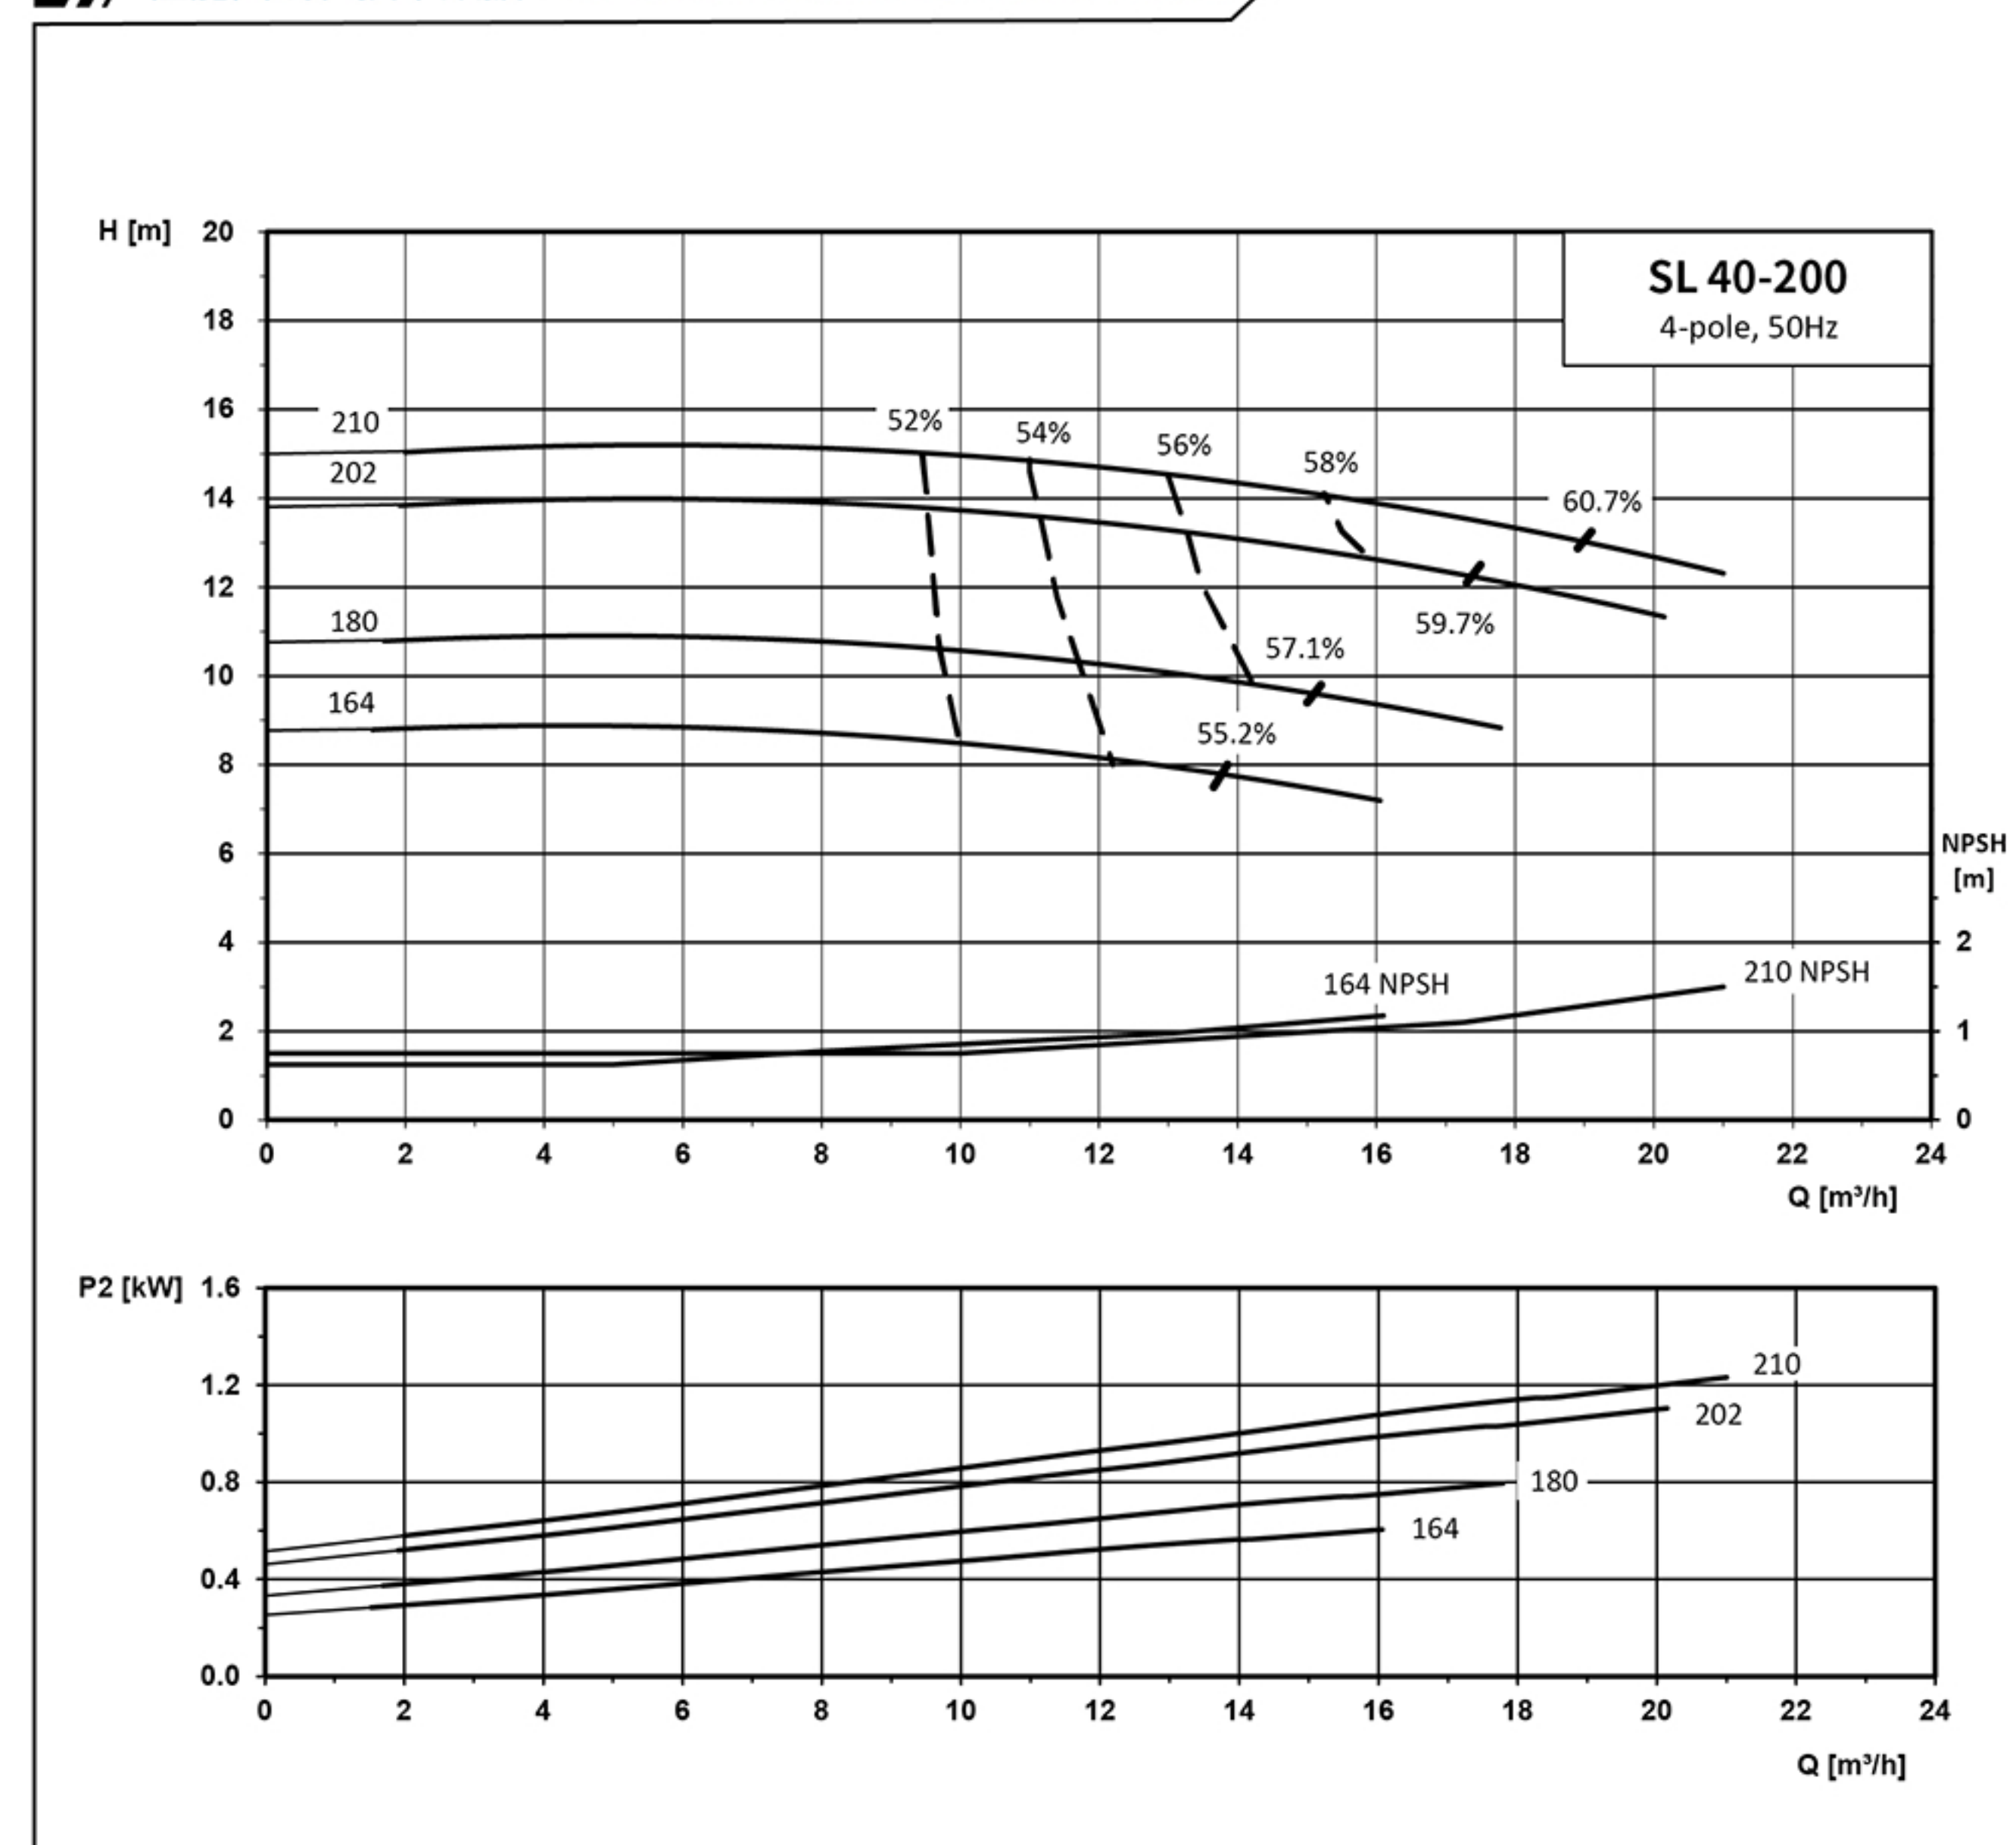

泵型号	Pump Model	SL40-200-0.55-4	SL40-200-0.75-4	SL40-200-1.1-4	SL40-200-1.5-4
电机型号	Motor Model	YE3-80M1-4	YE3-80M2-4	YE3-90S-4	YE3-90L-4
电机功率(kW)	Motor Power(kW)	0.55	0.75	1.1	1.5
叶轮直径(mm)	Impeller Diameter(mm)	164	180	202	210

SL(Z) 50-200


性能曲线和技术数据 Performance Curves and Technical Data

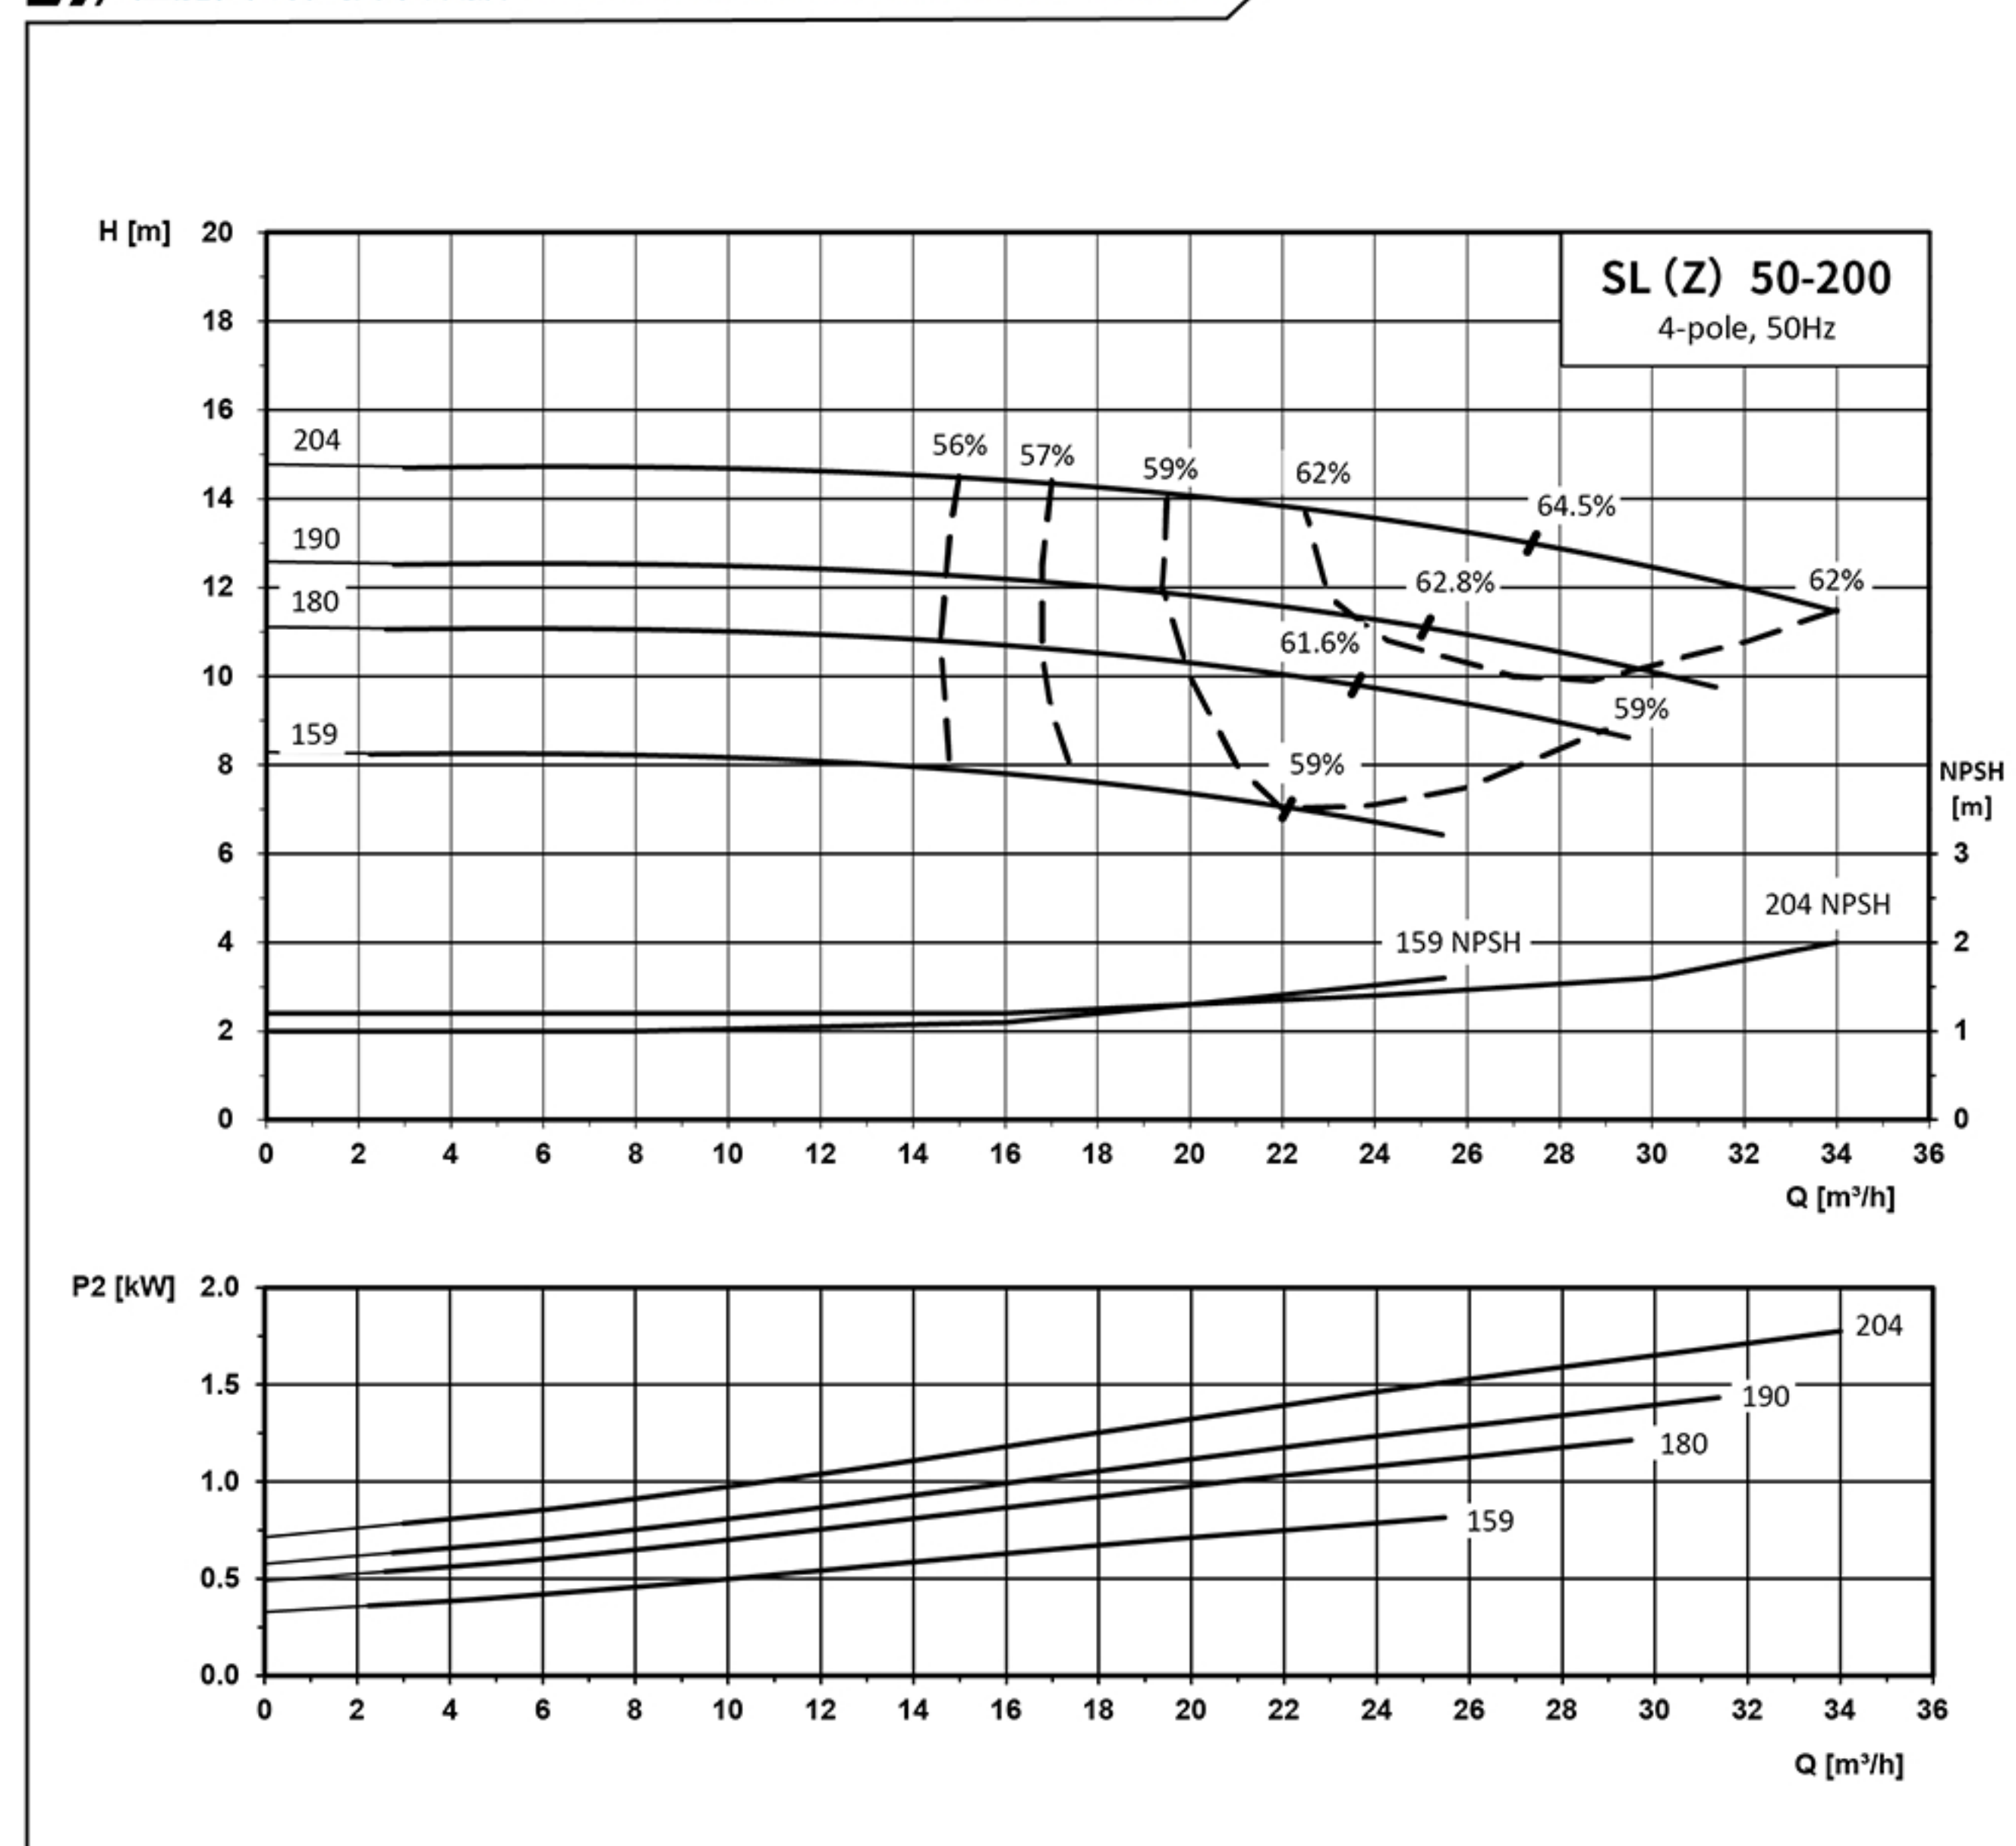

泵型号	Pump Model	SL50-200-0.75-4	SL50-200-1.1-4	SL50-200-1.5-4	SL(Z)50-200-2.2-4
电机型号	Motor Model	YE3-80M2-4	YE3-90S-4	YE3-90L-4	YE3-100L1-4
电机功率(kW)	Motor Power(kW)	0.75	1.1	1.5	2.2
叶轮直径(mm)	Impeller Diameter(mm)	159	180	190	204


SL(Z) 65-200

性能曲线和技术数据 Performance Curves and Technical Data

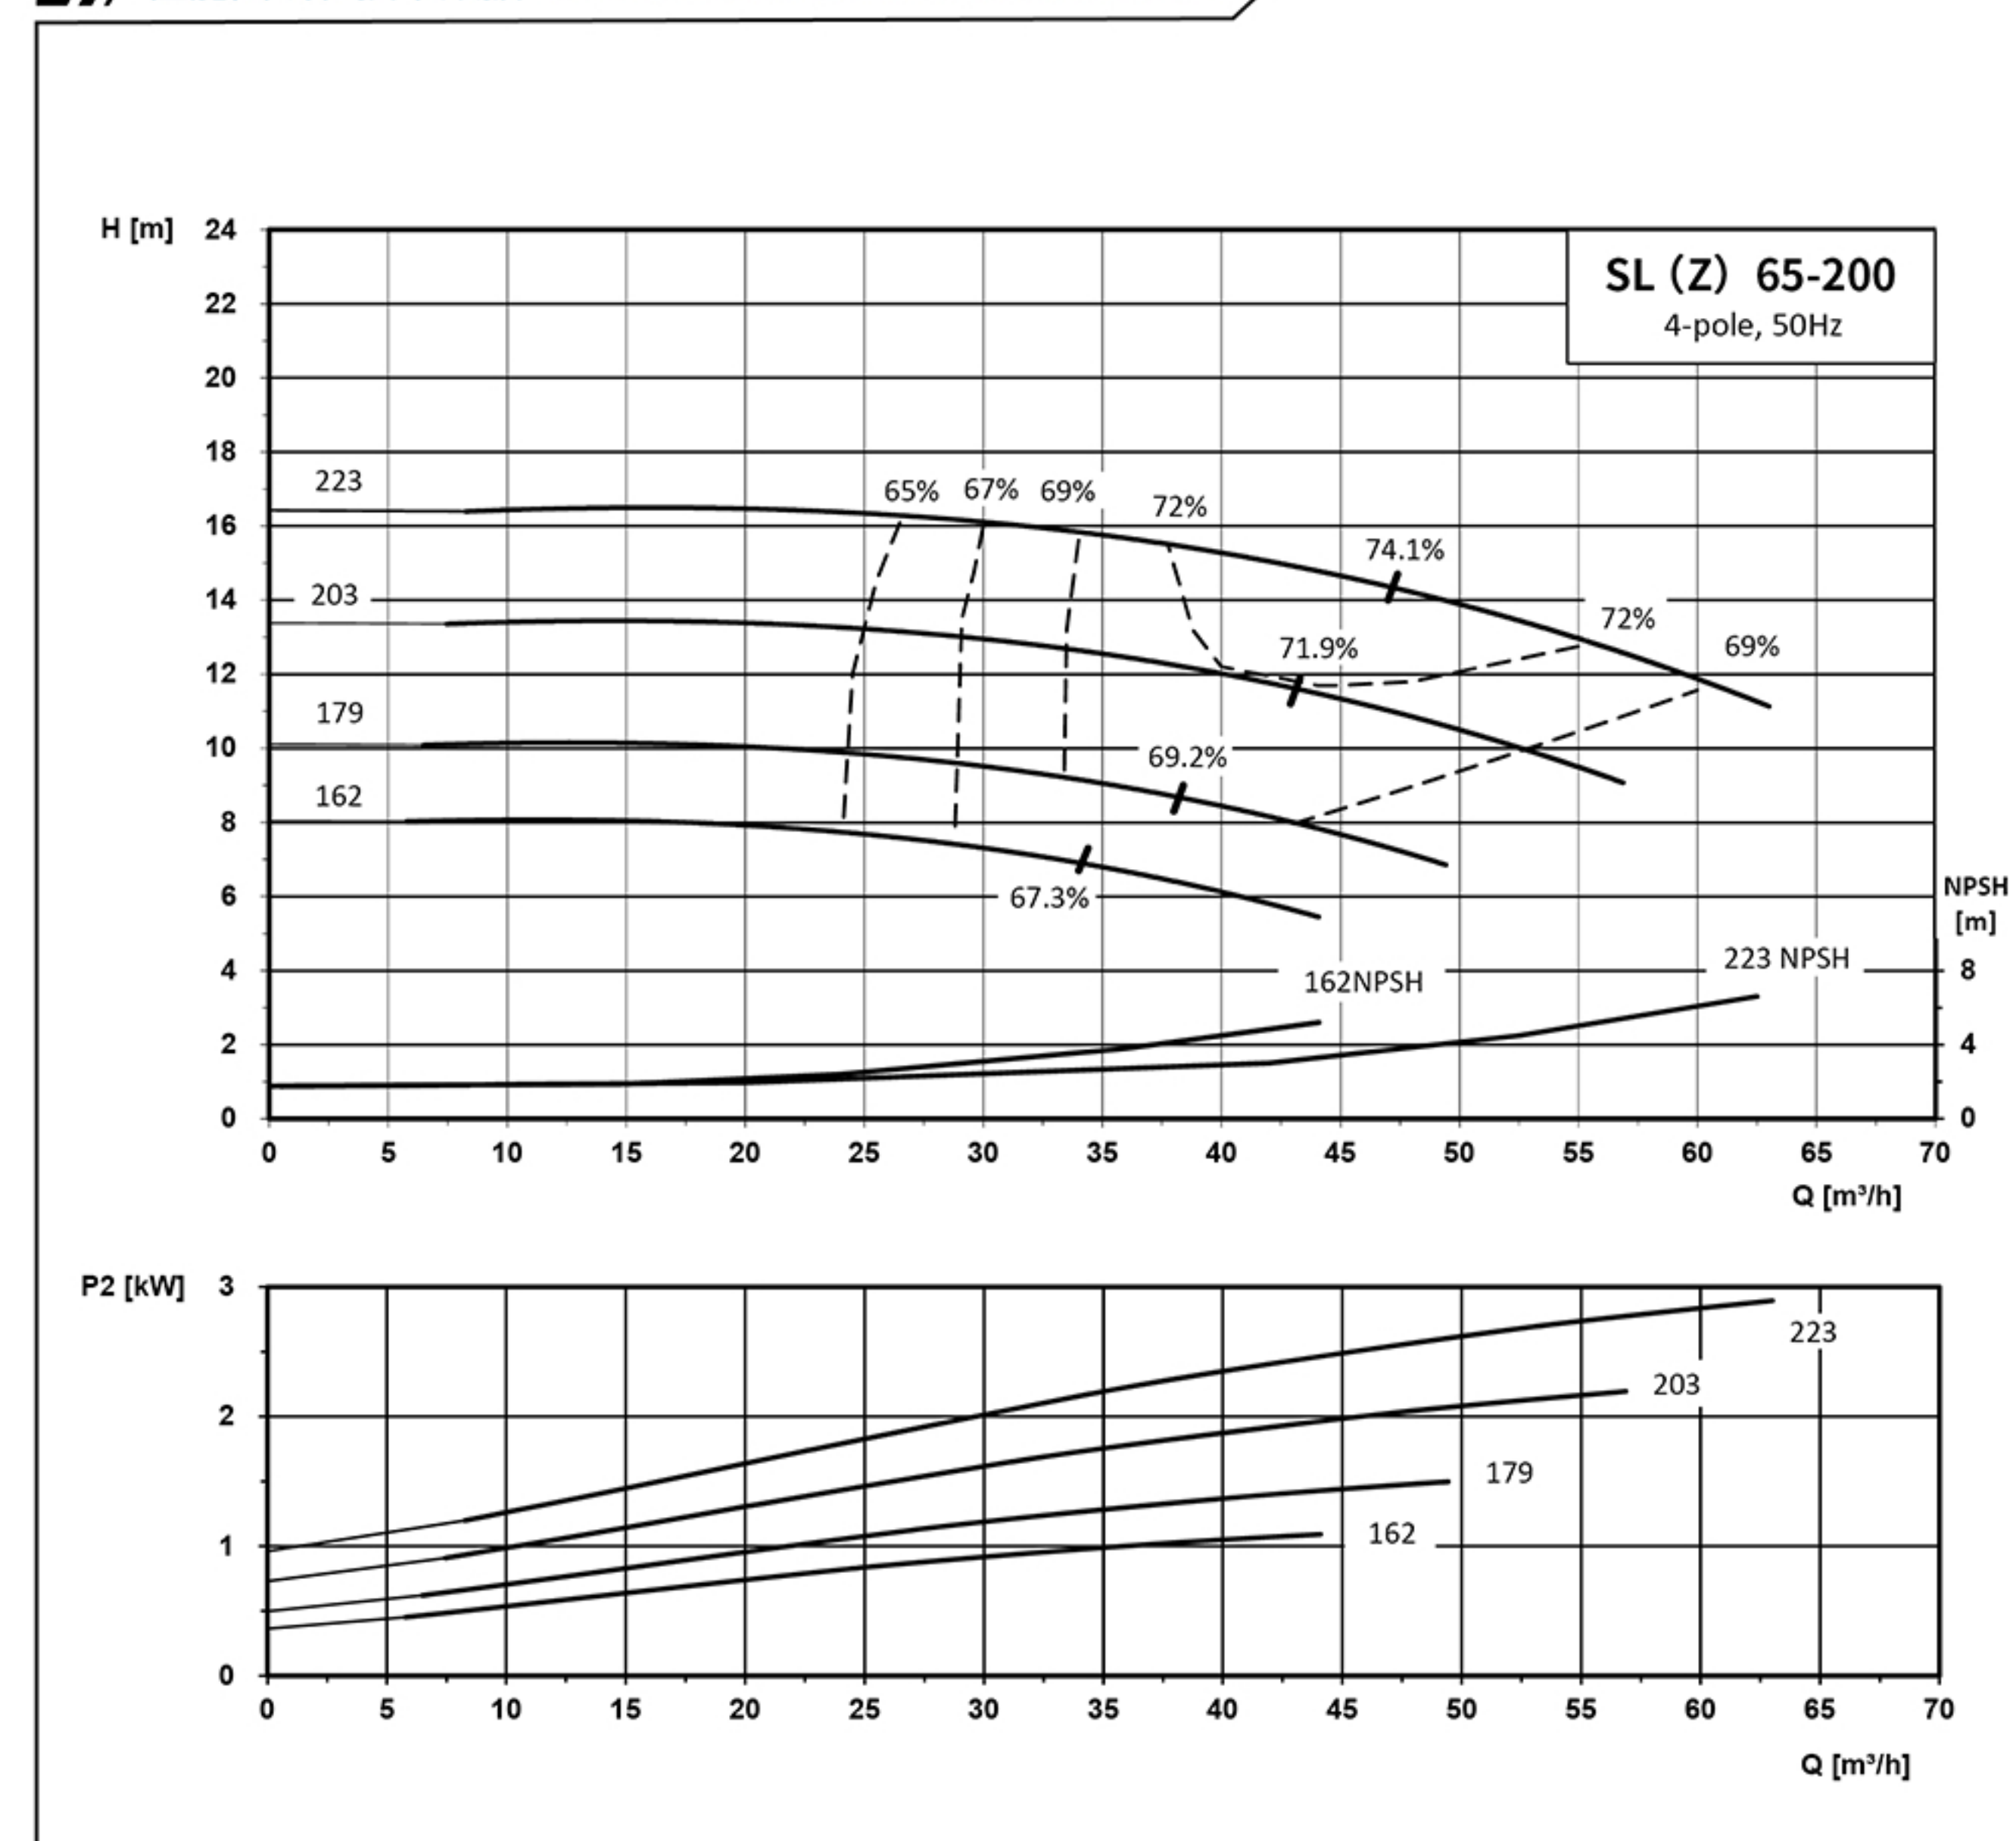


泵型号	Pump Model	SL65-200-1.1-4	SL65-200-1.5-4	SL(Z)65-200-2.2-4	SL(Z)65-200-3-4
电机型号	Motor Model	YE3-90S-4	YE3-90L-4	YE3-100L1-4	YE3-100L2-4
电机功率(kW)	Motor Power(kW)	1.1	1.5	2.2	3
叶轮直径(mm)	Impeller Diameter(mm)	162	179	203	223

SL(Z) 80-200

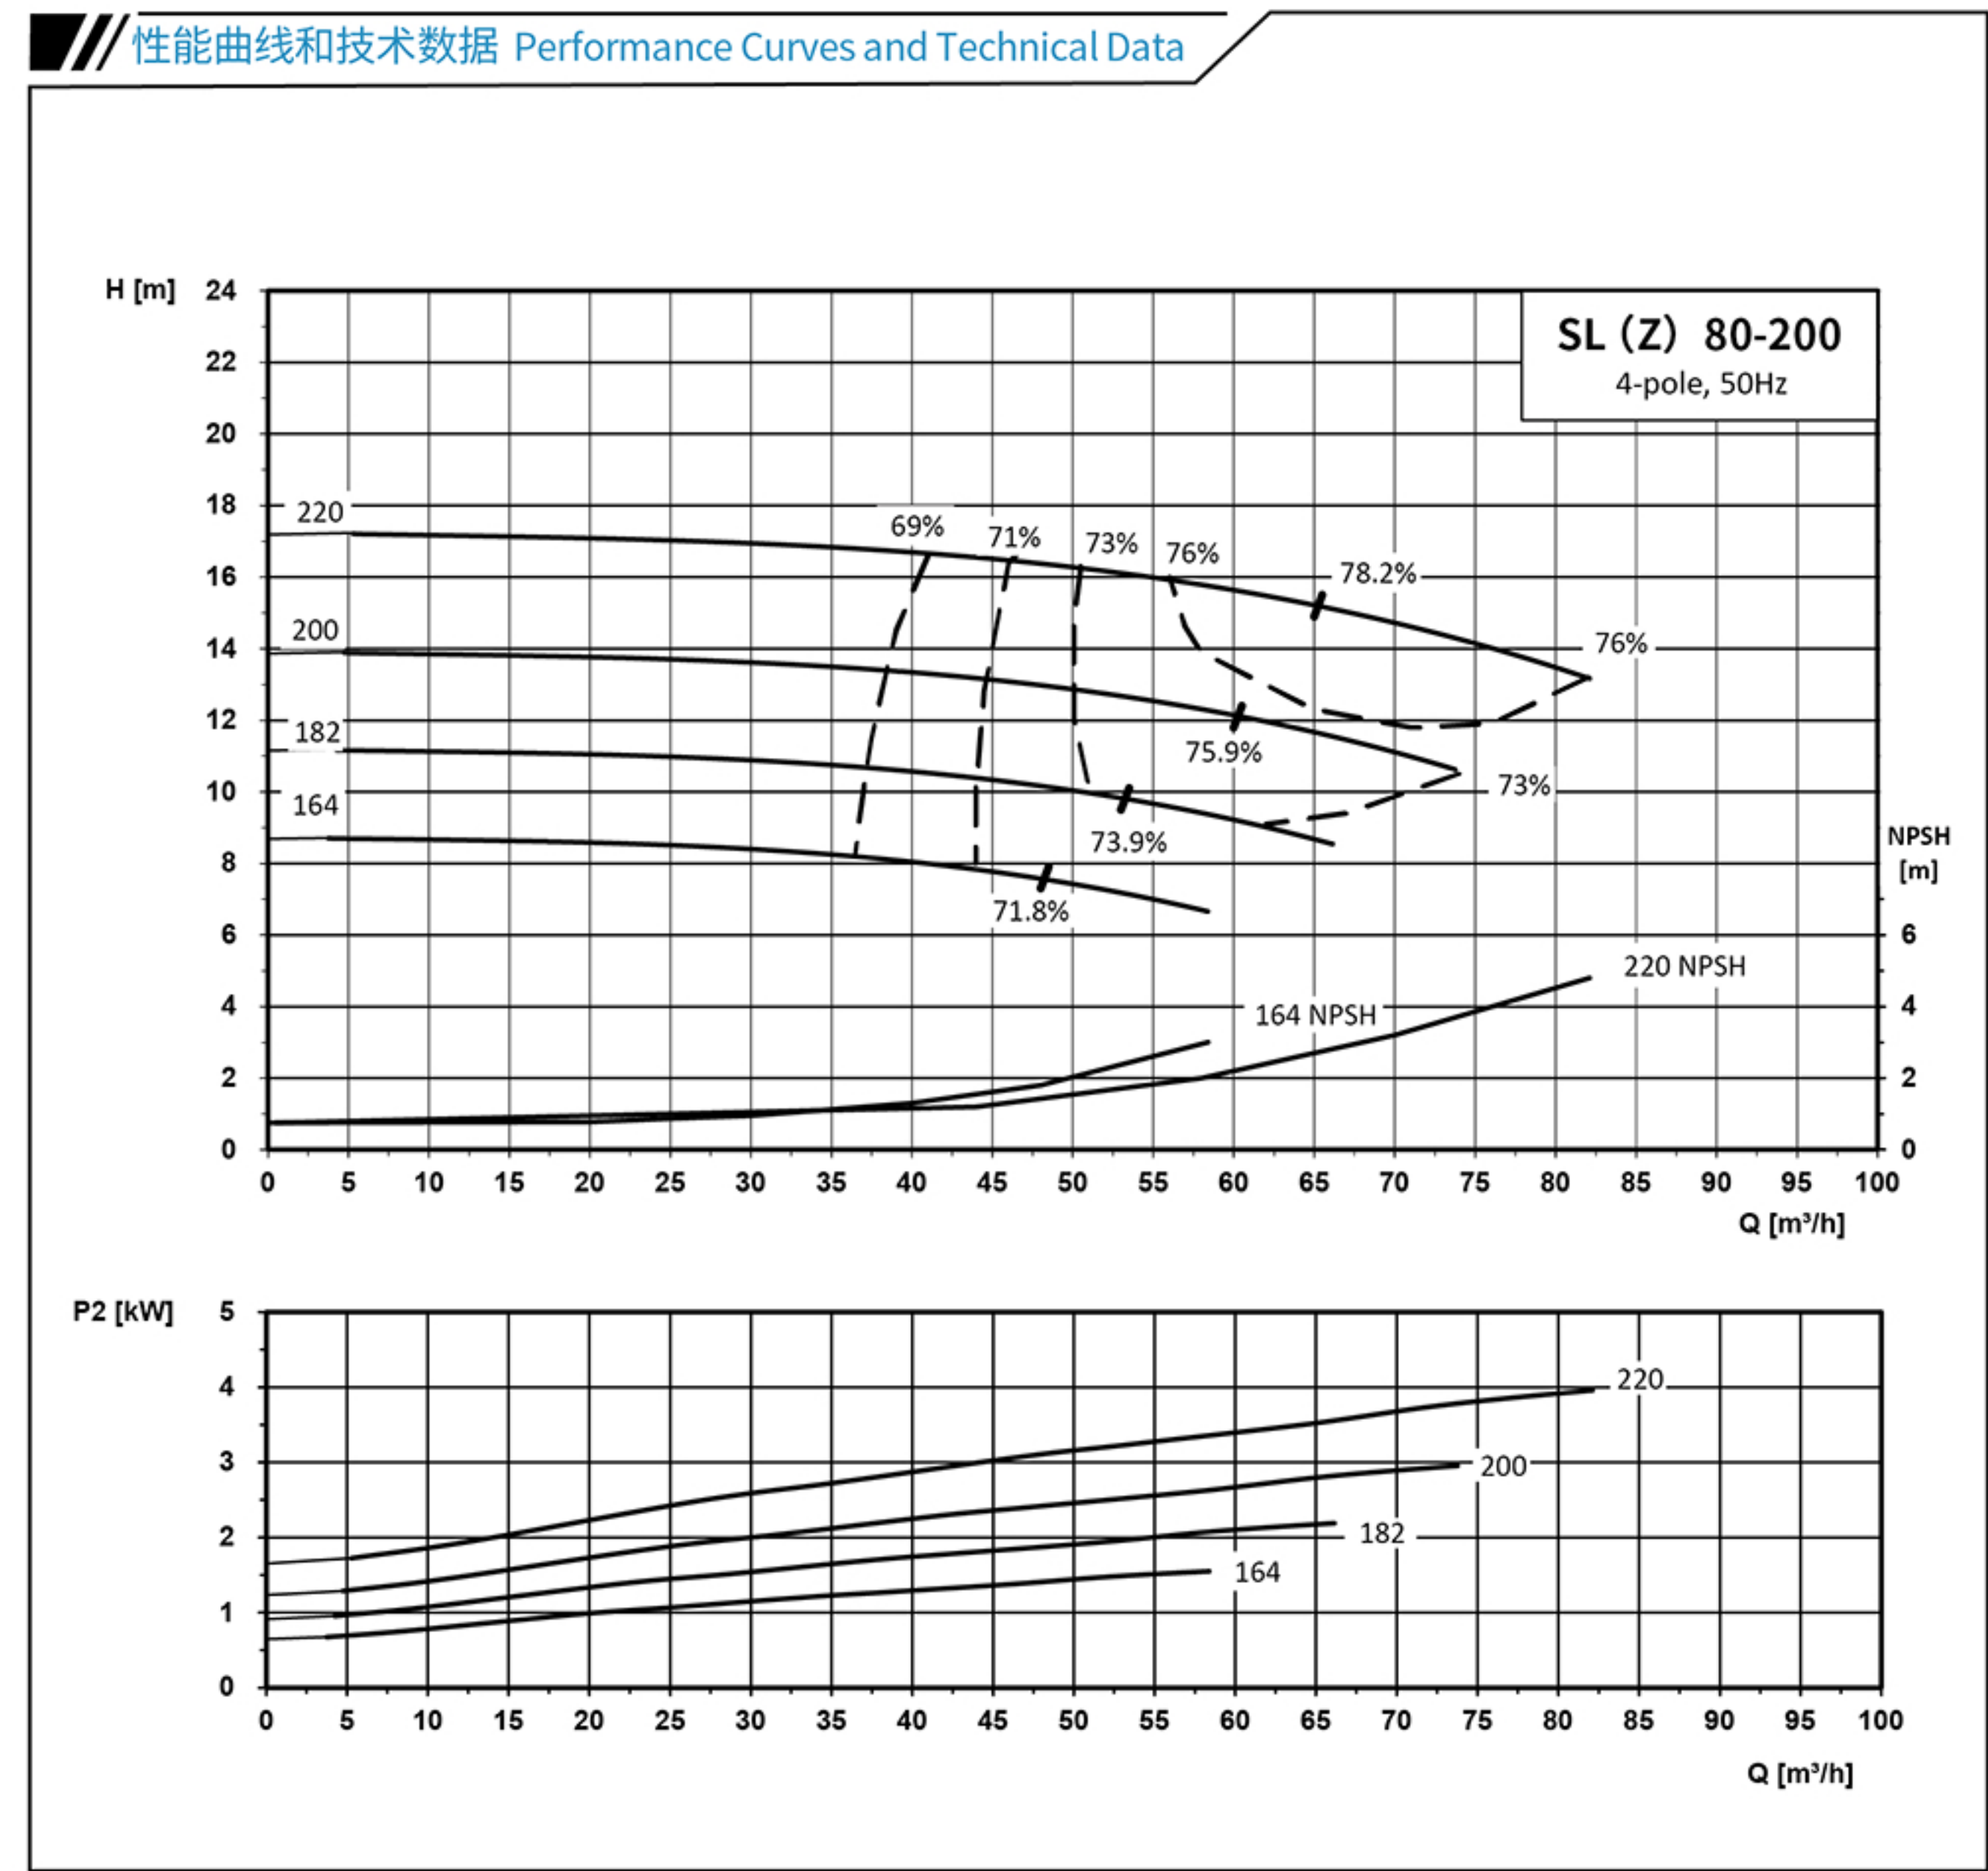

泵型号	Pump Model	SL80-200-1.5-4	SL(Z)80-200-2.2-4	SL(Z)80-200-3-4	SL(Z)80-200-4-4
电机型号	Motor Model	YE3-90L-4	YE3-100L1-4	YE3-100L2-4	YE3-112M-4
电机功率(kW)	Motor Power(kW)	1.5	2.2	3	4
叶轮直径(mm)	Impeller Diameter(mm)	164	182	200	220


SL(Z) 100-200

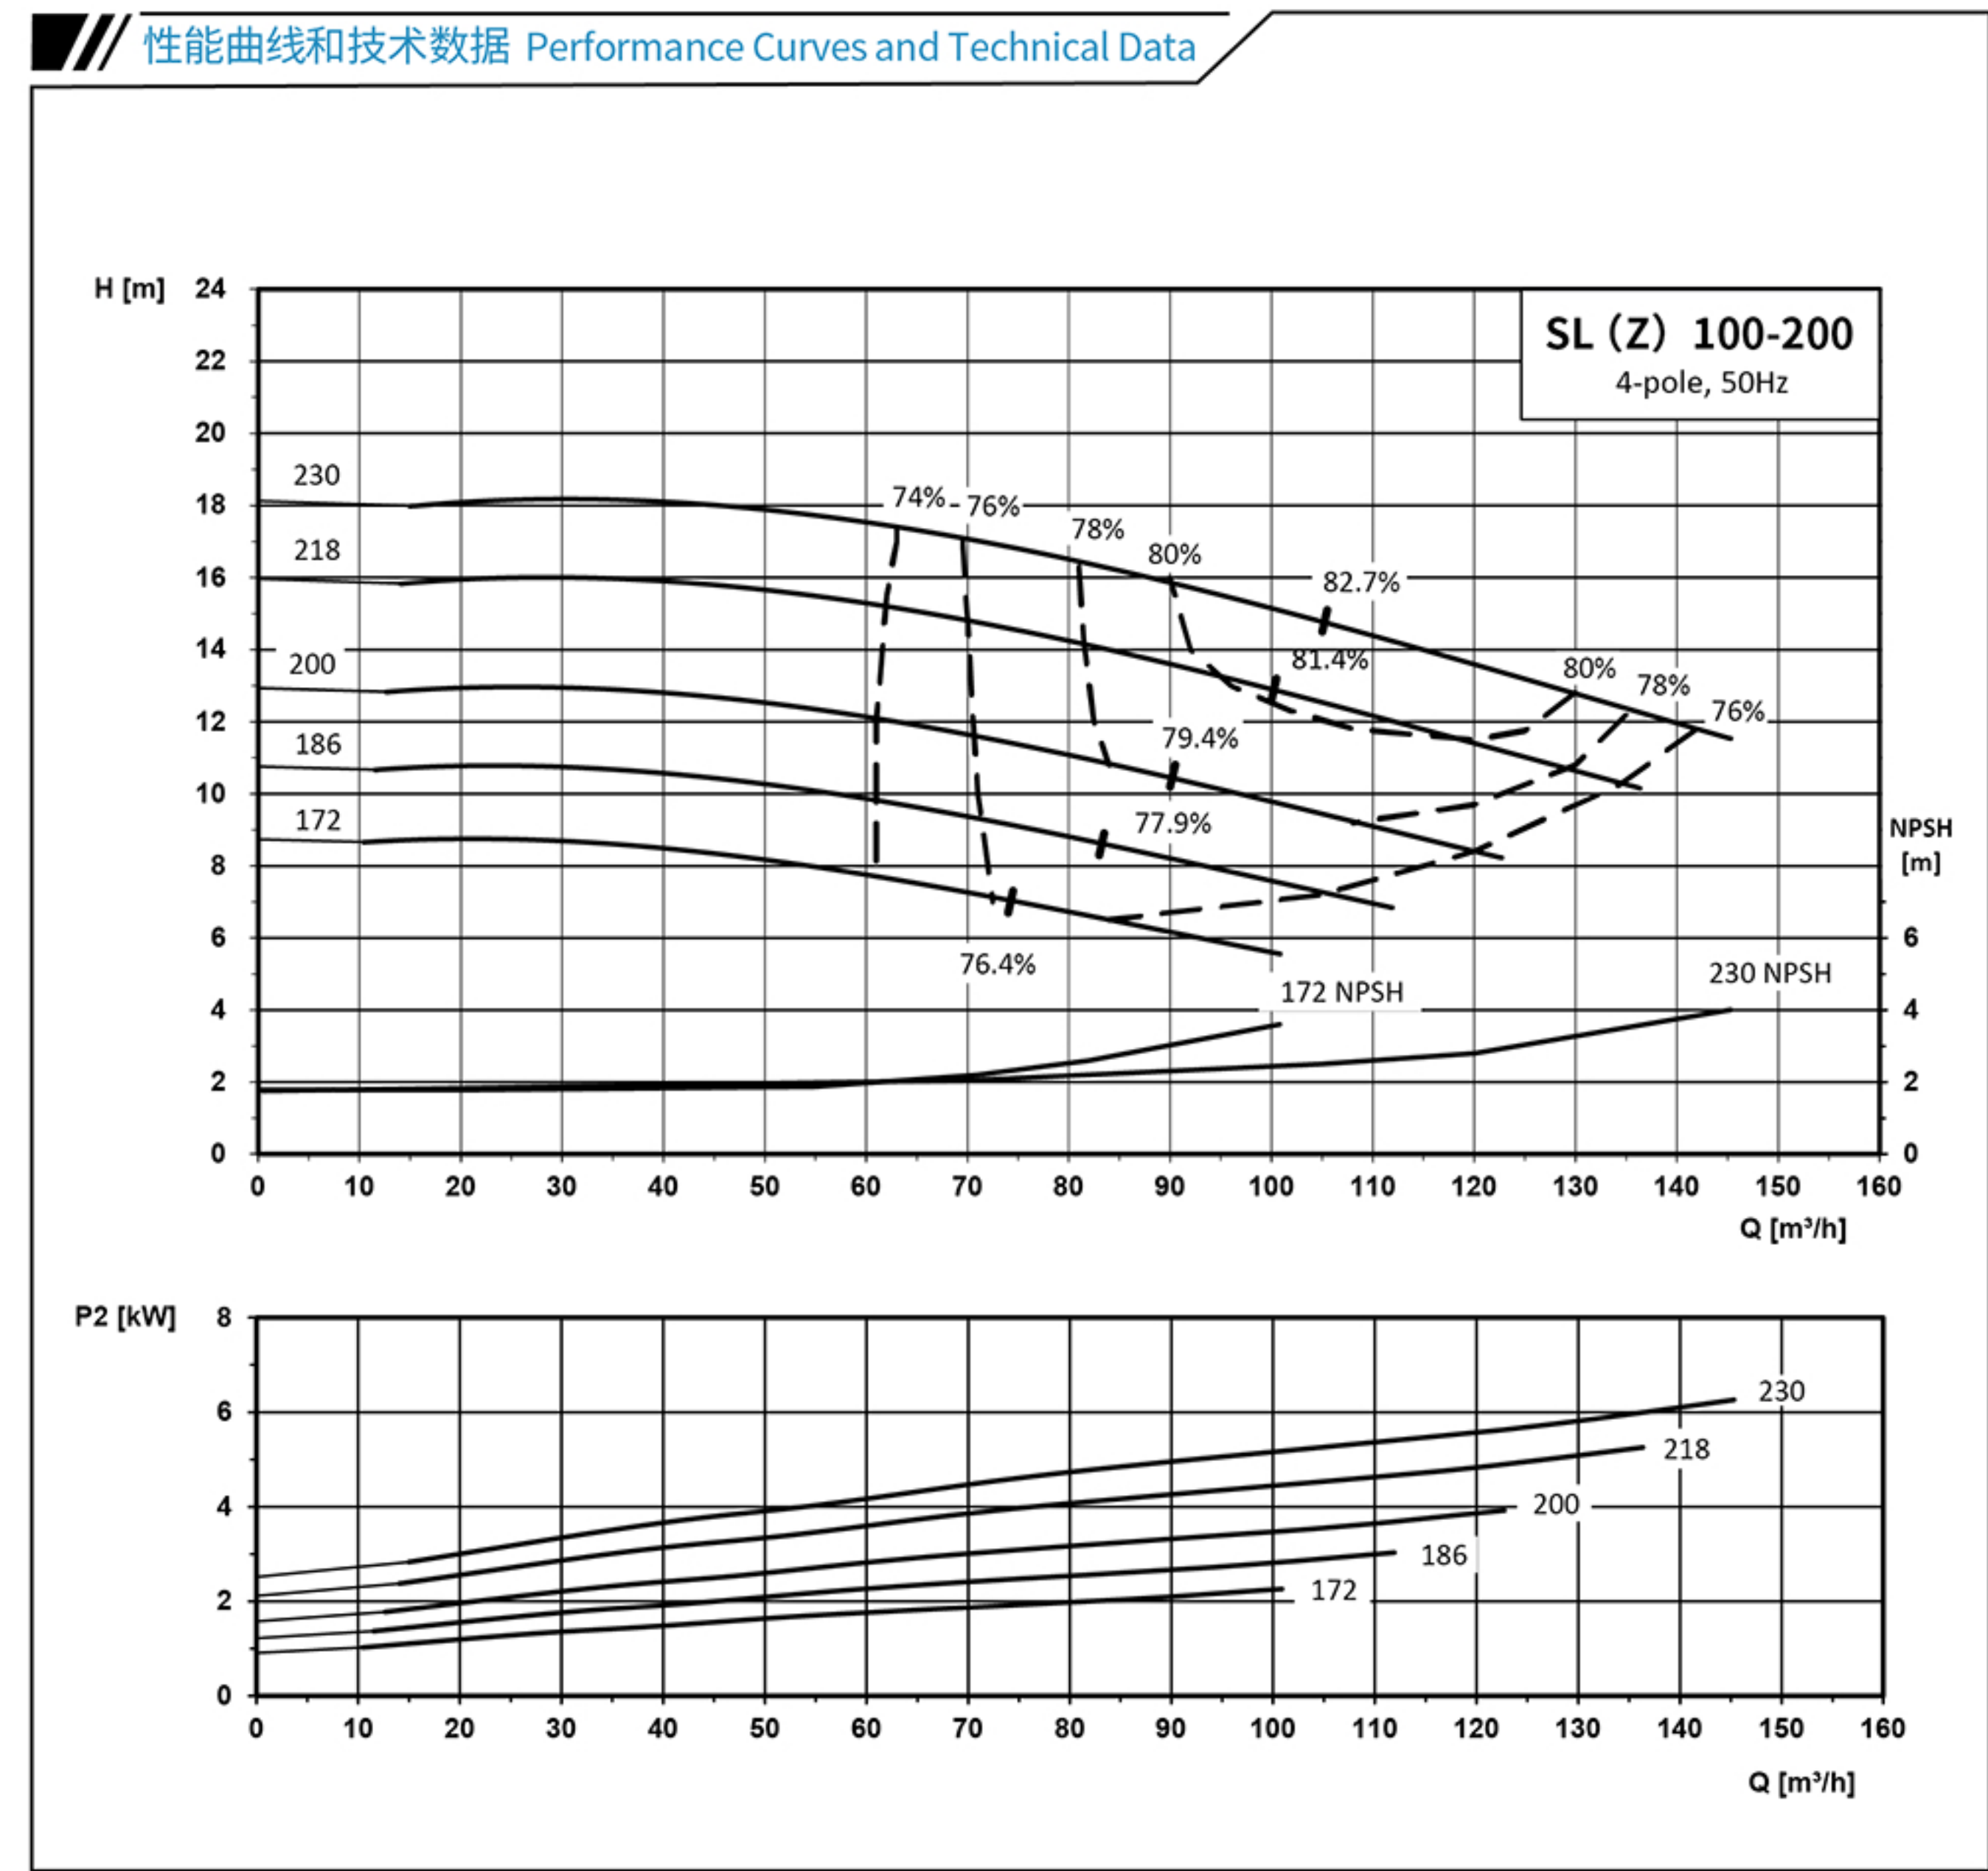

泵型号	Pump Model	SL100-200-2.2-4	SL100-200-3-4	SL100-200-4-4	SL(Z)100-200-5.5-4	SL(Z)100-200-7.5-4
电机型号	Motor Model	YE3-100L1-4	YE3-100L2-4	YE3-112M-4	YE3-132S-4	YE3-132M-4
电机功率(kW)	Motor Power(kW)	2.2	3	4	5.5	7.5
叶轮直径(mm)	Impeller Diameter(mm)	172	186	200	218	230

SL(Z) 125-200


性能曲线和技术数据 Performance Curves and Technical Data

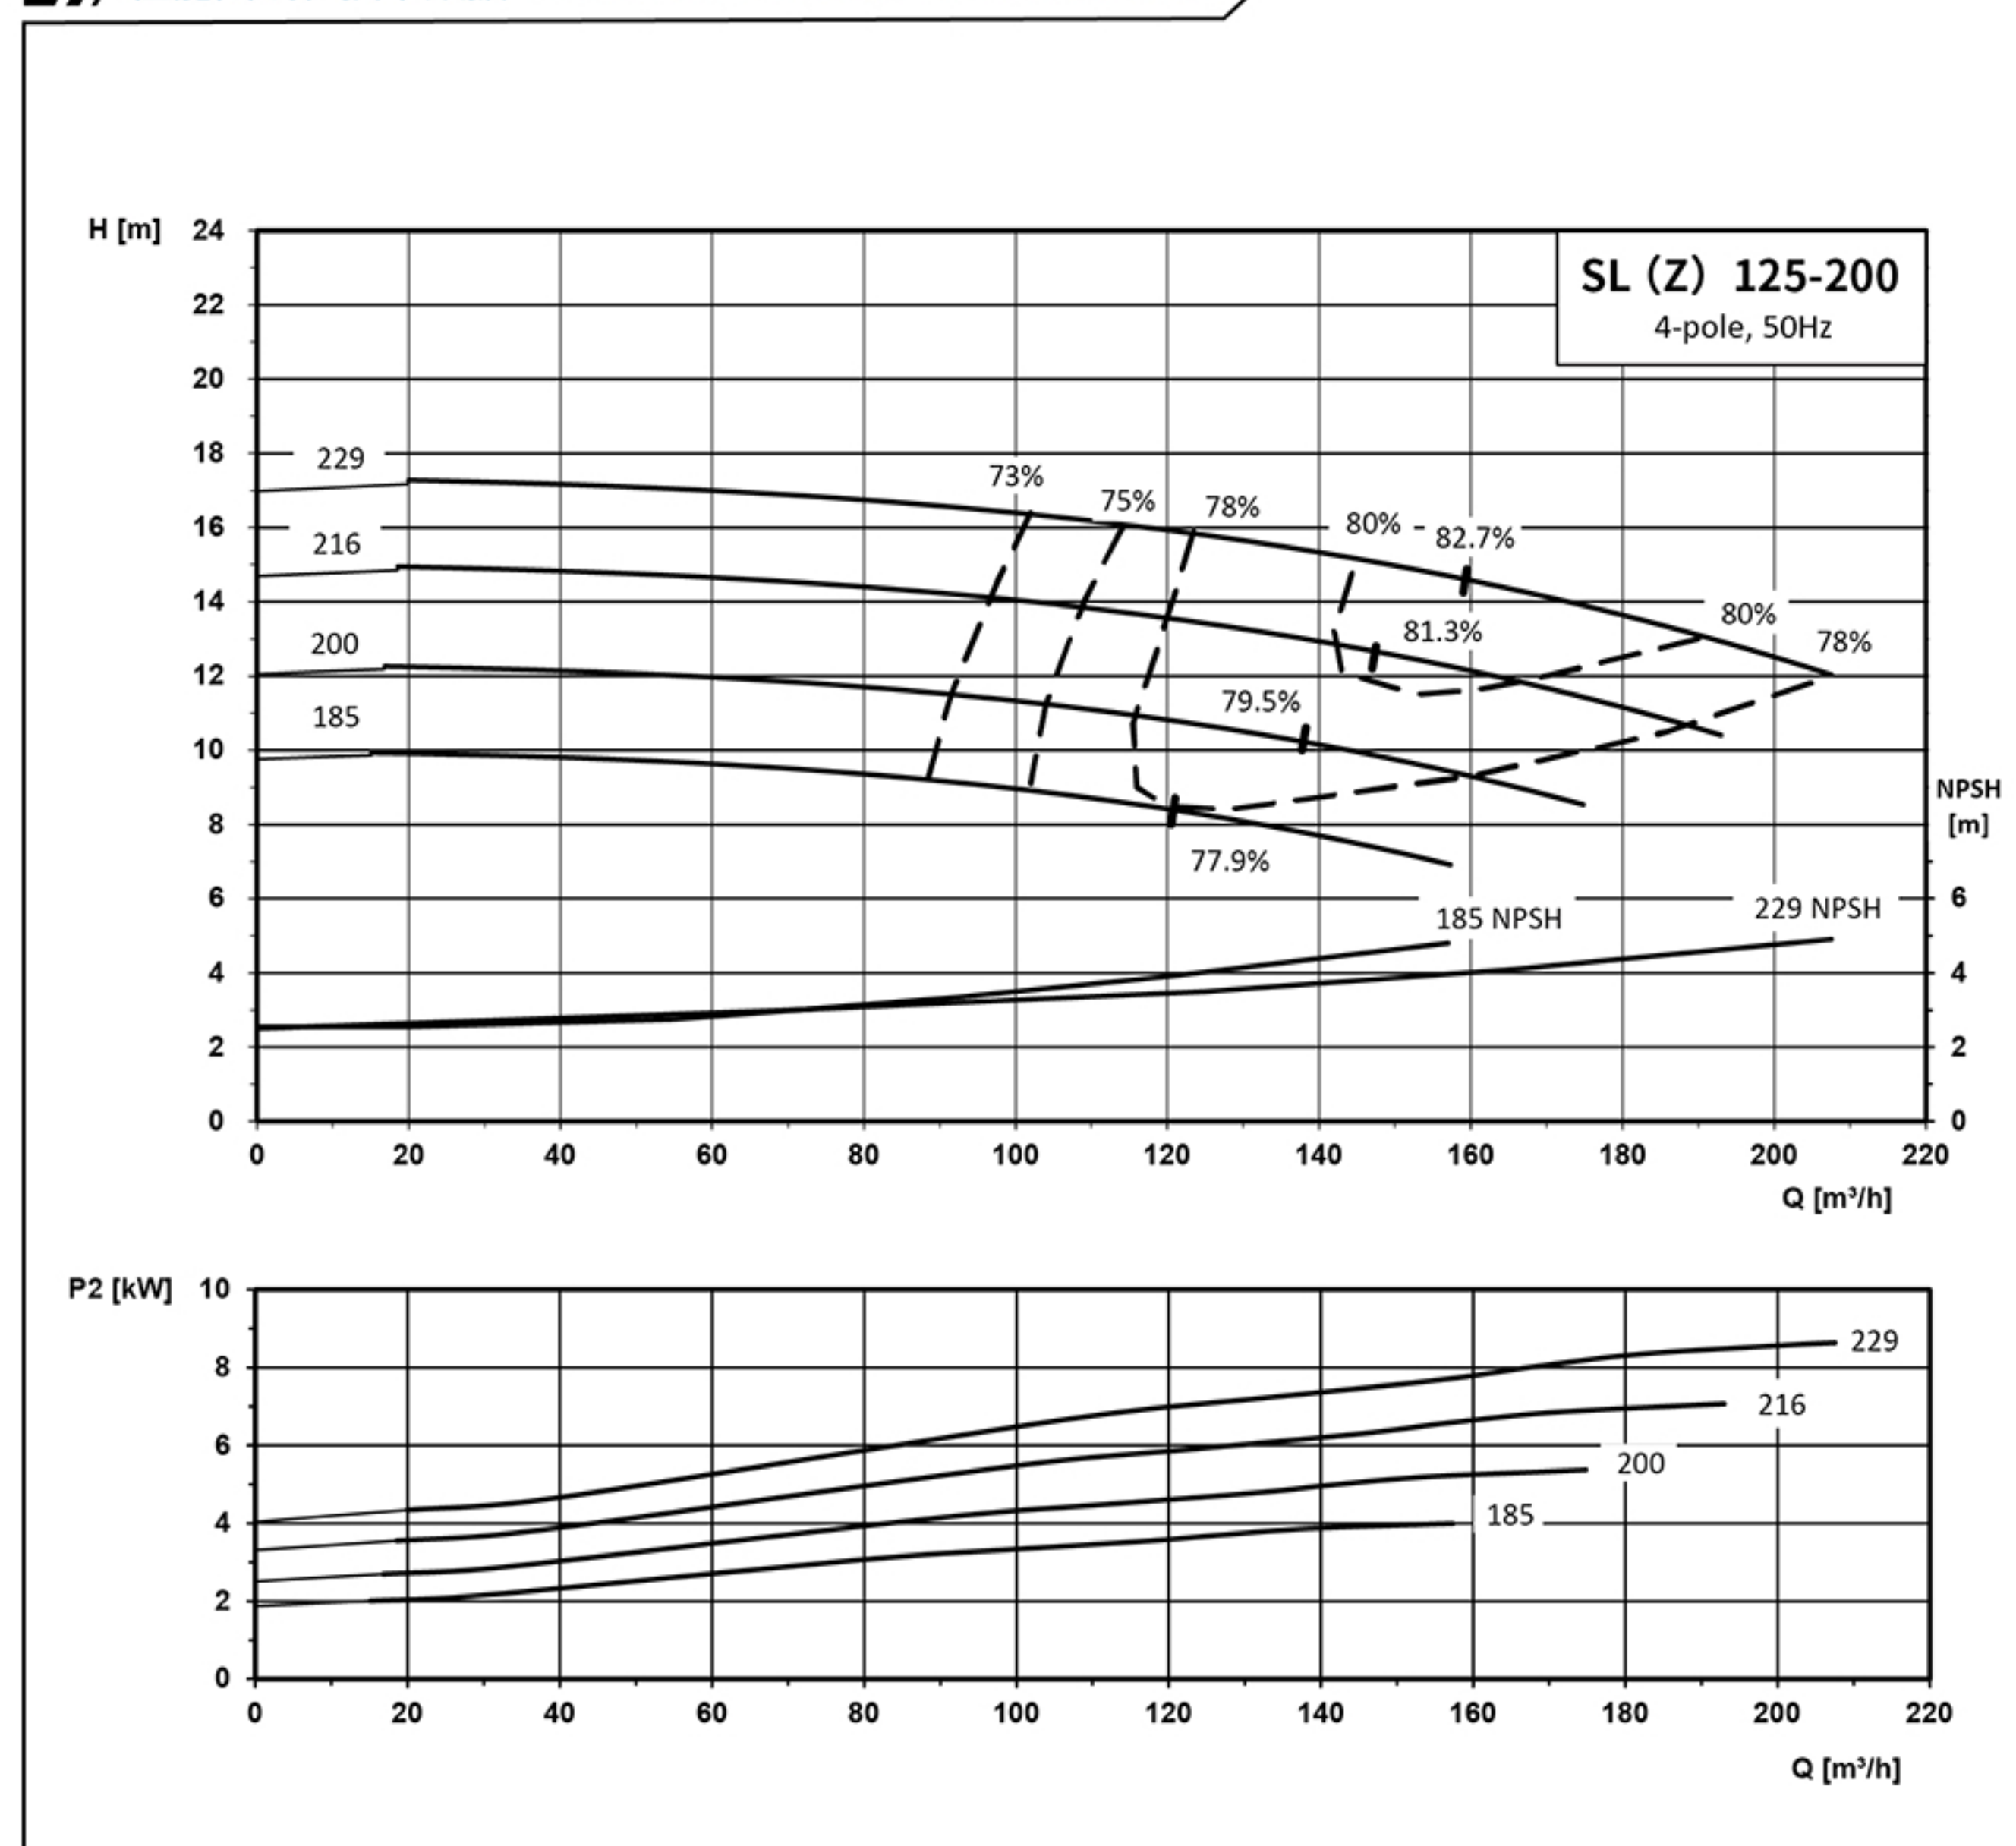

泵型号	Pump Model	SL125-200-4-4	SL(Z)125-200-5.5-4	SL(Z)125-200-7.5-4	SL(Z)125-200-9.2-4
电机型号	Motor Model	YE3-112M-4	YE3-132S-4	YE3-132M-4	YE3-132L-4
电机功率(kW)	Motor Power(kW)	4	5.5	7.5	9.2
叶轮直径(mm)	Impeller Diameter(mm)	185	200	216	229

SL(Z) 150-200


性能曲线和技术数据 Performance Curves and Technical Data

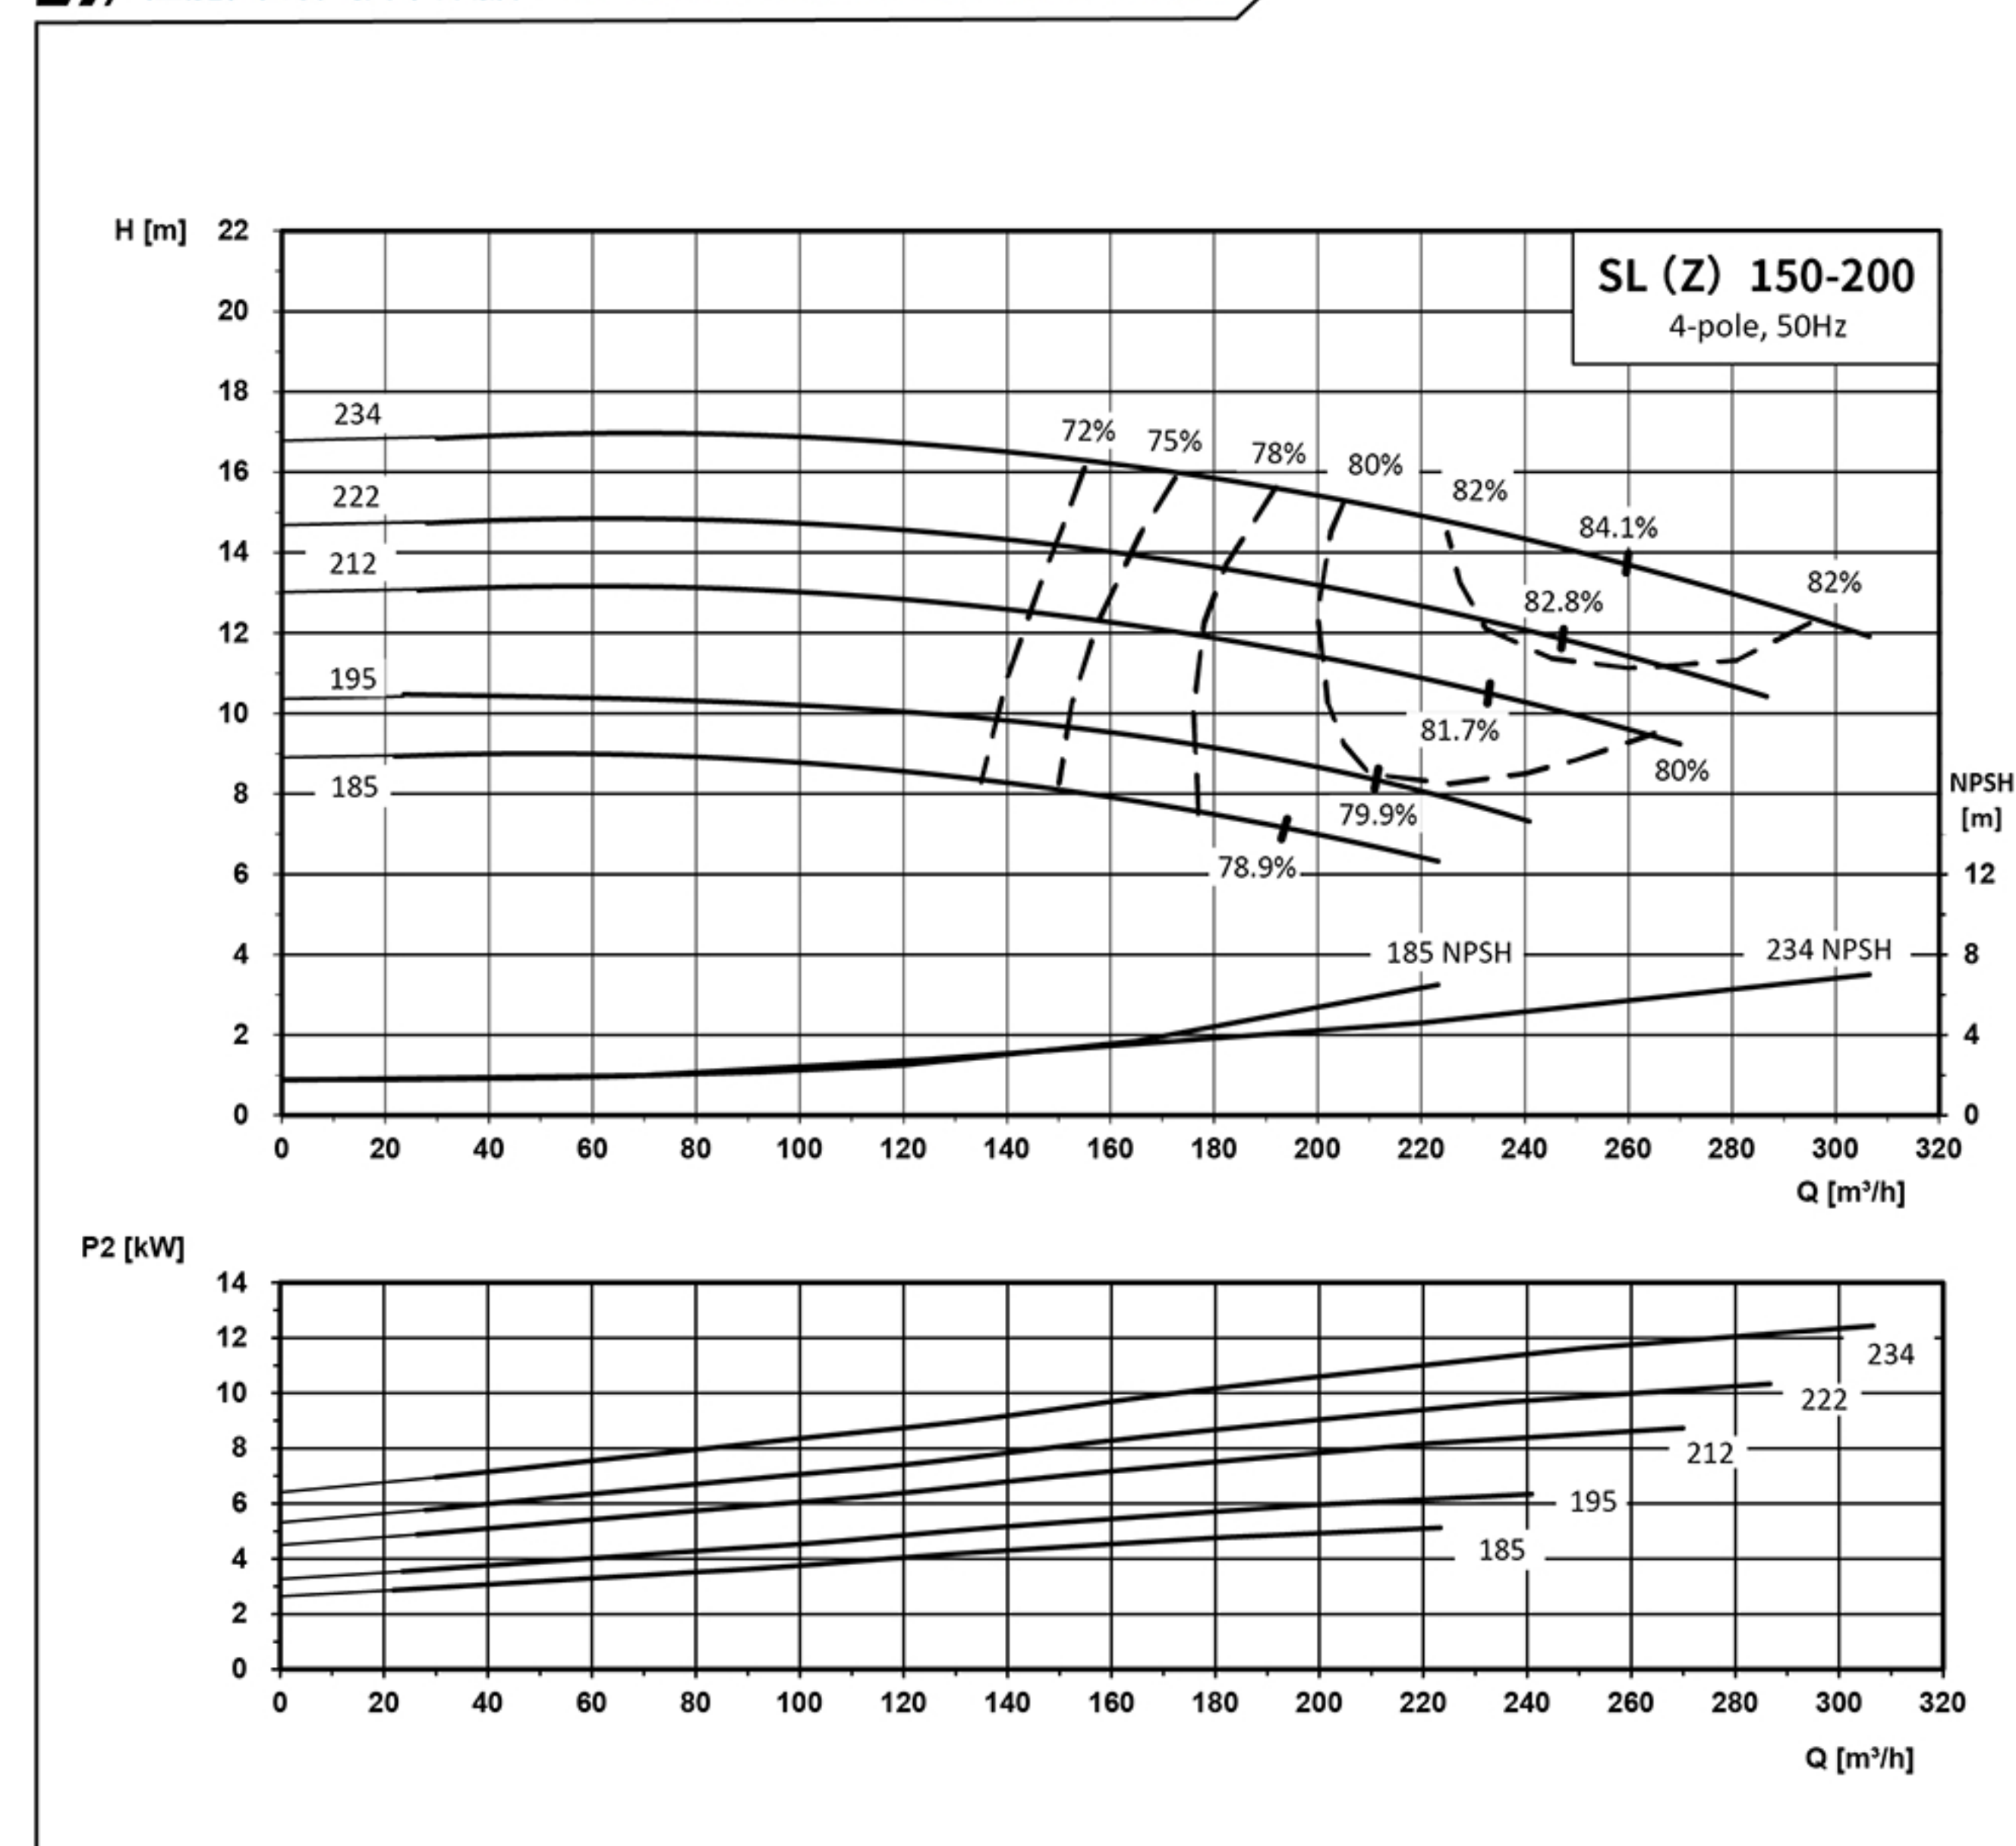

泵型号	Pump Model	SL(Z)150-200-5.5-4	SL(Z)150-200-7.5-4	SL(Z)150-200-9.2-4	SL(Z)150-200-11-4	SL(Z)150-200-15-4
电机型号	Motor Model	YE3-132S-4	YE3-132M-4	YE3-132L-4	YE3-160M-4	YE3-160L-4
电机功率(kW)	Motor Power(kW)	5.5	7.5	9.2	11	15
叶轮直径(mm)	Impeller Diameter(mm)	185	195	212	222	234

SL(Z) 200-200


性能曲线和技术数据 Performance Curves and Technical Data

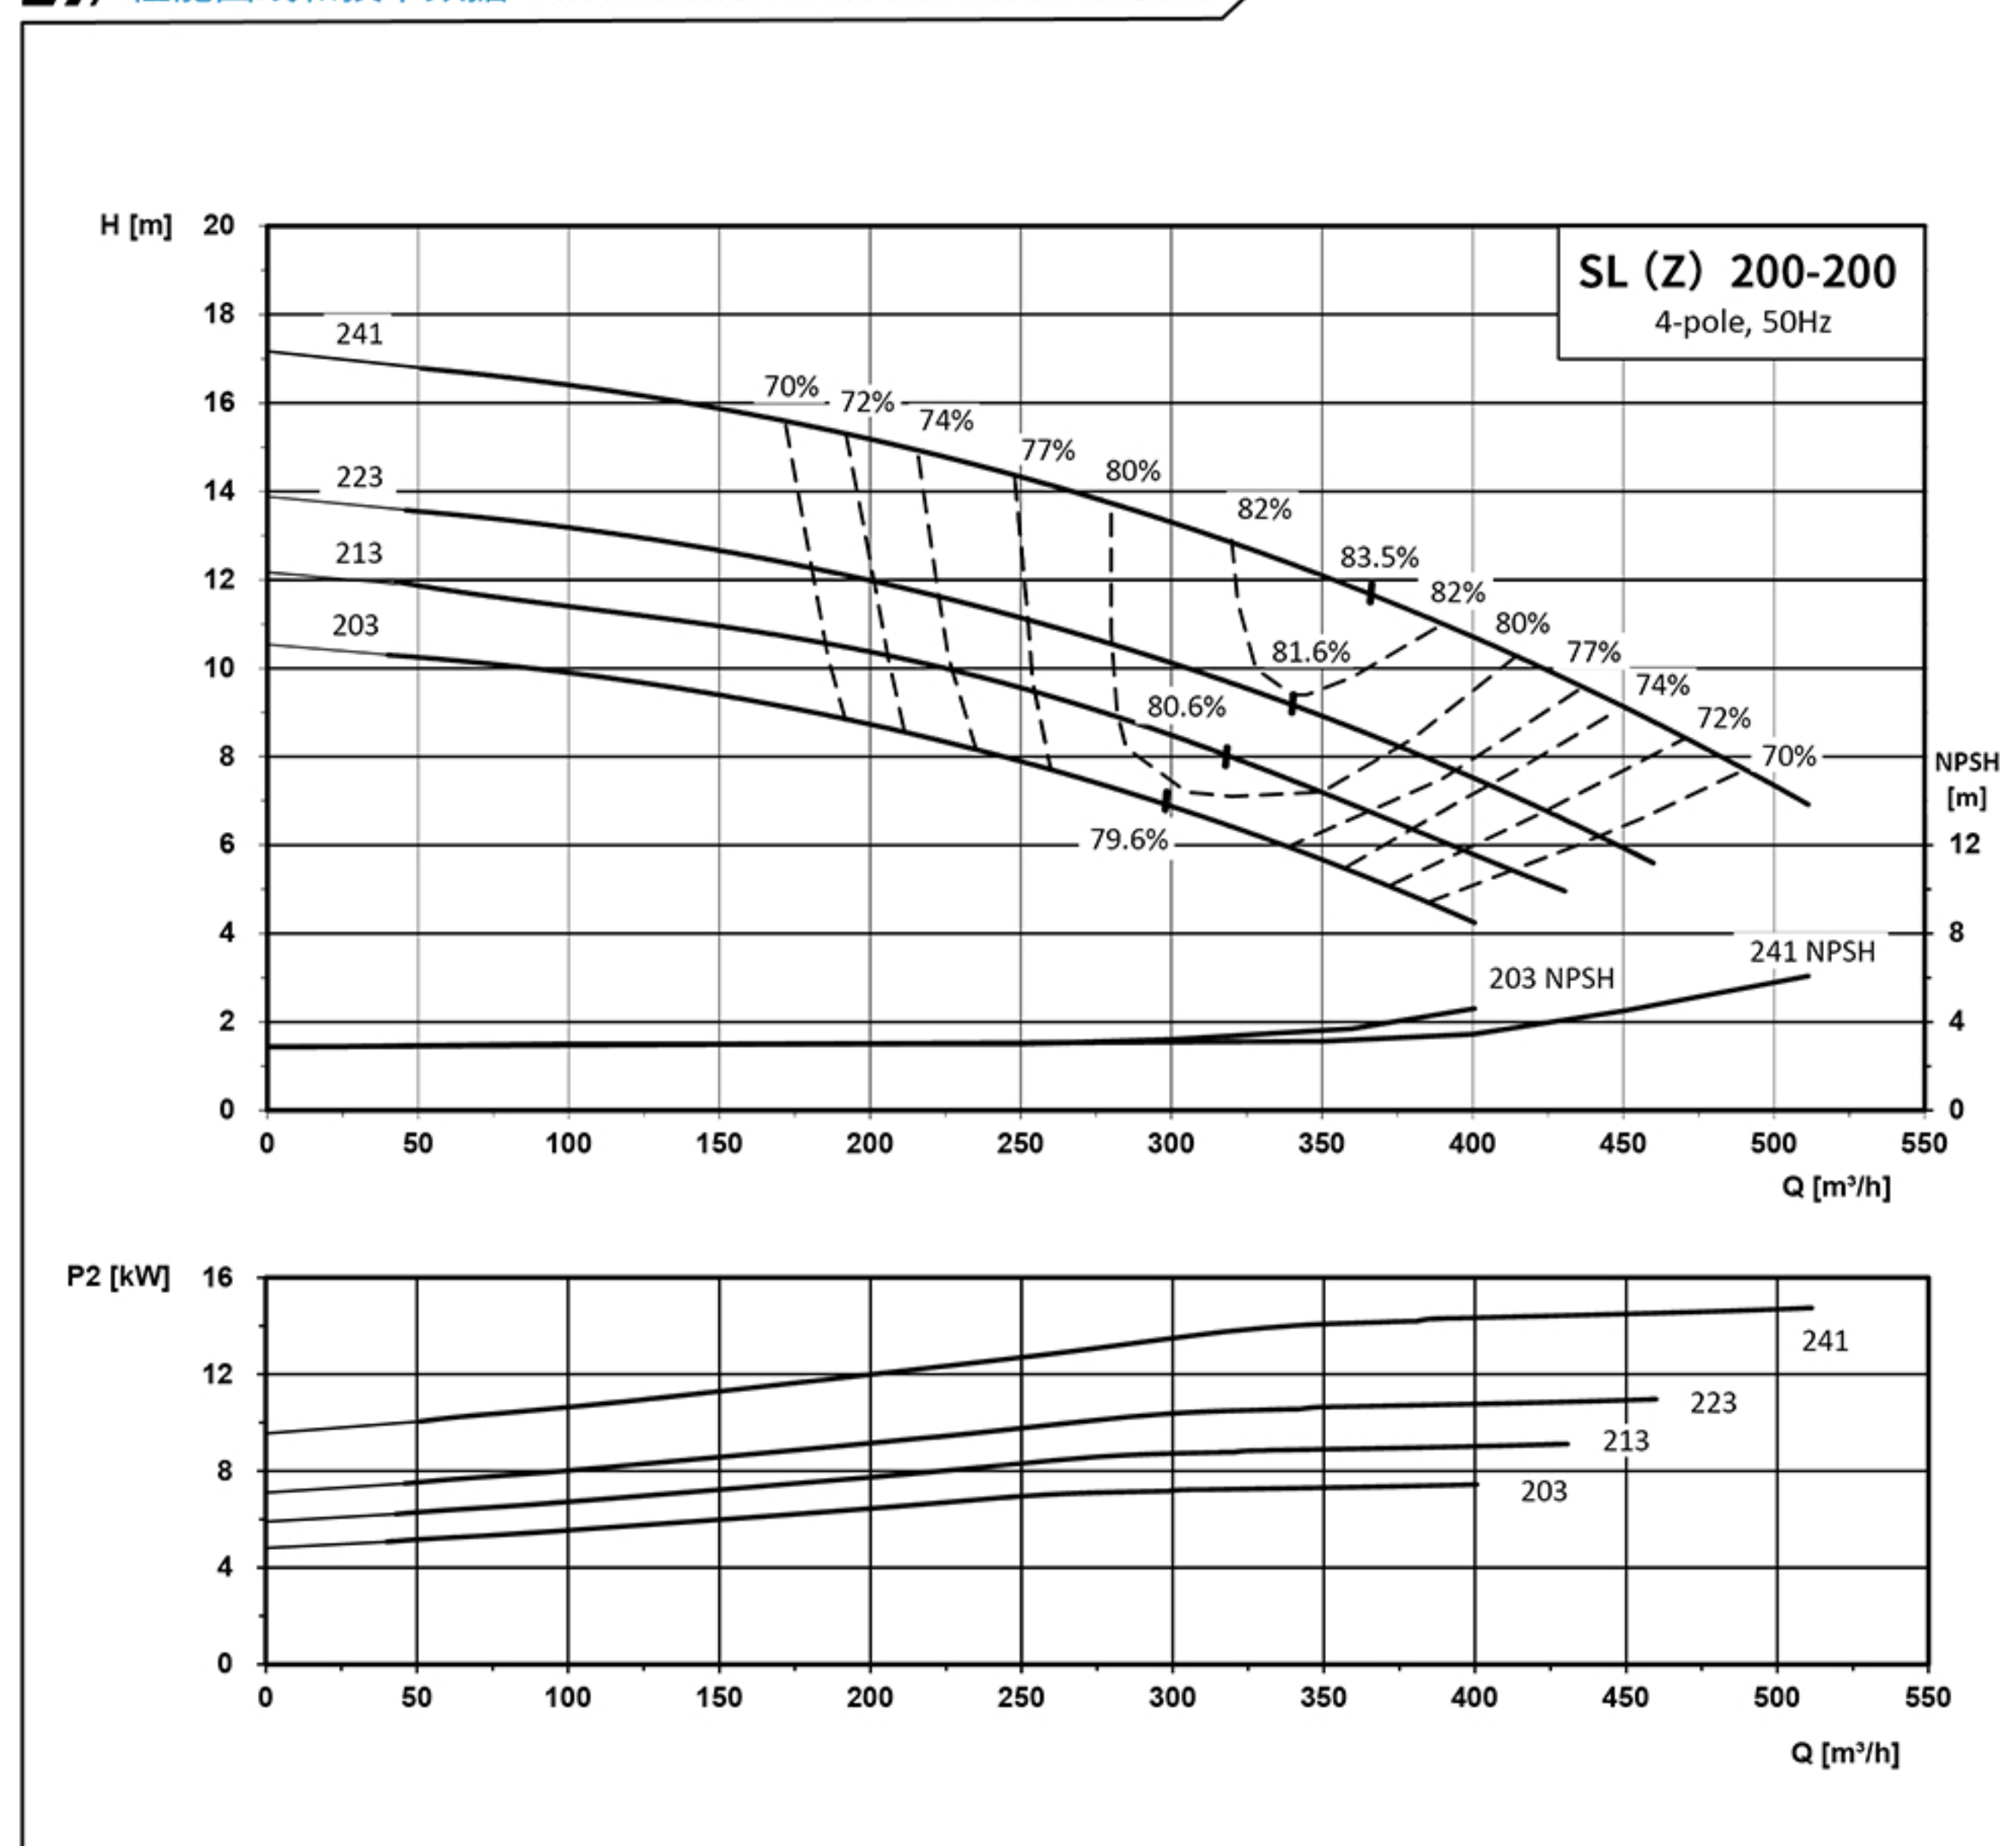

泵型号	Pump Model	SL(Z)200-200-7.5-4	SL(Z)200-200-9.2-4	SL(Z)200-200-11-4	SL(Z)200-200-15-4
电机型号	Motor Model	YE3-132M-4	YE3-132L-4	YE3-160M-4	YE3-160L-4
电机功率(kW)	Motor Power(kW)	7.5	9.2	11	15
叶轮直径(mm)	Impeller Diameter(mm)	203	213	223	241


SL 32-250

性能曲线和技术数据 Performance Curves and Technical Data

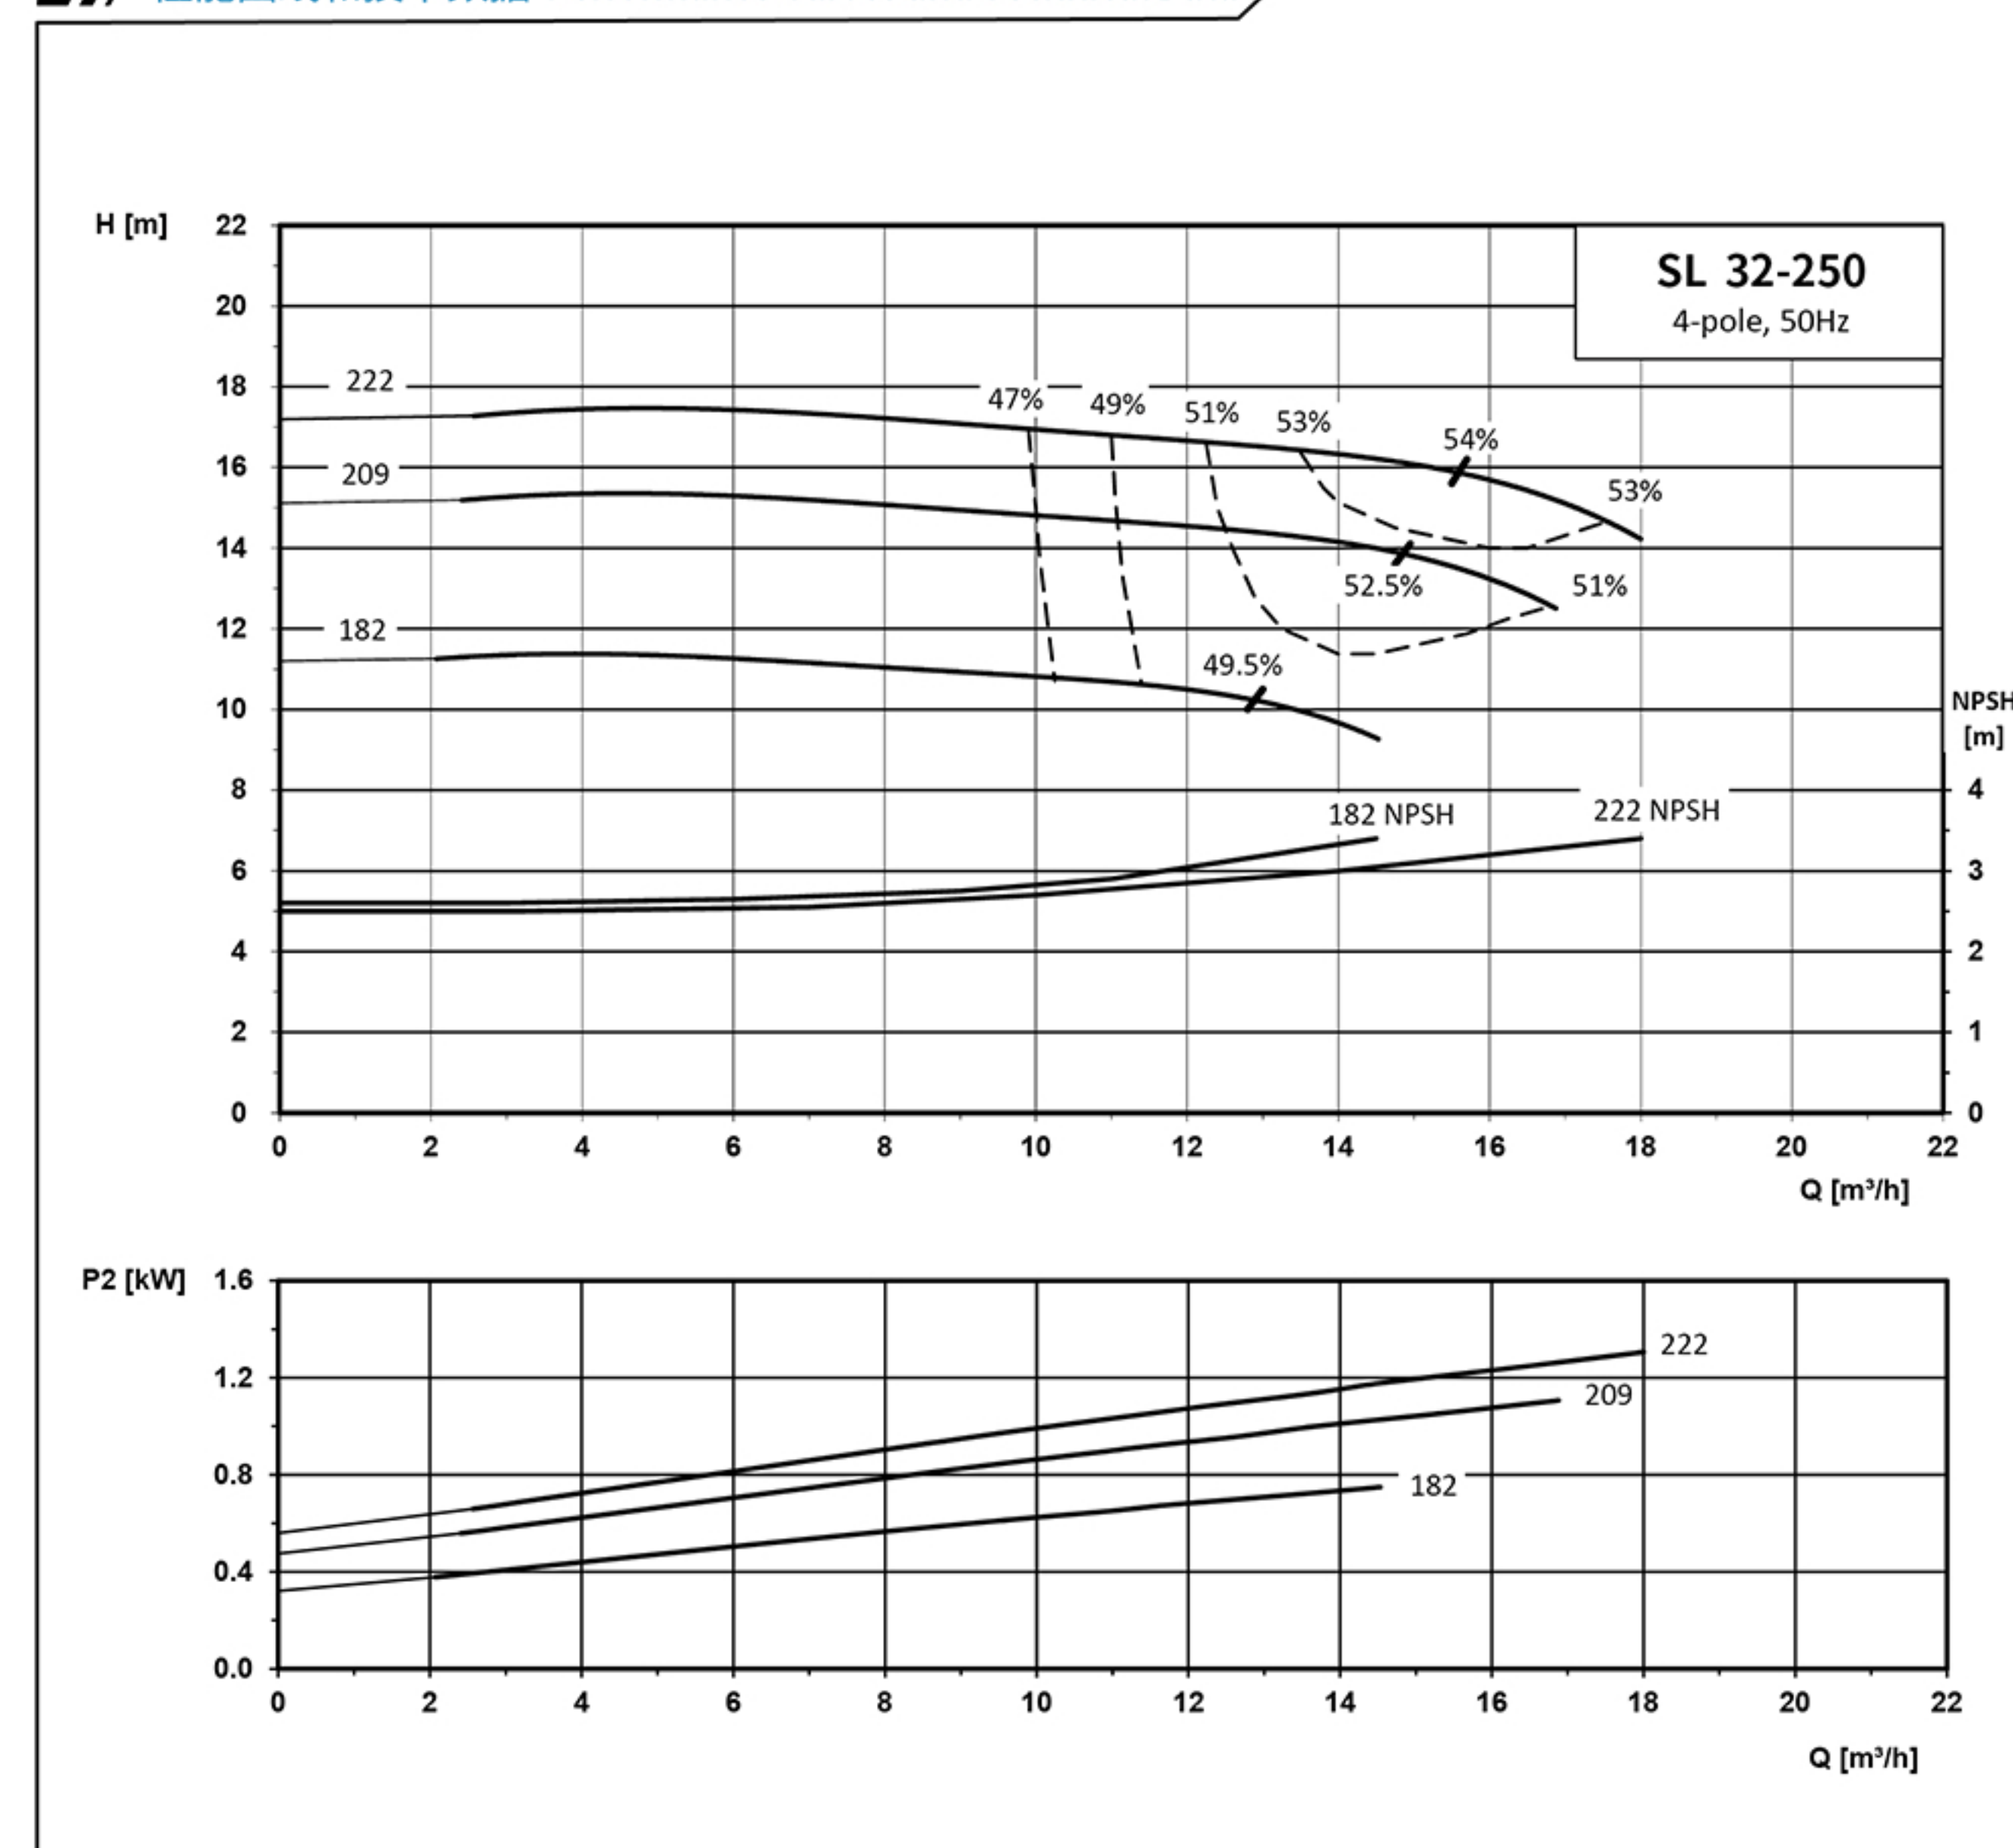


泵型号	Pump Model	SL32-250-0.75-4	SL32-250-1.1-4	SL32-250-1.5-4
电机型号	Motor Model	YE3-80M2-4	YE3-90S-4	YE3-90L-4
电机功率(kW)	Motor Power(kW)	0.75	1.1	1.5
叶轮直径(mm)	Impeller Diameter(mm)	182	209	222

SL (Z) 40-250

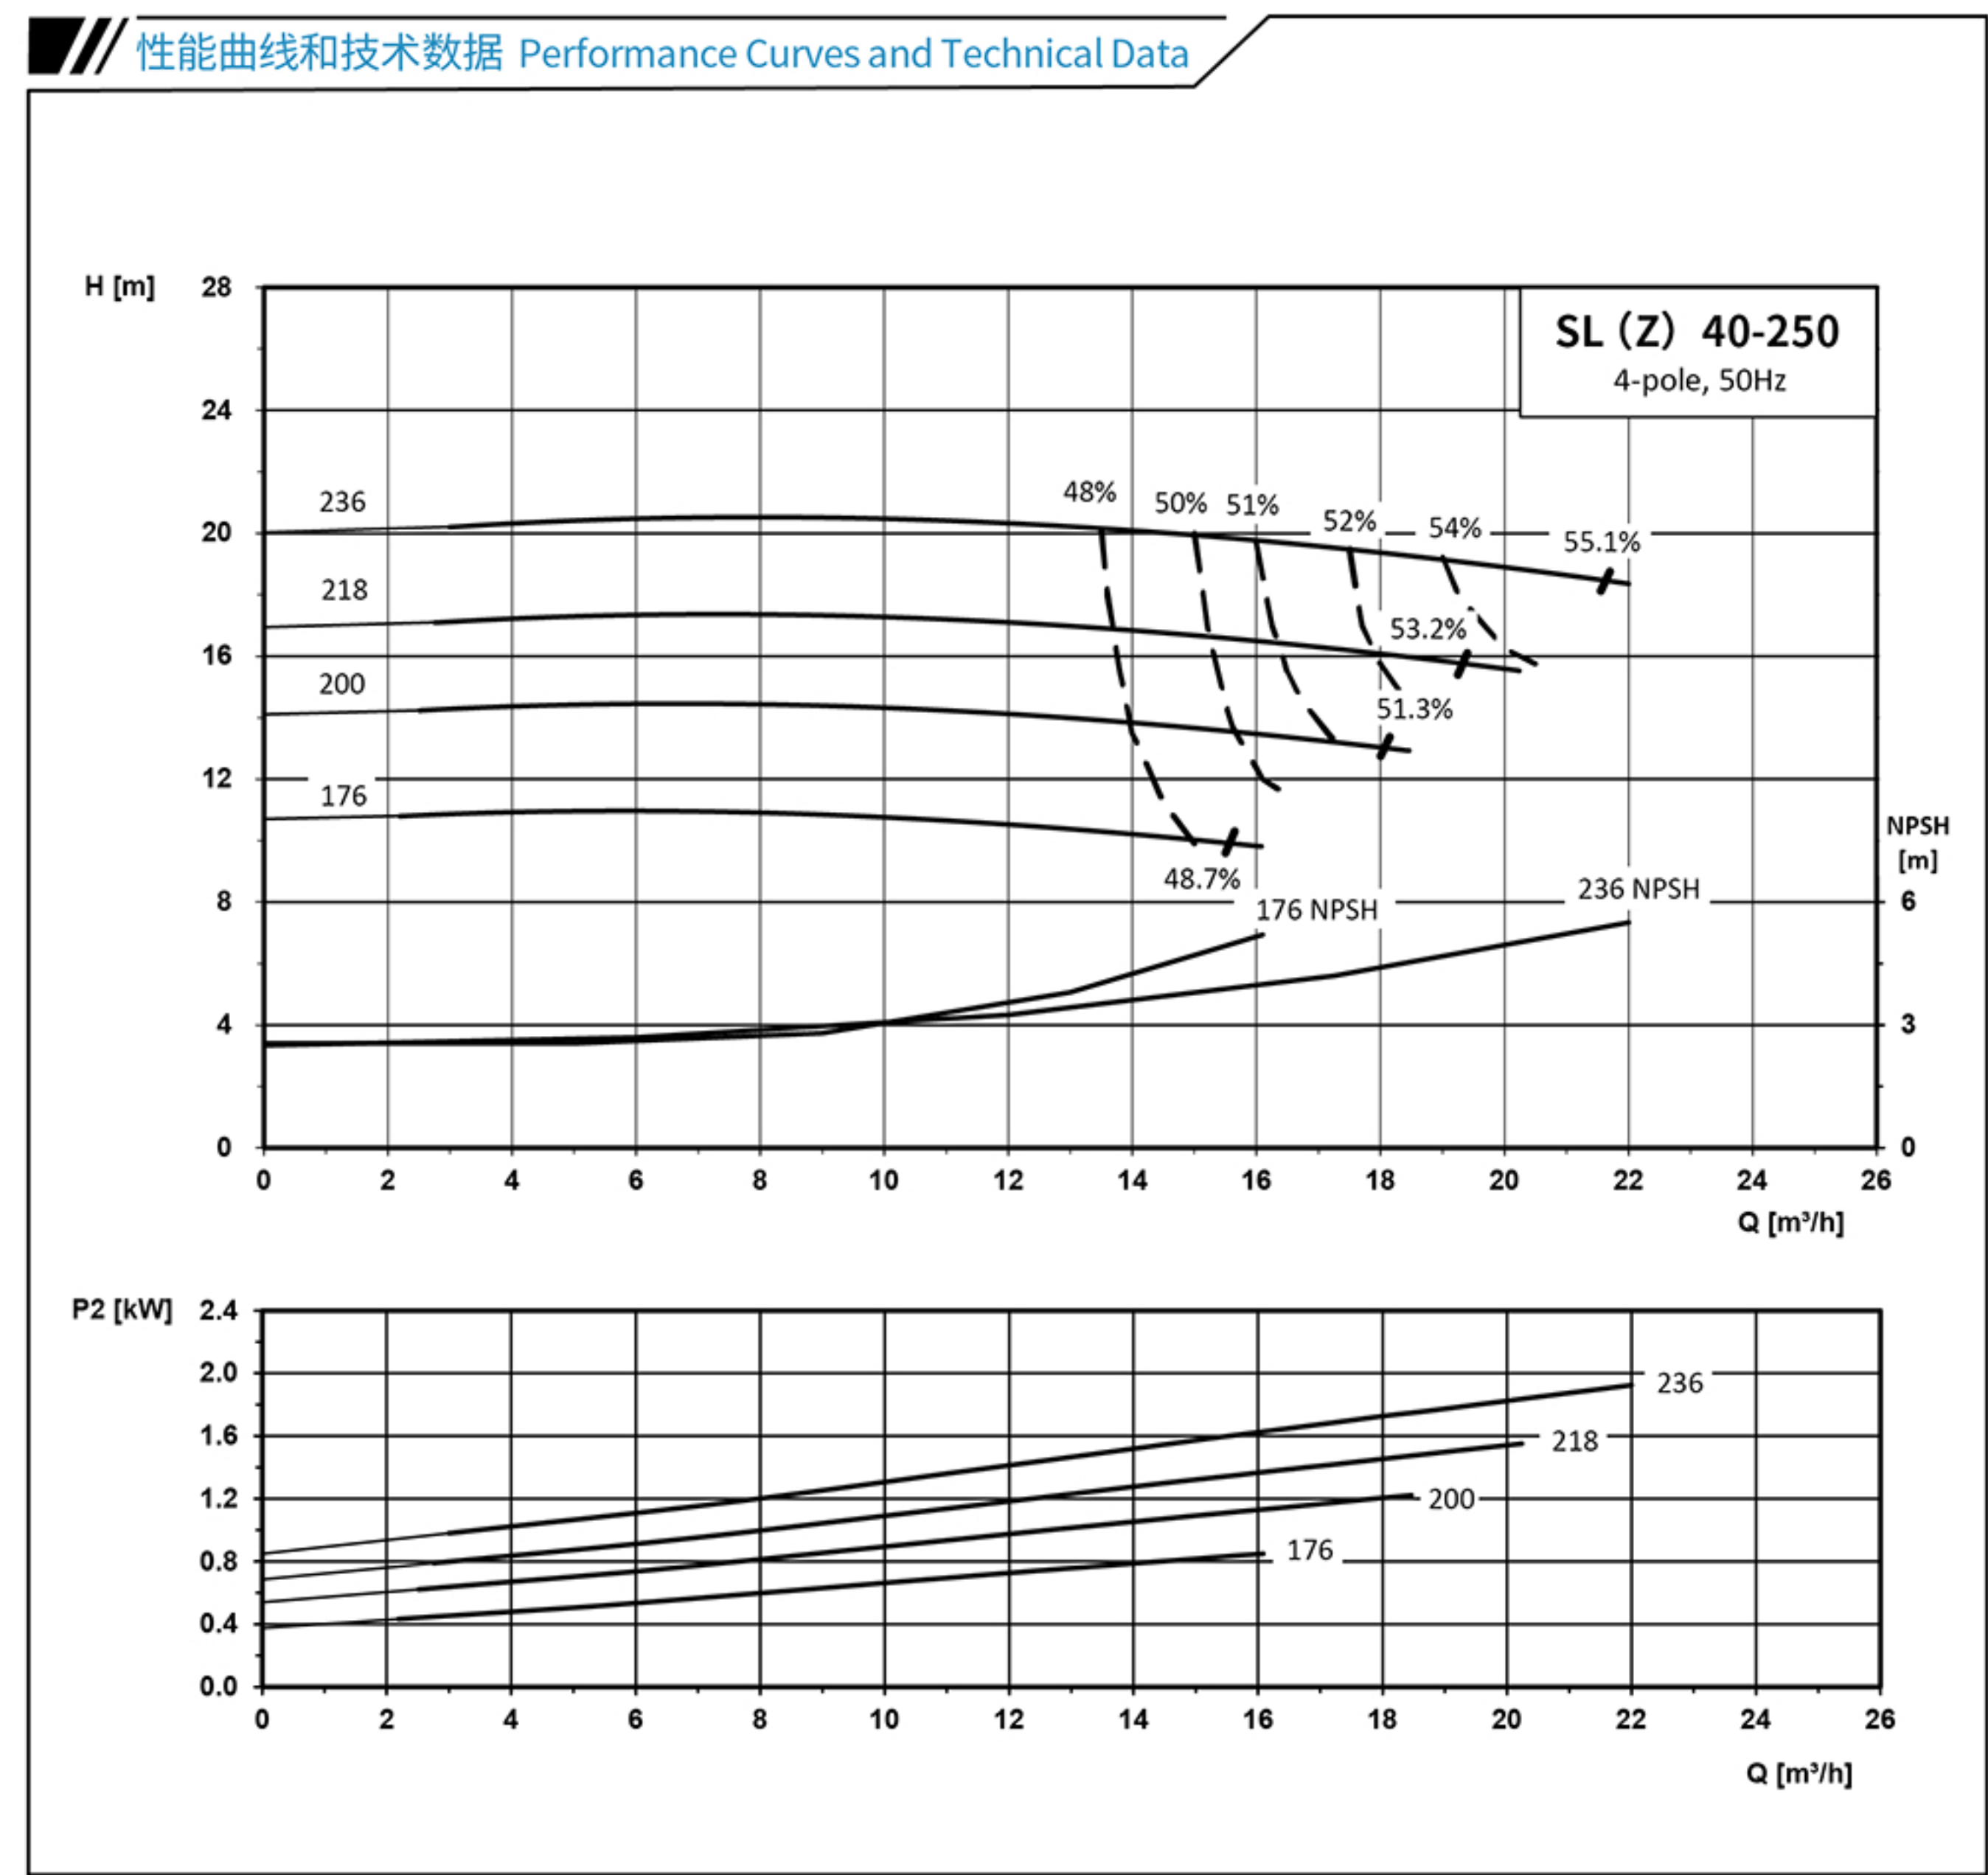

泵型号	Pump Model	SL40-250-0.75-4	SL40-250-1.1-4	SL40-250-1.5-4	SL(Z)40-250-2.2-4
电机型号	Motor Model	YE3-80M2-4	YE3-90S-4	YE3-90L-4	YE3-100L1-4
电机功率(kW)	Motor Power(kW)	0.75	1.1	1.5	2.2
叶轮直径(mm)	Impeller Diameter(mm)	176	200	218	236


SL (Z) 50-250

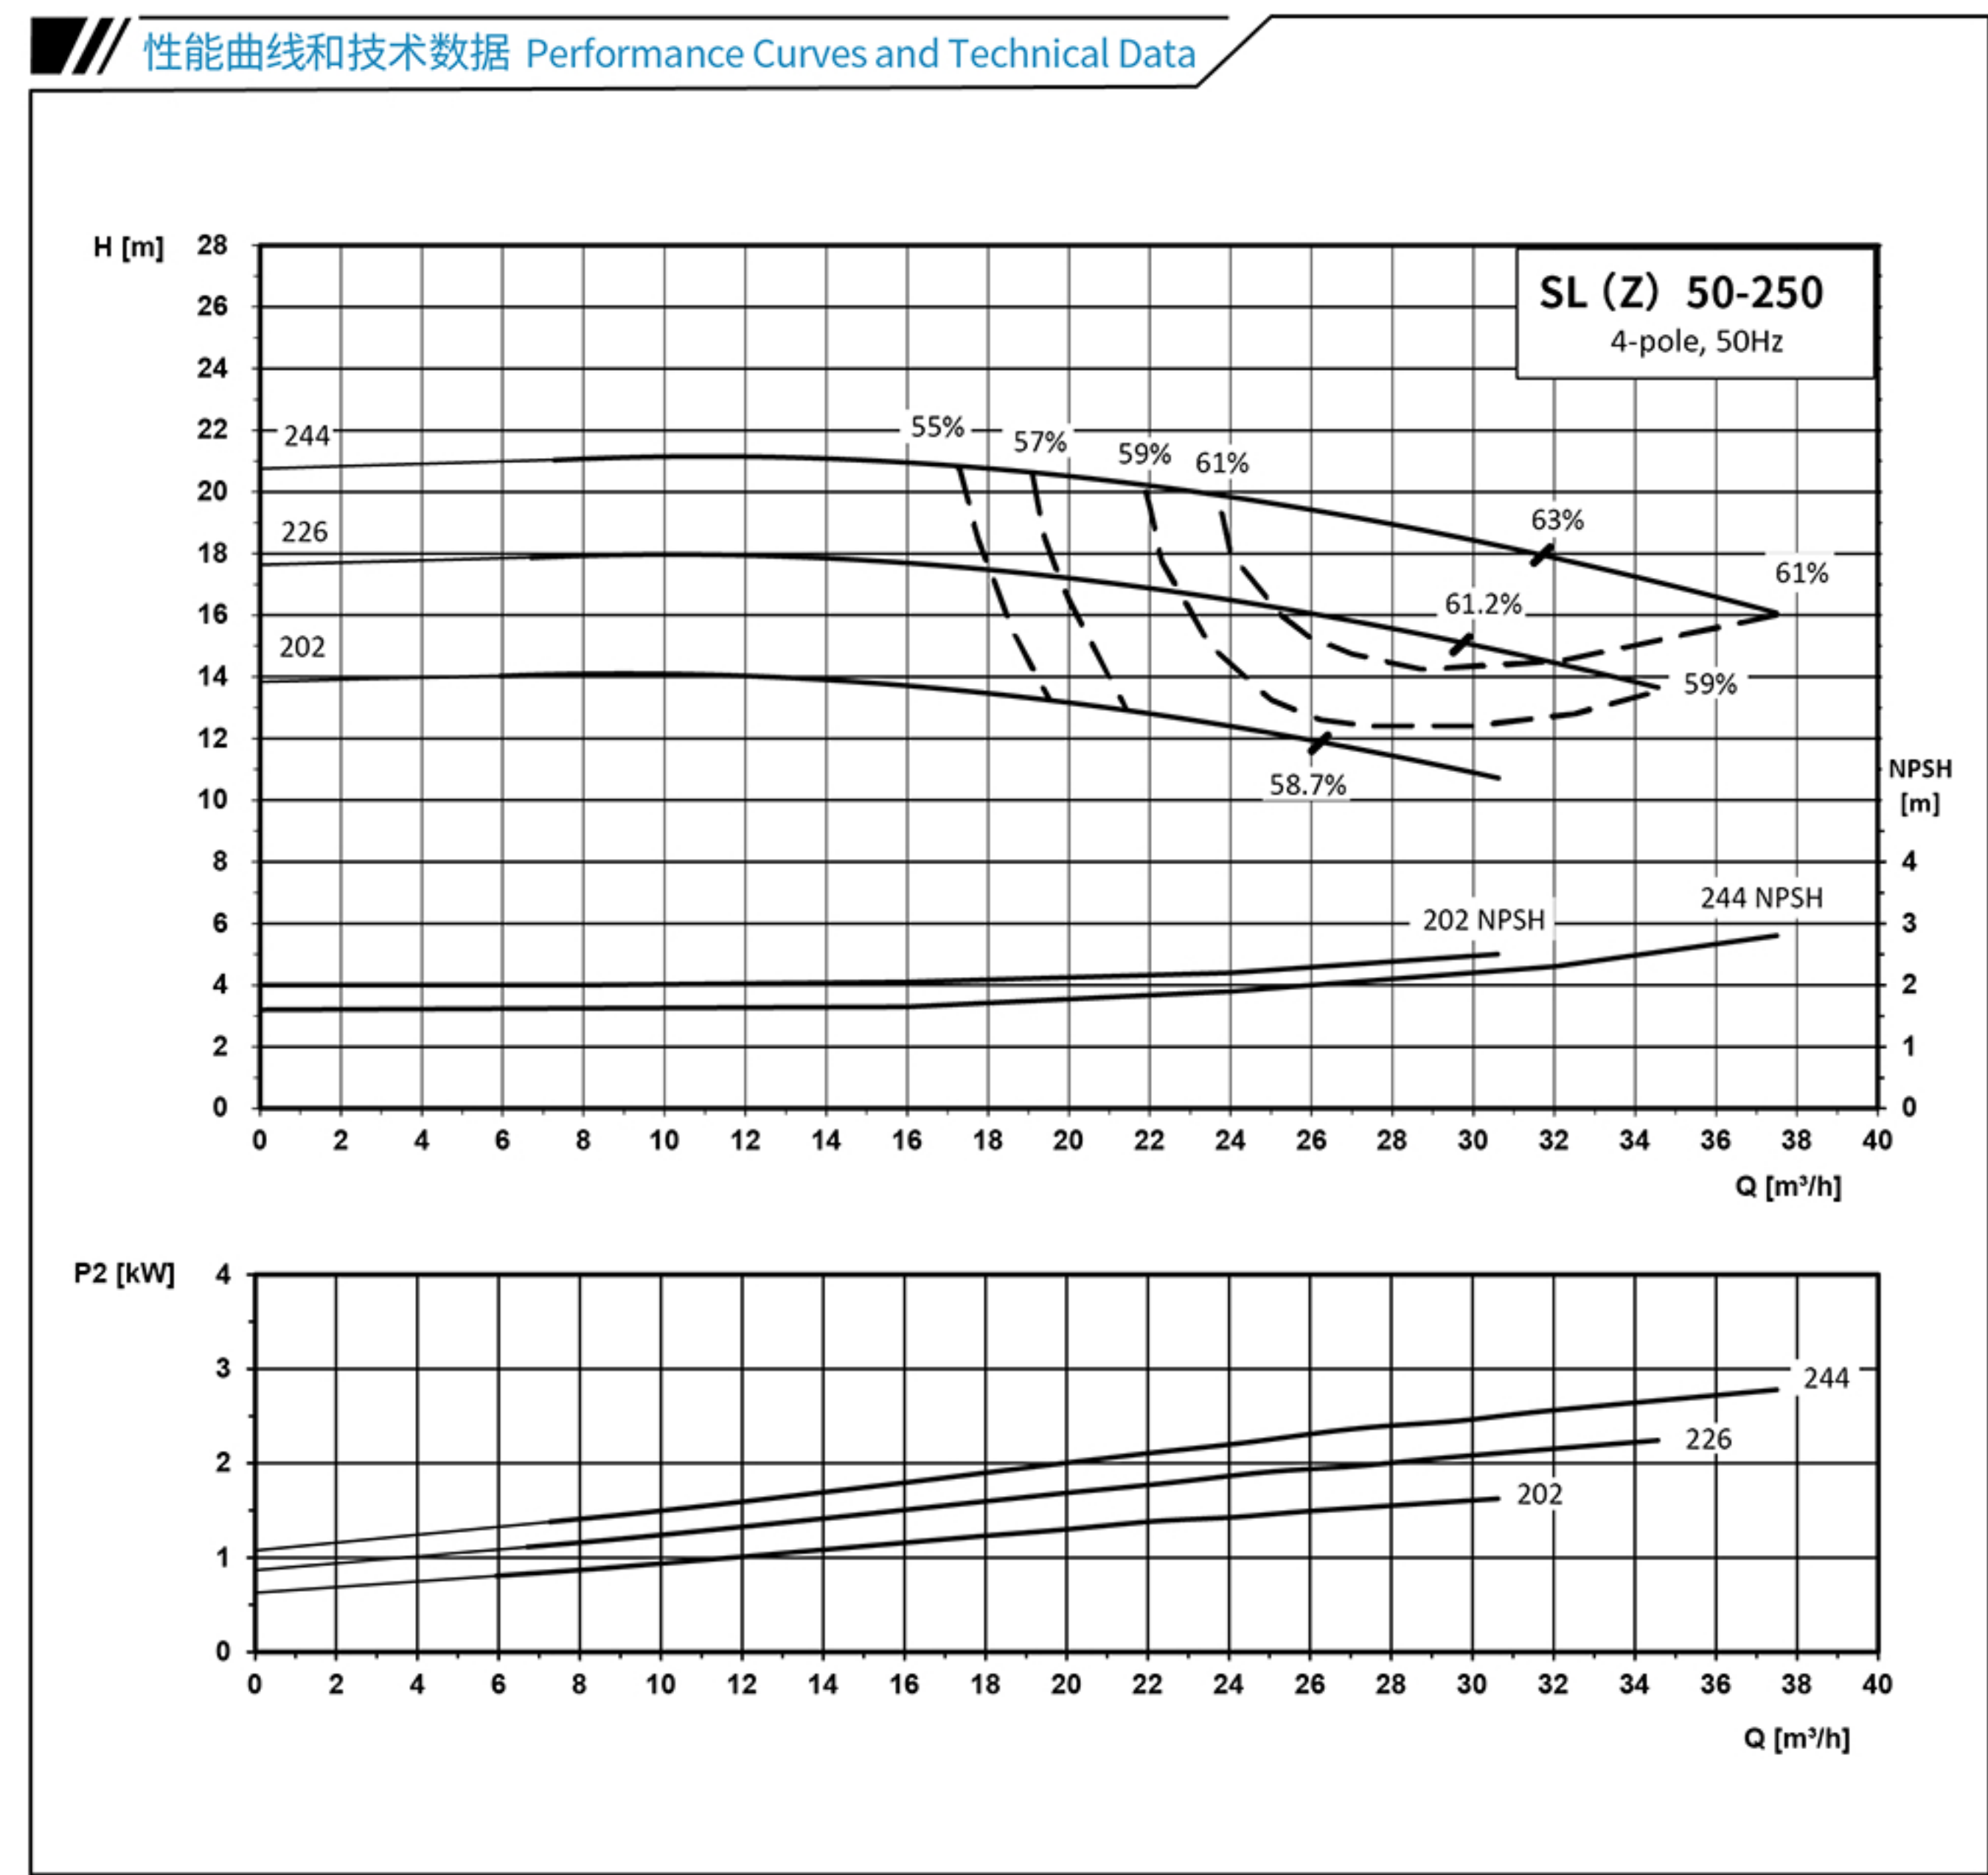

泵型号	Pump Model	SL50-250-1.5-4	SL(Z)50-250-2.2-4	SL(Z)50-250-3-4
电机型号	Motor Model	YE3-90L-4	YE3-100L1-4	YE3-100L2-4
电机功率(kW)	Motor Power(kW)	1.5	2.2	3
叶轮直径(mm)	Impeller Diameter(mm)	202	226	244

SL(Z) 65-250


性能曲线和技术数据 Performance Curves and Technical Data

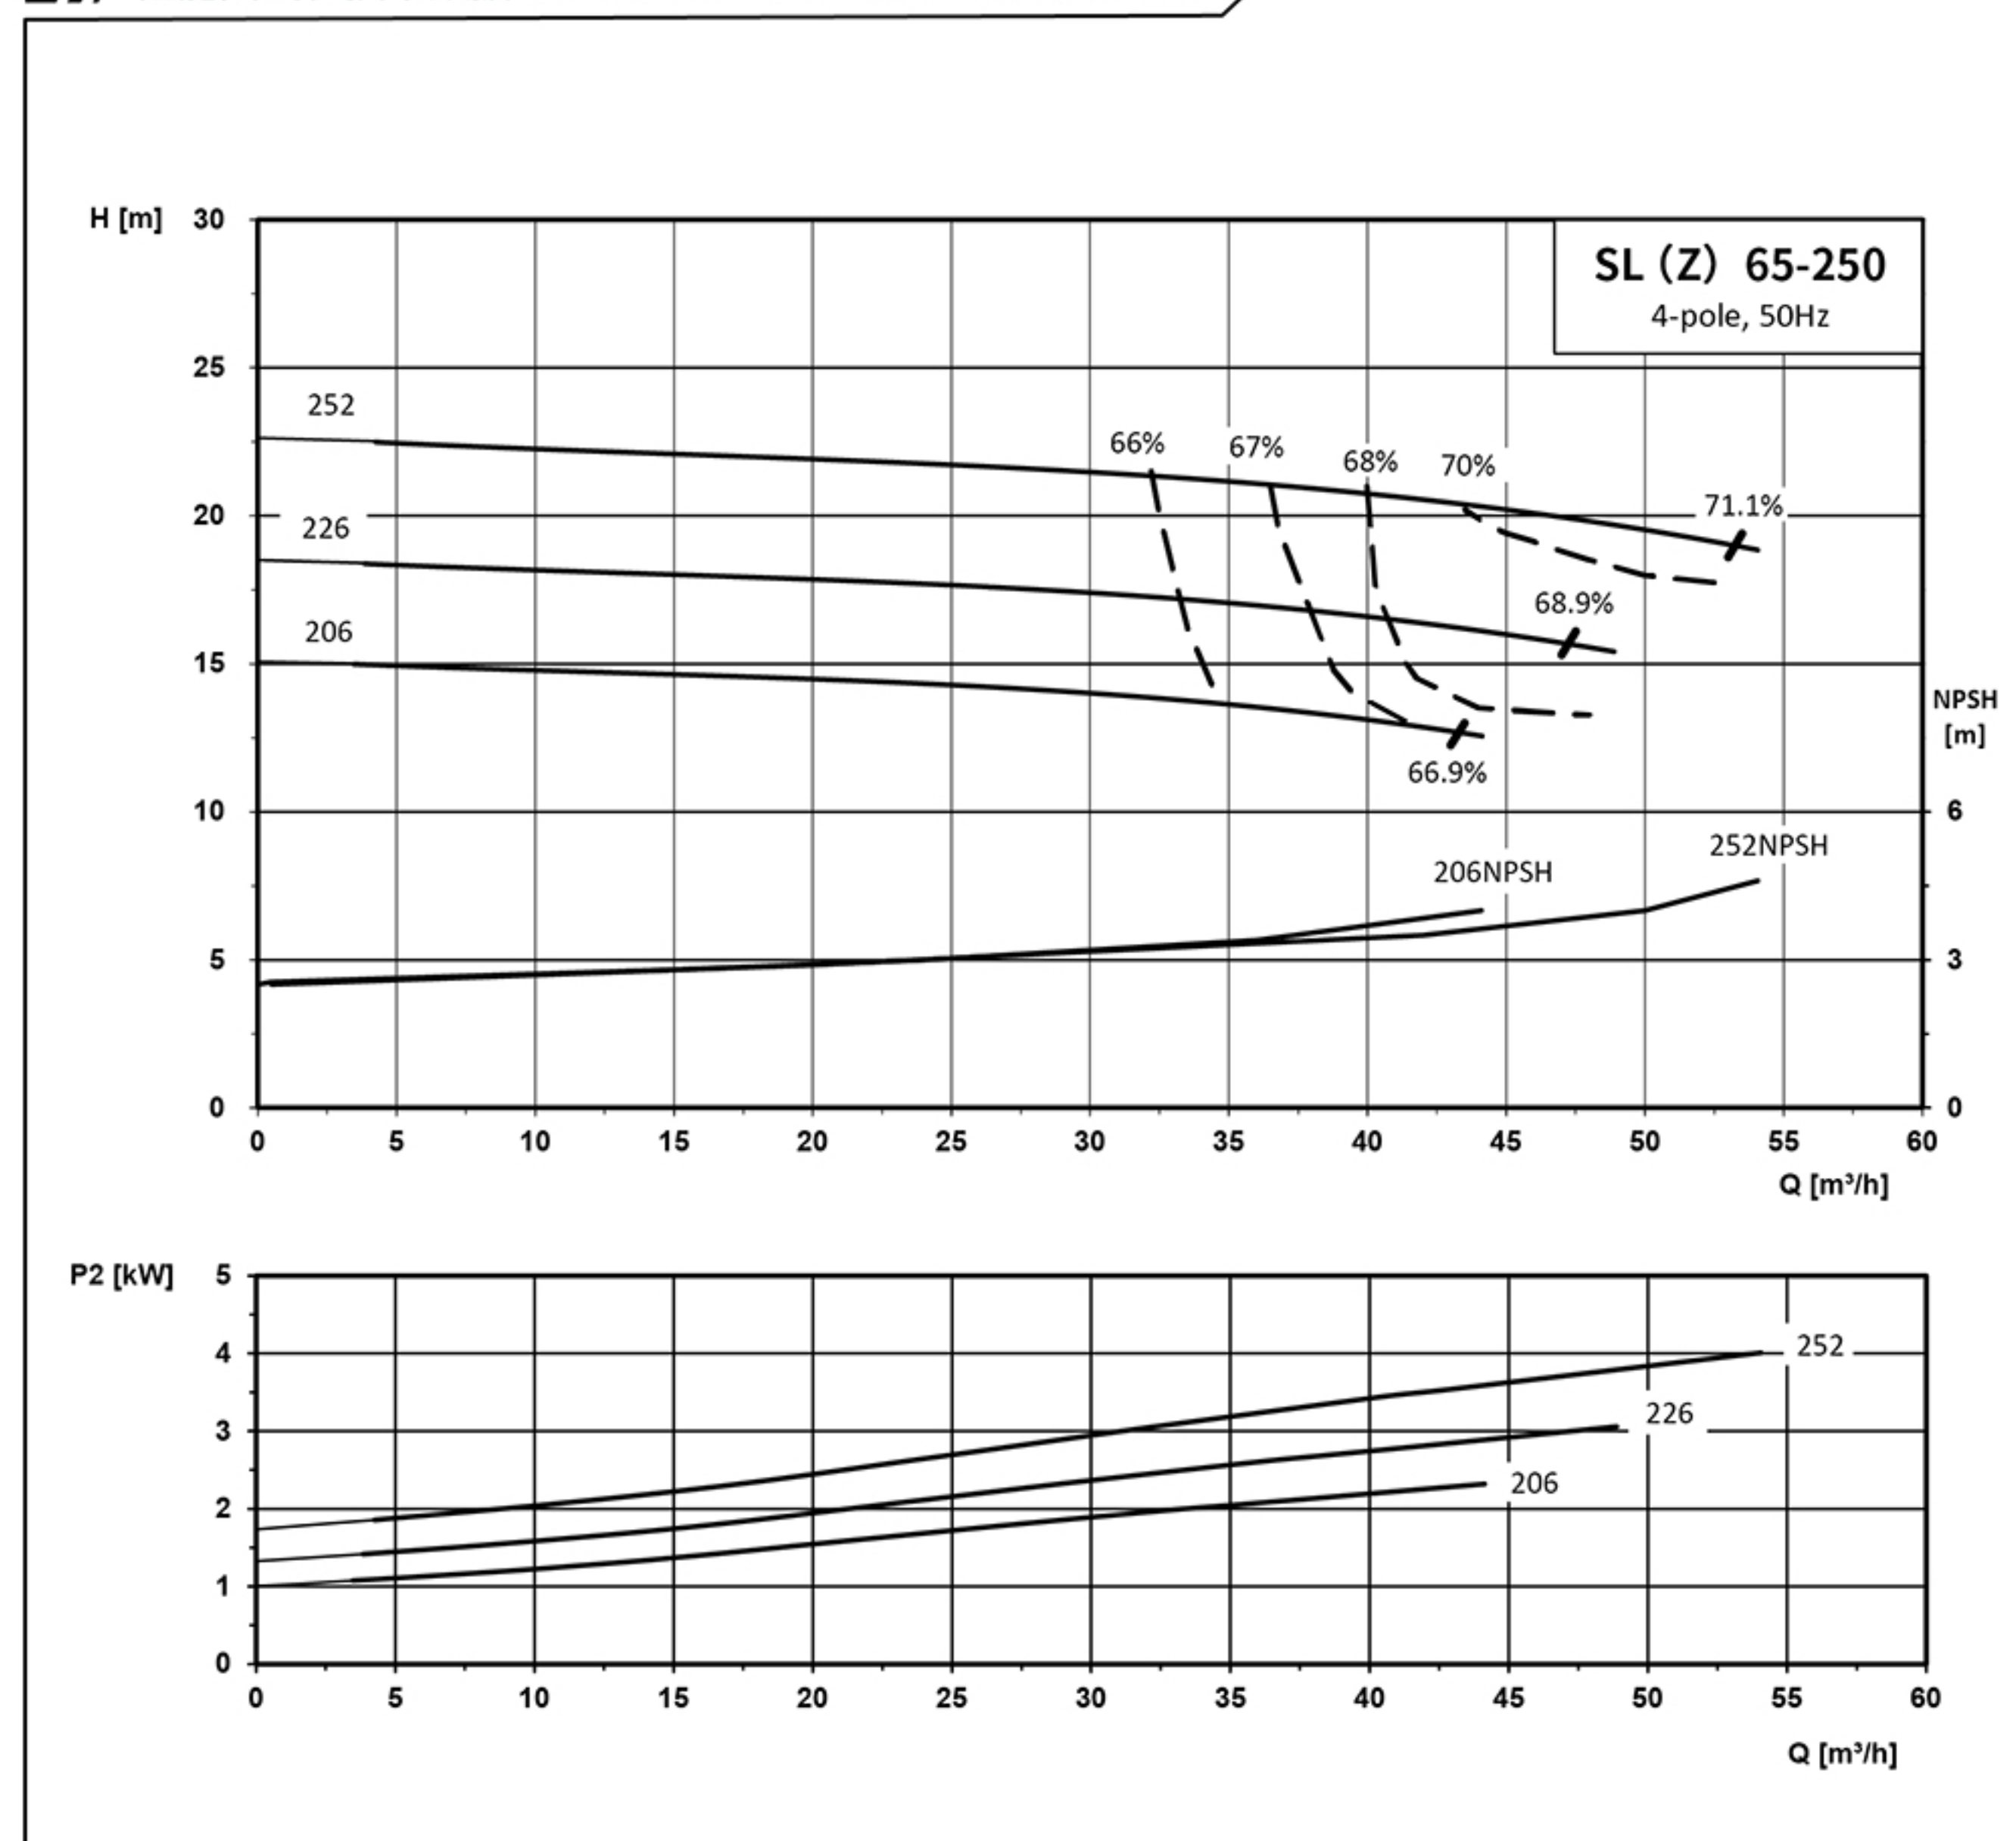

泵型号	Pump Model	SL(Z)65-250-2.2-4	SL(Z)65-250-3-4	SL(Z)65-250-4-4
电机型号	Motor Model	YE3-100L1-4	YE3-100L2-4	YE3-112M-4
电机功率(kW)	Motor Power(kW)	2.2	3	4
叶轮直径(mm)	Impeller Diameter(mm)	206	226	252

SL(Z) 80-250


性能曲线和技术数据 Performance Curves and Technical Data

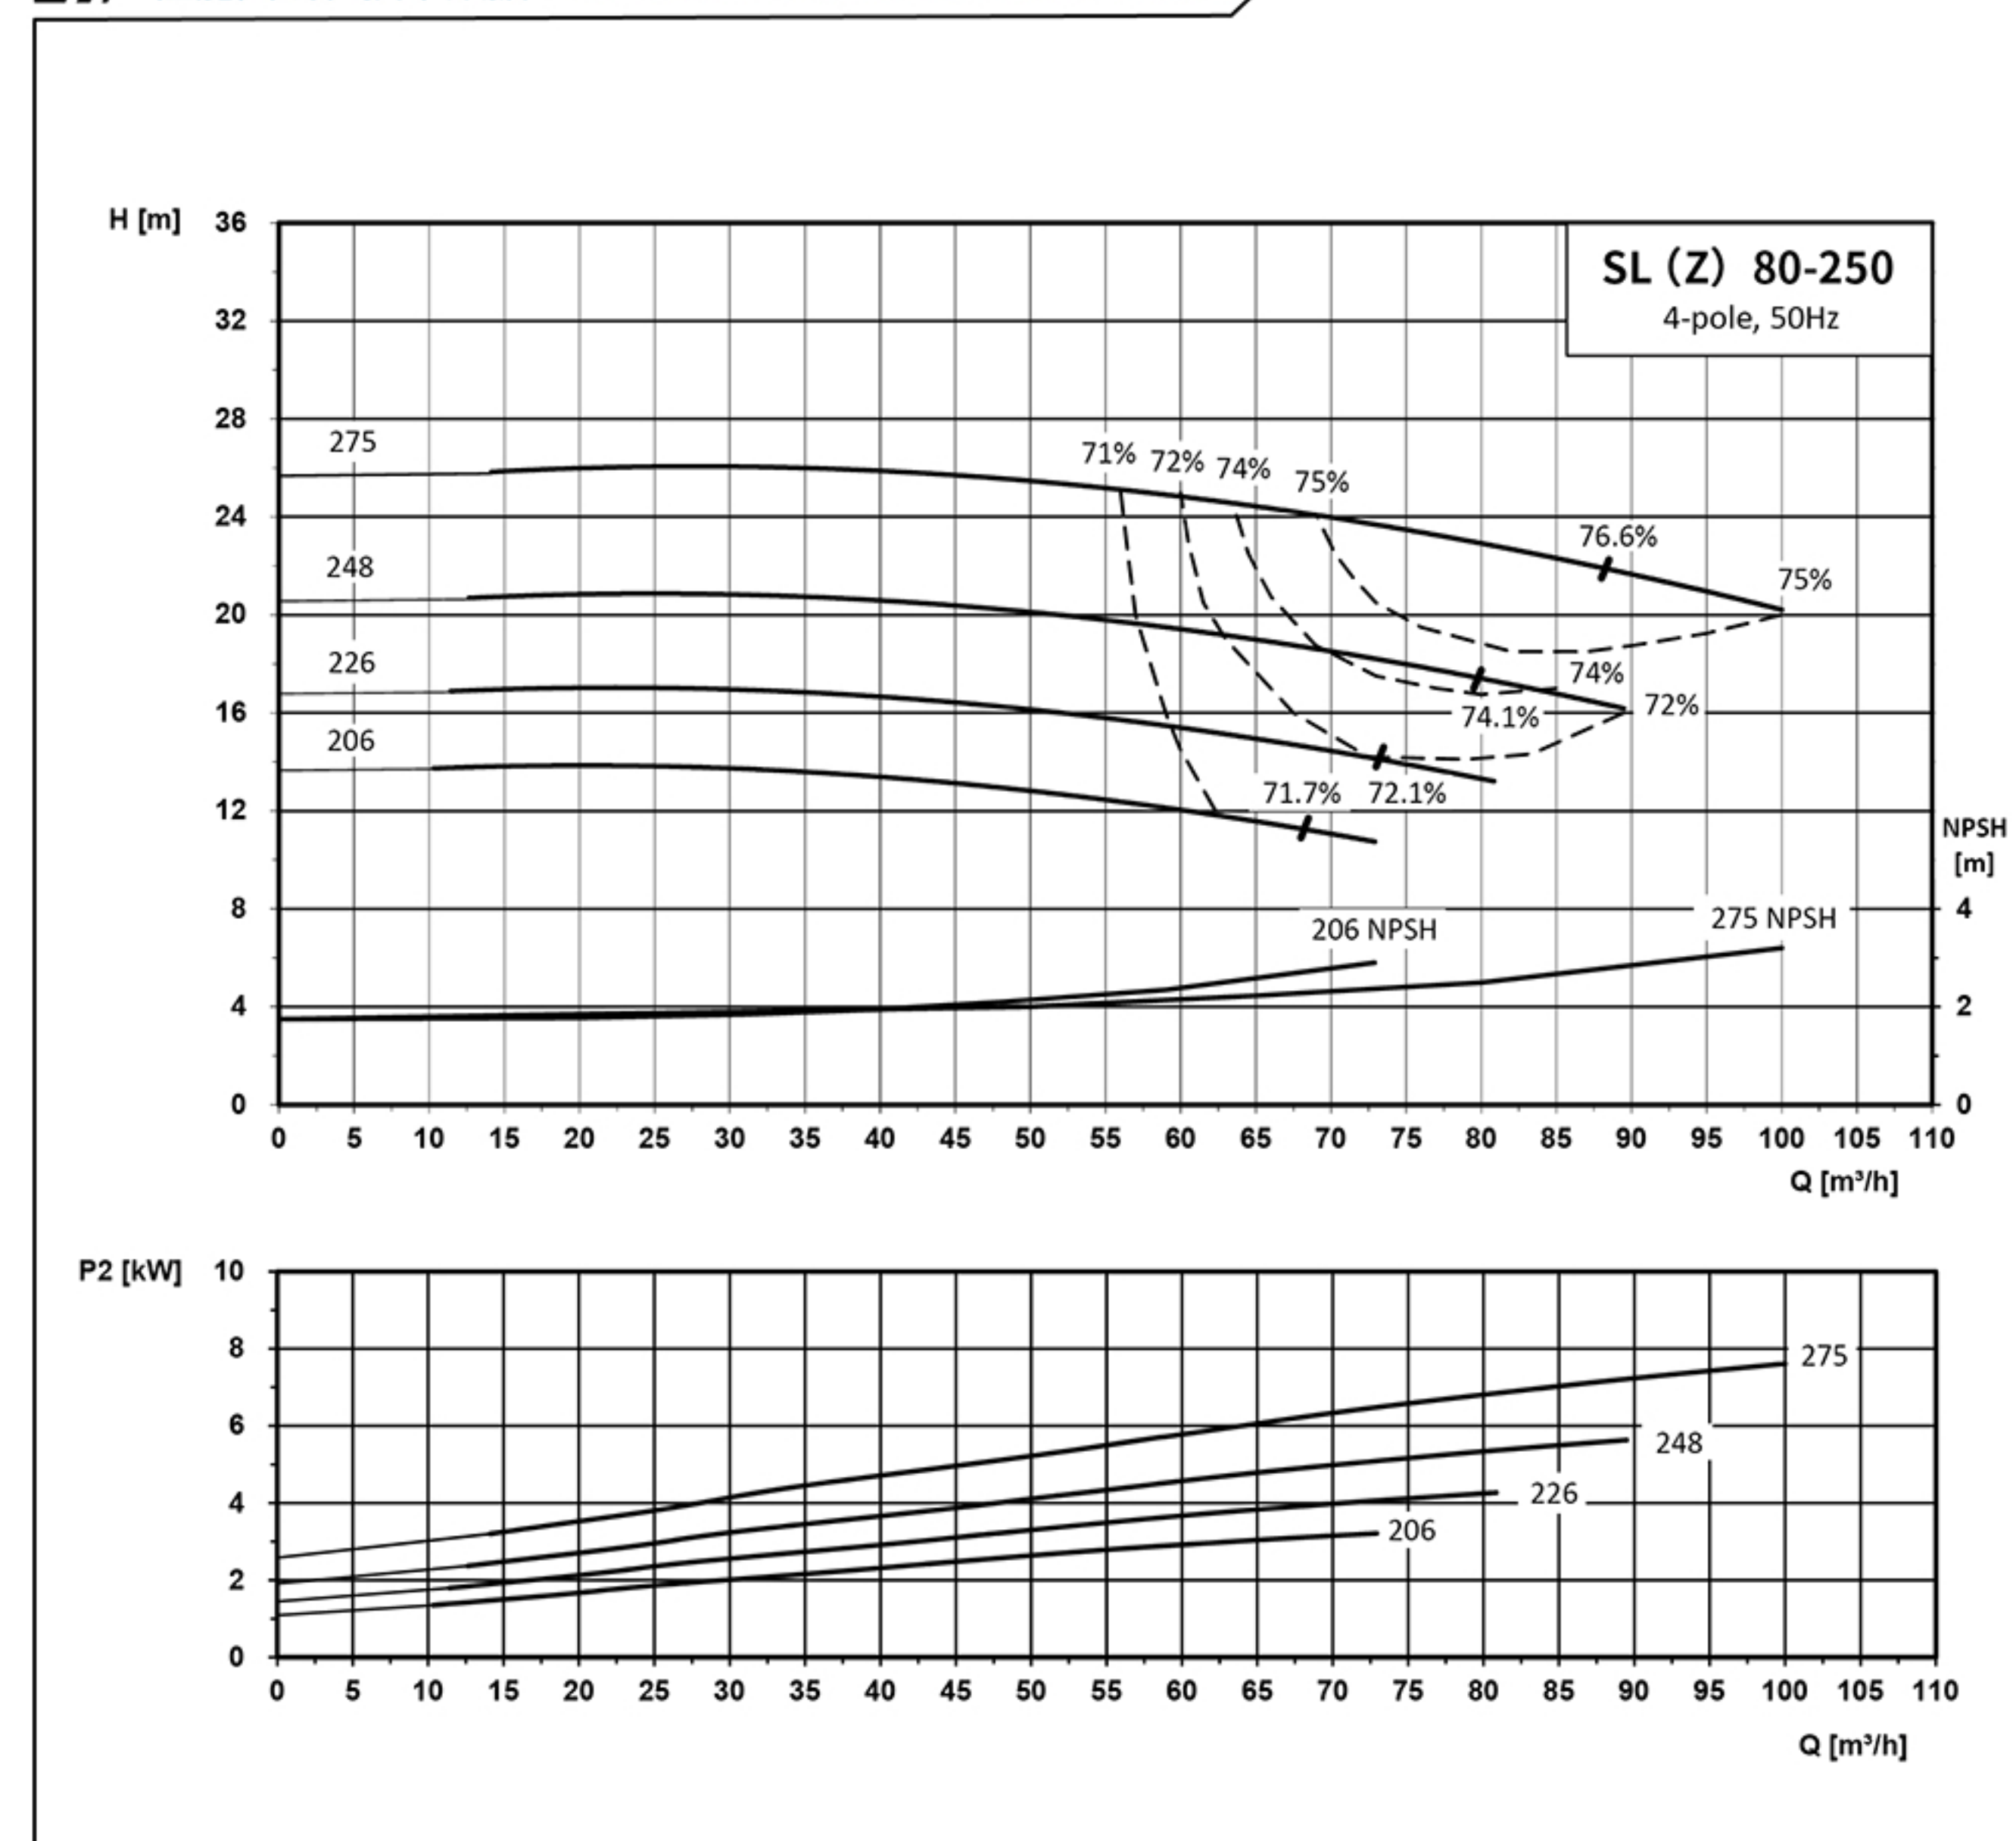

泵型号	Pump Model	SL80-250-3-4	SL80-250-4-4	SL(Z)80-250-5.5-4	SL(Z)80-250-7.5-4
电机型号	Motor Model	YE3-100L2-4	YE3-112M-4	YE3-132S-4	YE3-132M-4
电机功率(kW)	Motor Power(kW)	3	4	5.5	7.5
叶轮直径(mm)	Impeller Diameter(mm)	206	226	248	275

SL(Z) 100-250


性能曲线和技术数据 Performance Curves and Technical Data

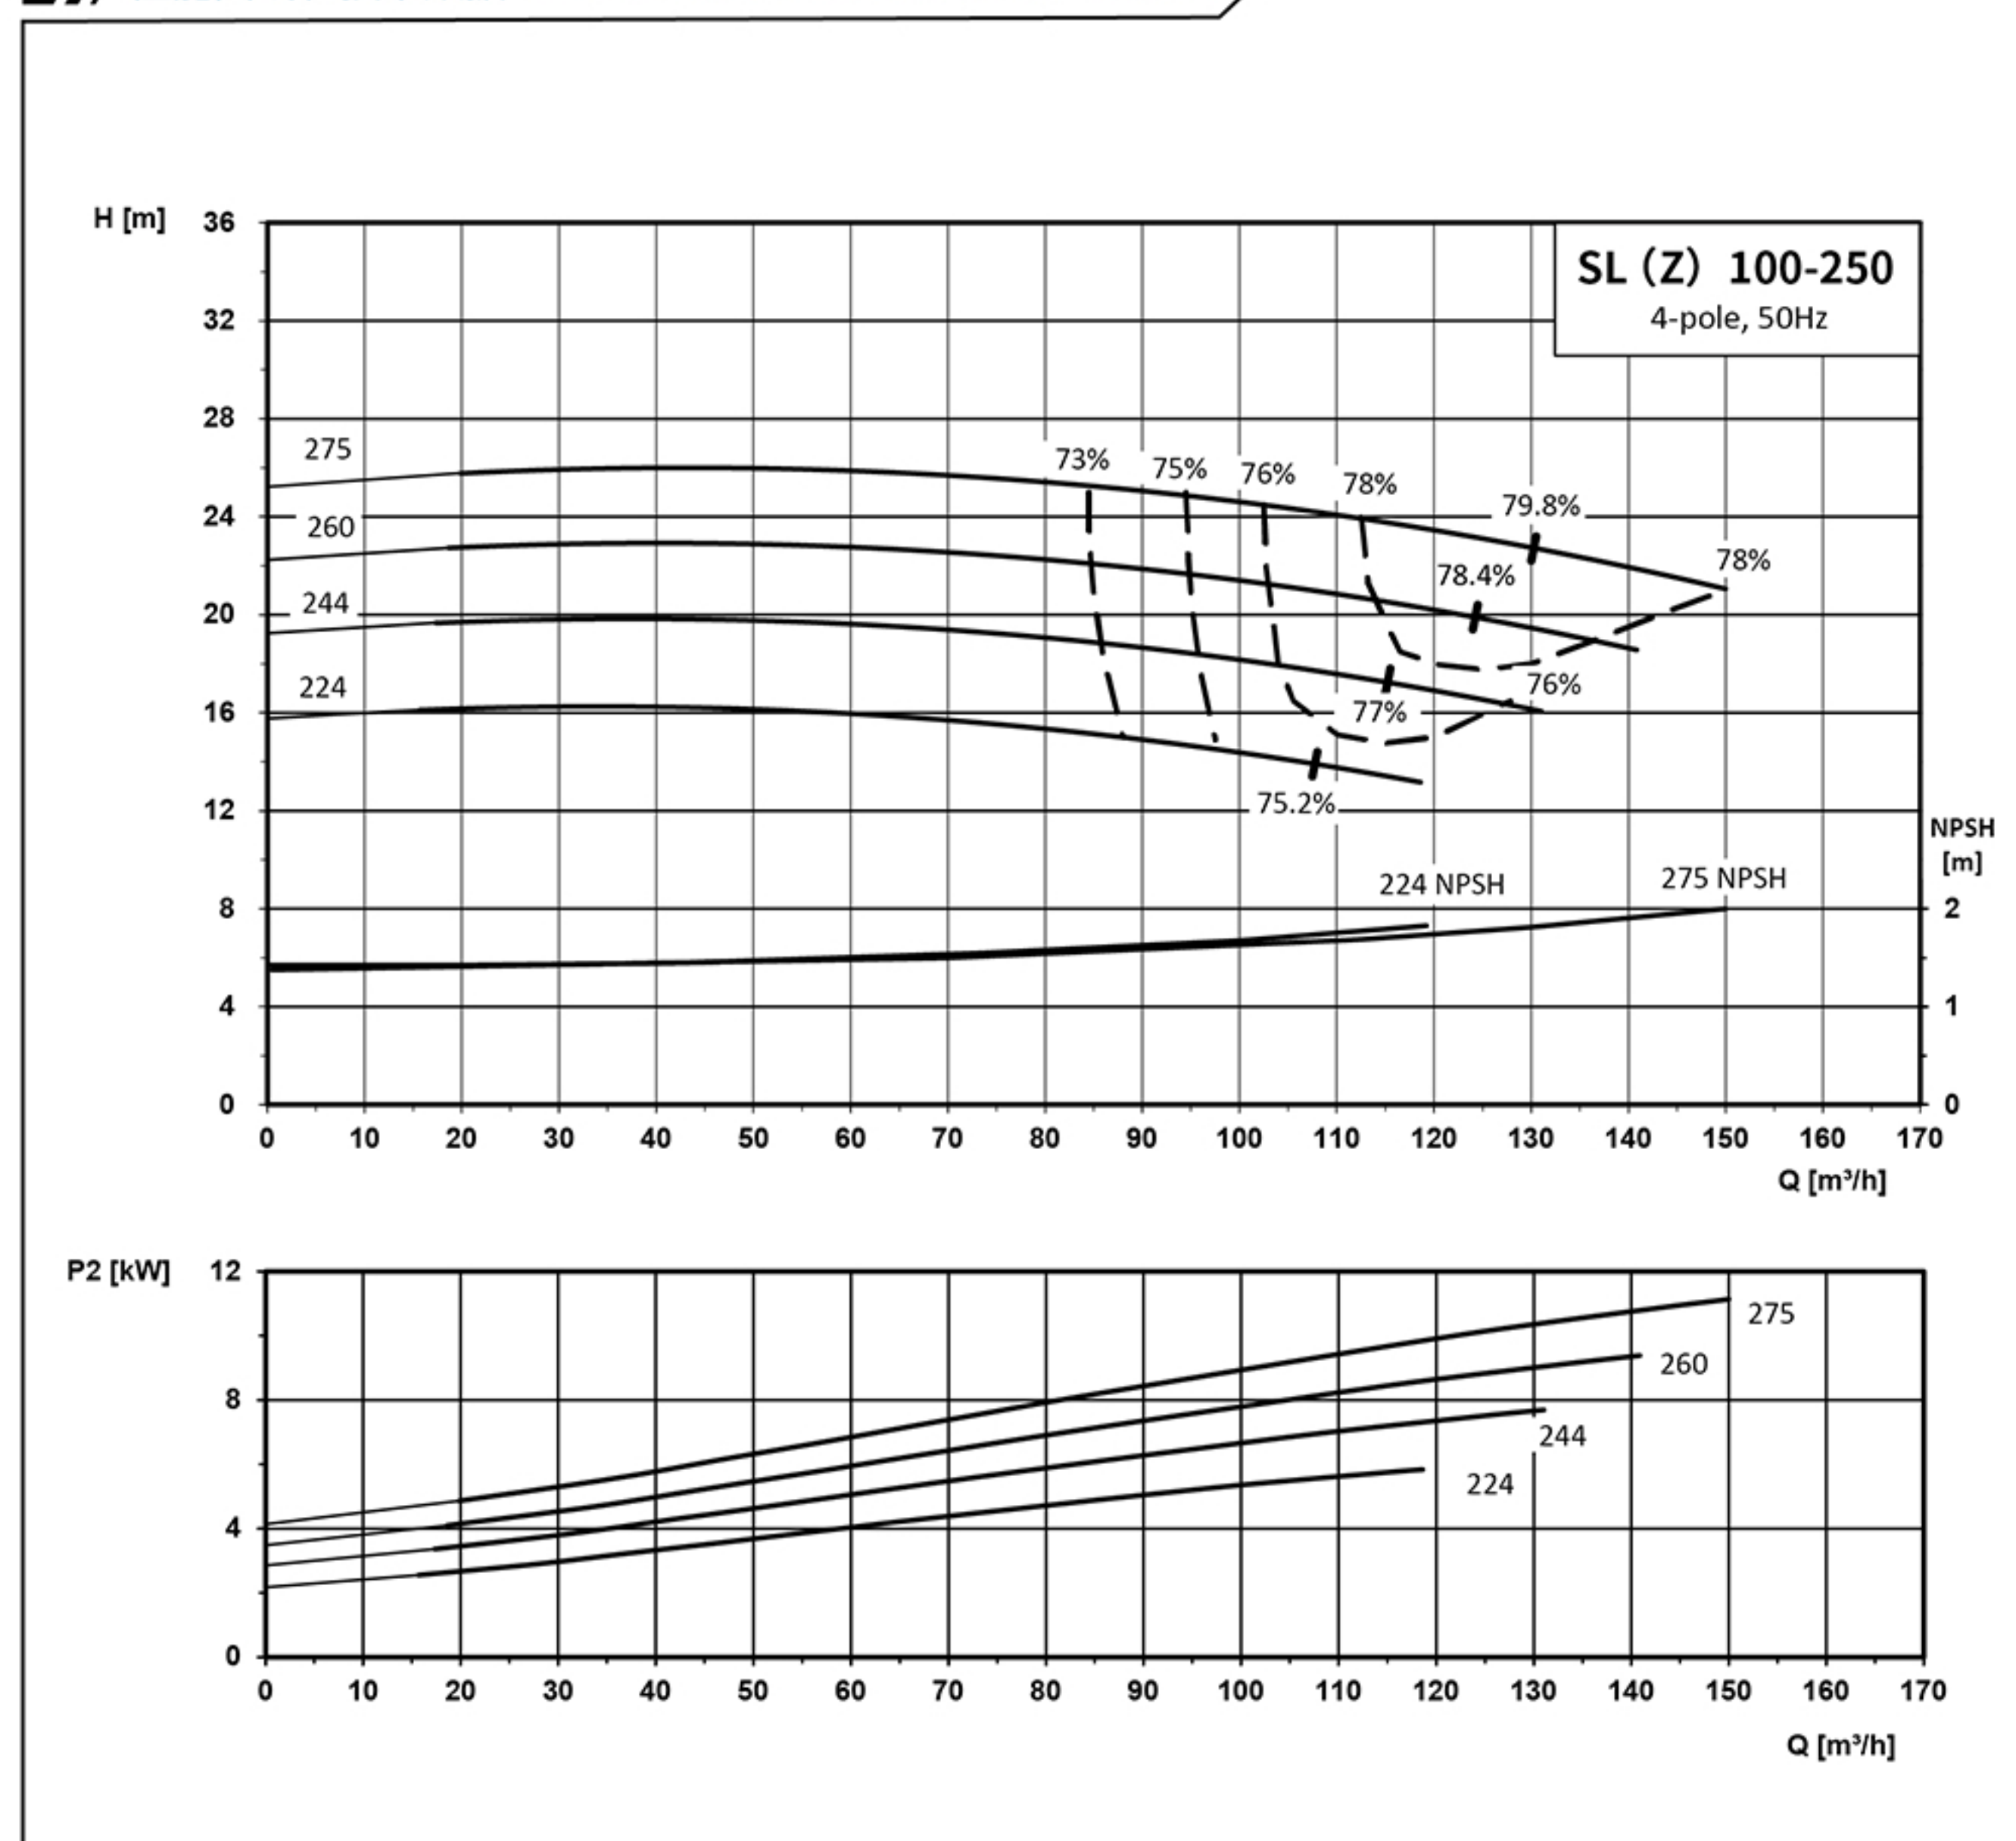

泵型号	Pump Model	SL(Z)100-250-5.5-4	SL(Z)100-250-7.5-4	SL(Z)100-250-9.2-4	SL(Z)100-250-11-4
电机型号	Motor Model	YE3-132S-4	YE3-132M-4	YE3-132L-4	YE3-160M-4
电机功率(kW)	Motor Power(kW)	5.5	7.5	9.2	11
叶轮直径(mm)	Impeller Diameter(mm)	224	244	260	275

SL(Z) 125-250


性能曲线和技术数据 Performance Curves and Technical Data

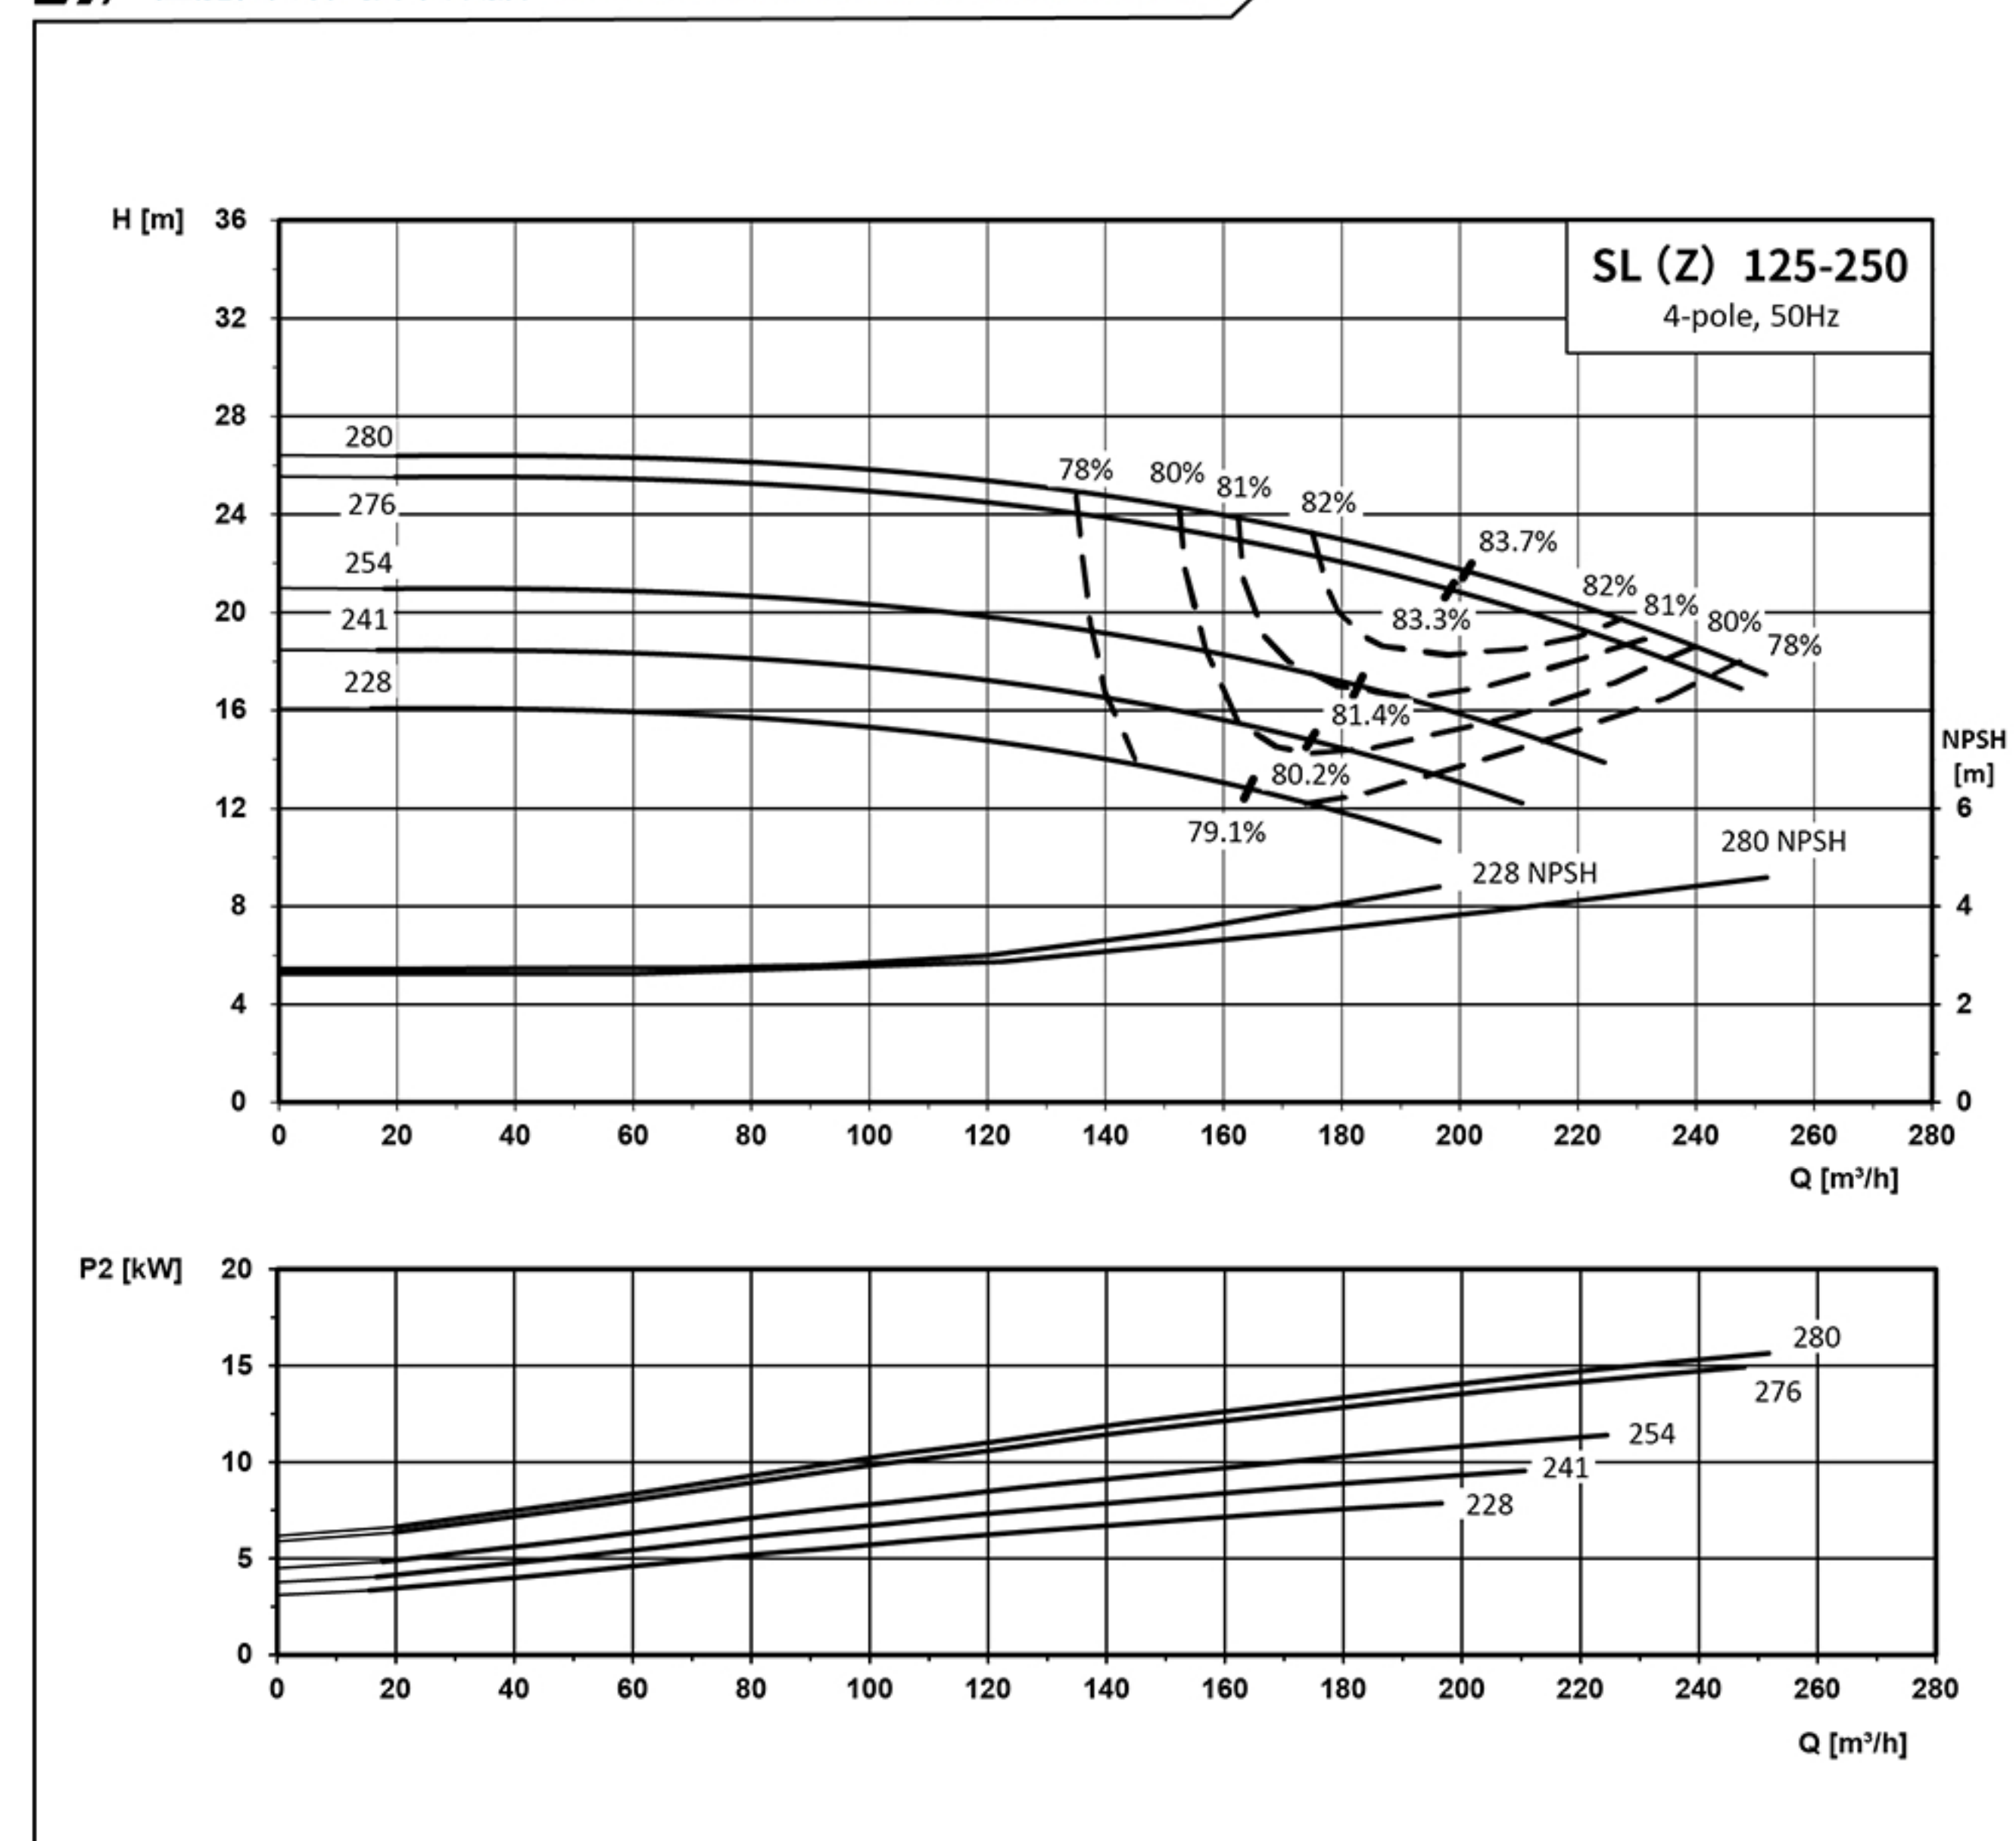

泵型号	Pump Model	SL(Z)125-250-7.5-4	SL(Z)125-250-9.2-4	SL(Z)125-250-11-4	SL(Z)125-250-15-4	SL(Z)125-250-18.5-4
电机型号	Motor Model	YE3-132M-4	YE3-132L-4	YE3-160M-4	YE3-160L-4	YE3-180M-4
电机功率(kW)	Motor Power(kW)	7.5	9.2	11	15	18.5
叶轮直径(mm)	Impeller Diameter(mm)	228	241	254	276	280

SL(Z) 150-250


性能曲线和技术数据 Performance Curves and Technical Data

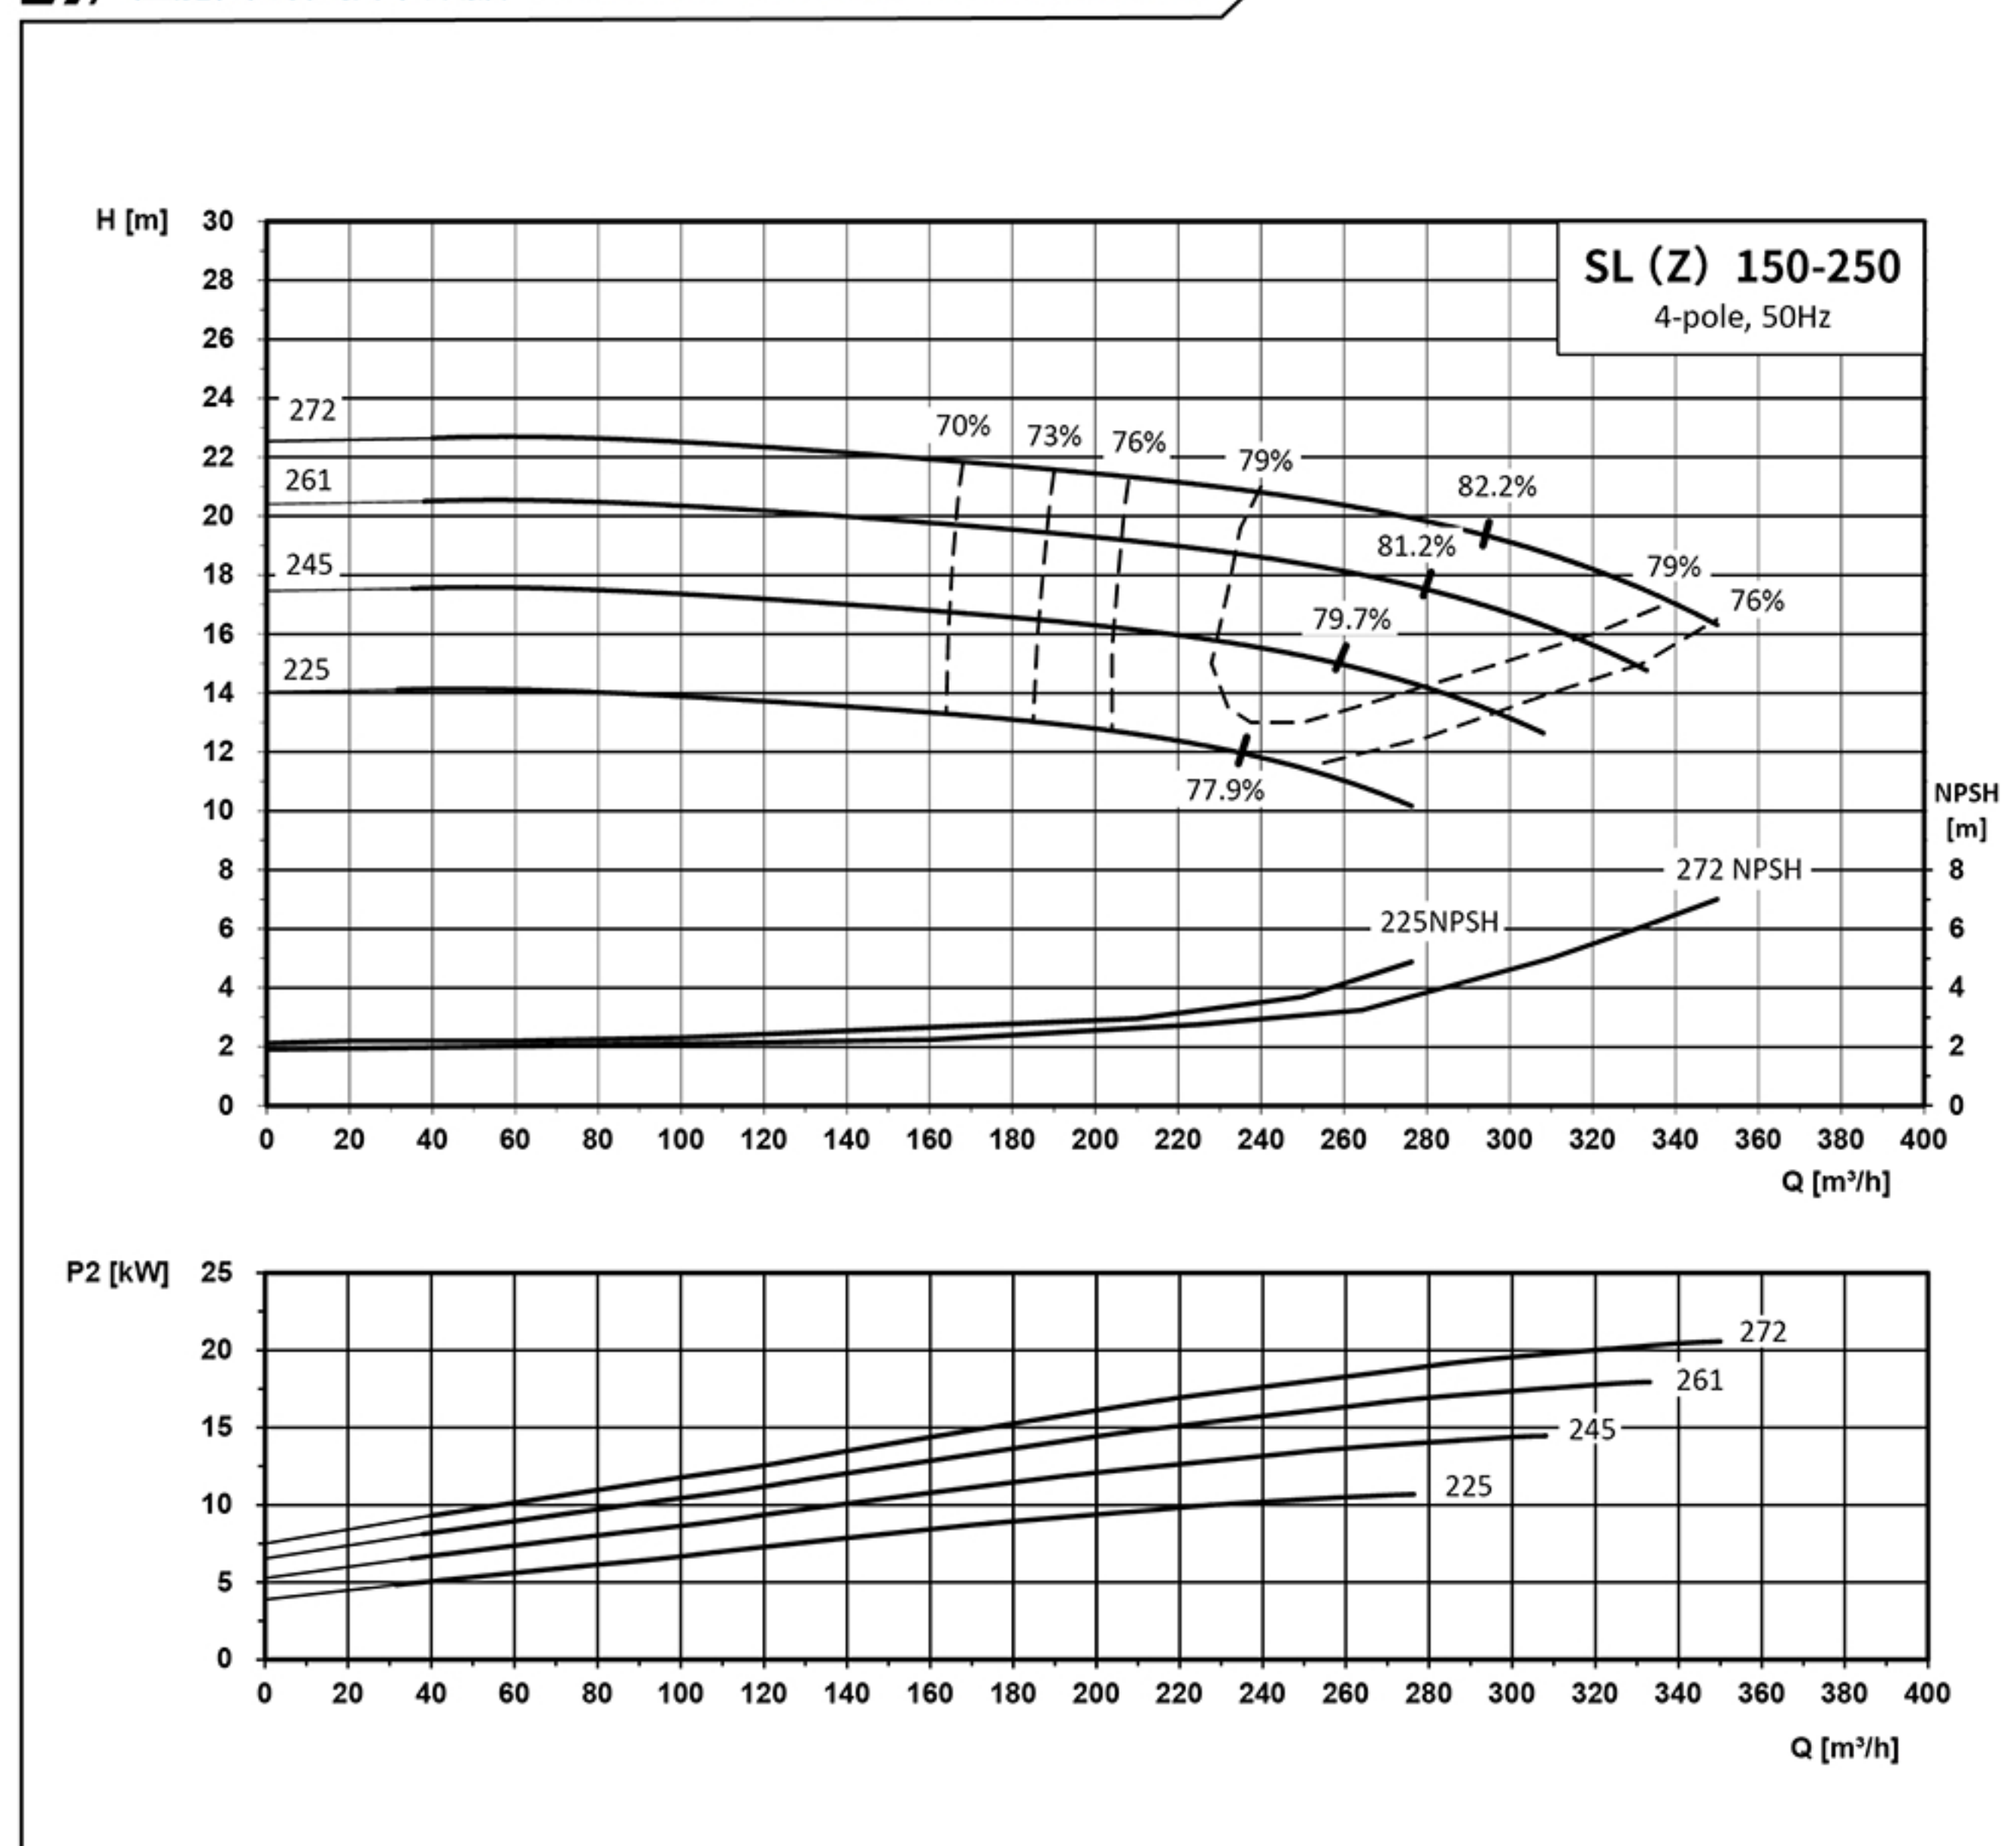

泵型号	Pump Model	SL(Z)150-250-11-4	SL(Z)150-250-15-4	SL(Z)150-250-18.5-4	SL(Z)150-250-22-4
电机型号	Motor Model	YE3-160M-4	YE3-160L-4	YE3-180M-4	YE3-180L-4
电机功率(kW)	Motor Power(kW)	11	15	18.5	22
叶轮直径(mm)	Impeller Diameter(mm)	225	245	261	272


SL(Z) 200-250

性能曲线和技术数据 Performance Curves and Technical Data

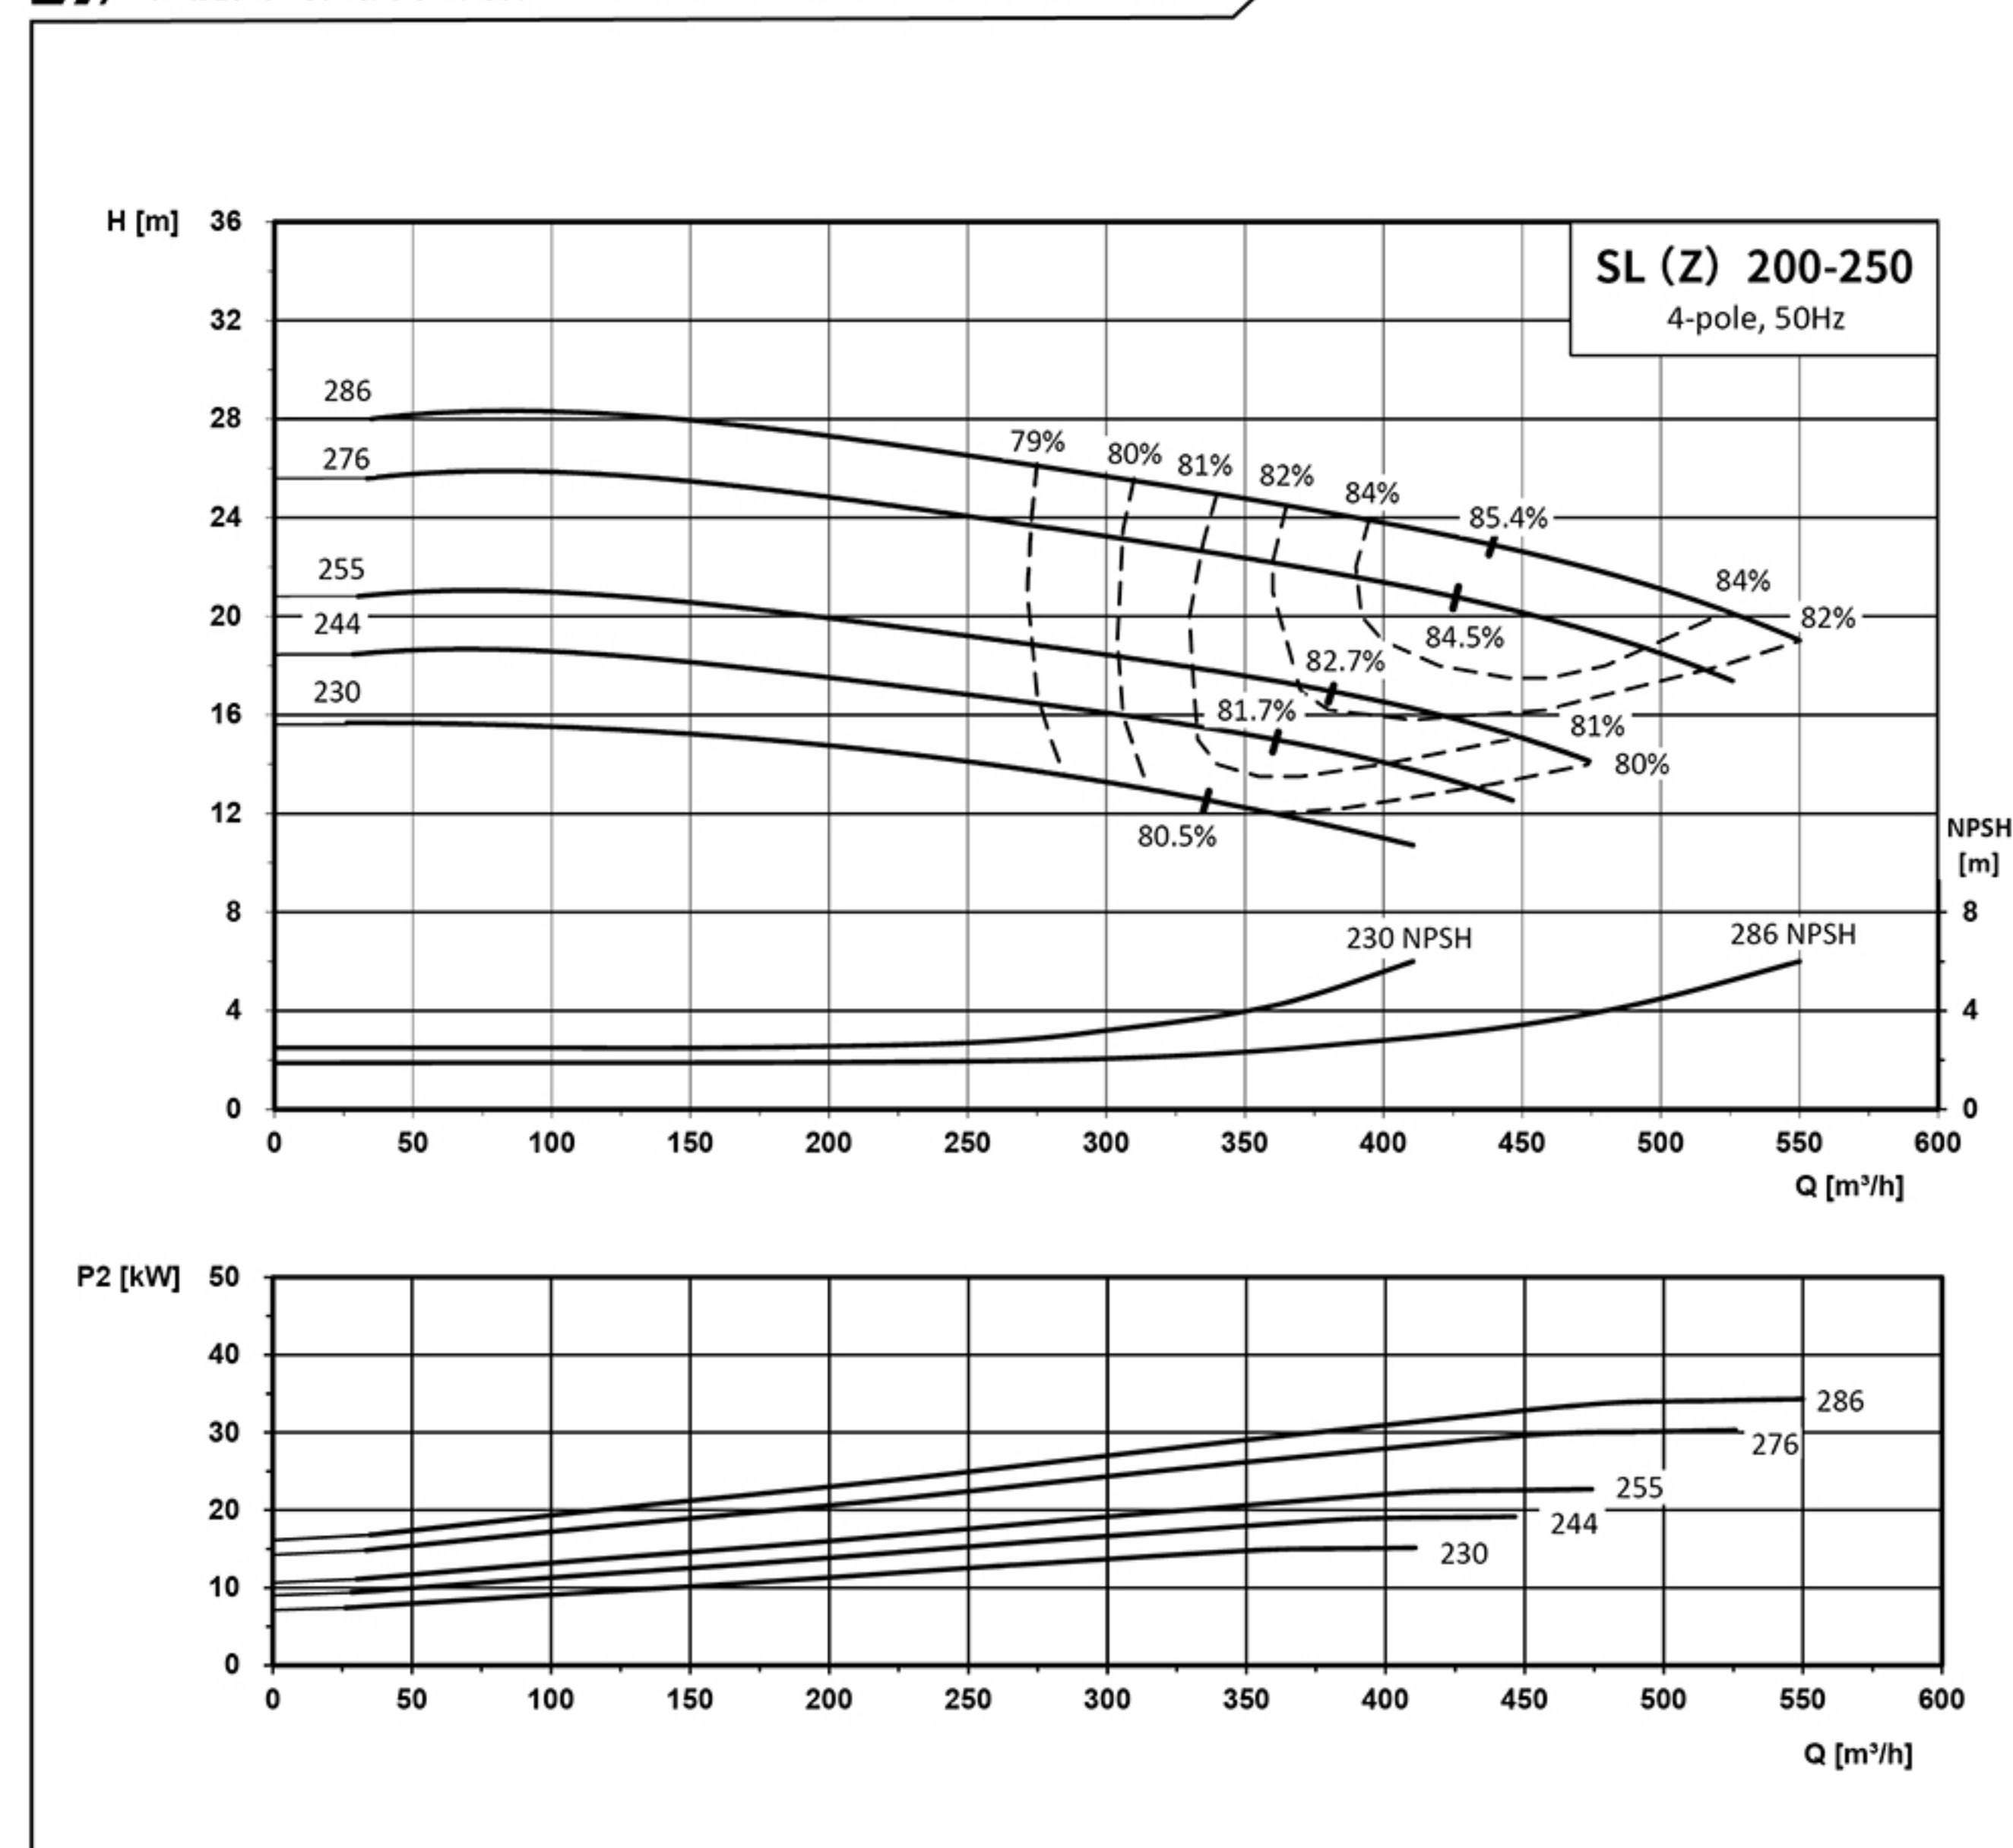


泵型号	Pump Model	SL200-250-15-4	SL(Z)200-250-18.5-4	SL(Z)200-250-22-4	SL(Z)200-250-30-4	SL(Z)200-250-37-4
电机型号	Motor Model	YE3-160L-4	YE3-180M-4	YE3-180L-4	YE3-200L-4	YE3-225S-4
电机功率(kW)	Motor Power(kW)	15	18.5	22	30	37
叶轮直径(mm)	Impeller Diameter(mm)	230	244	255	276	286

SL(Z) 50-315

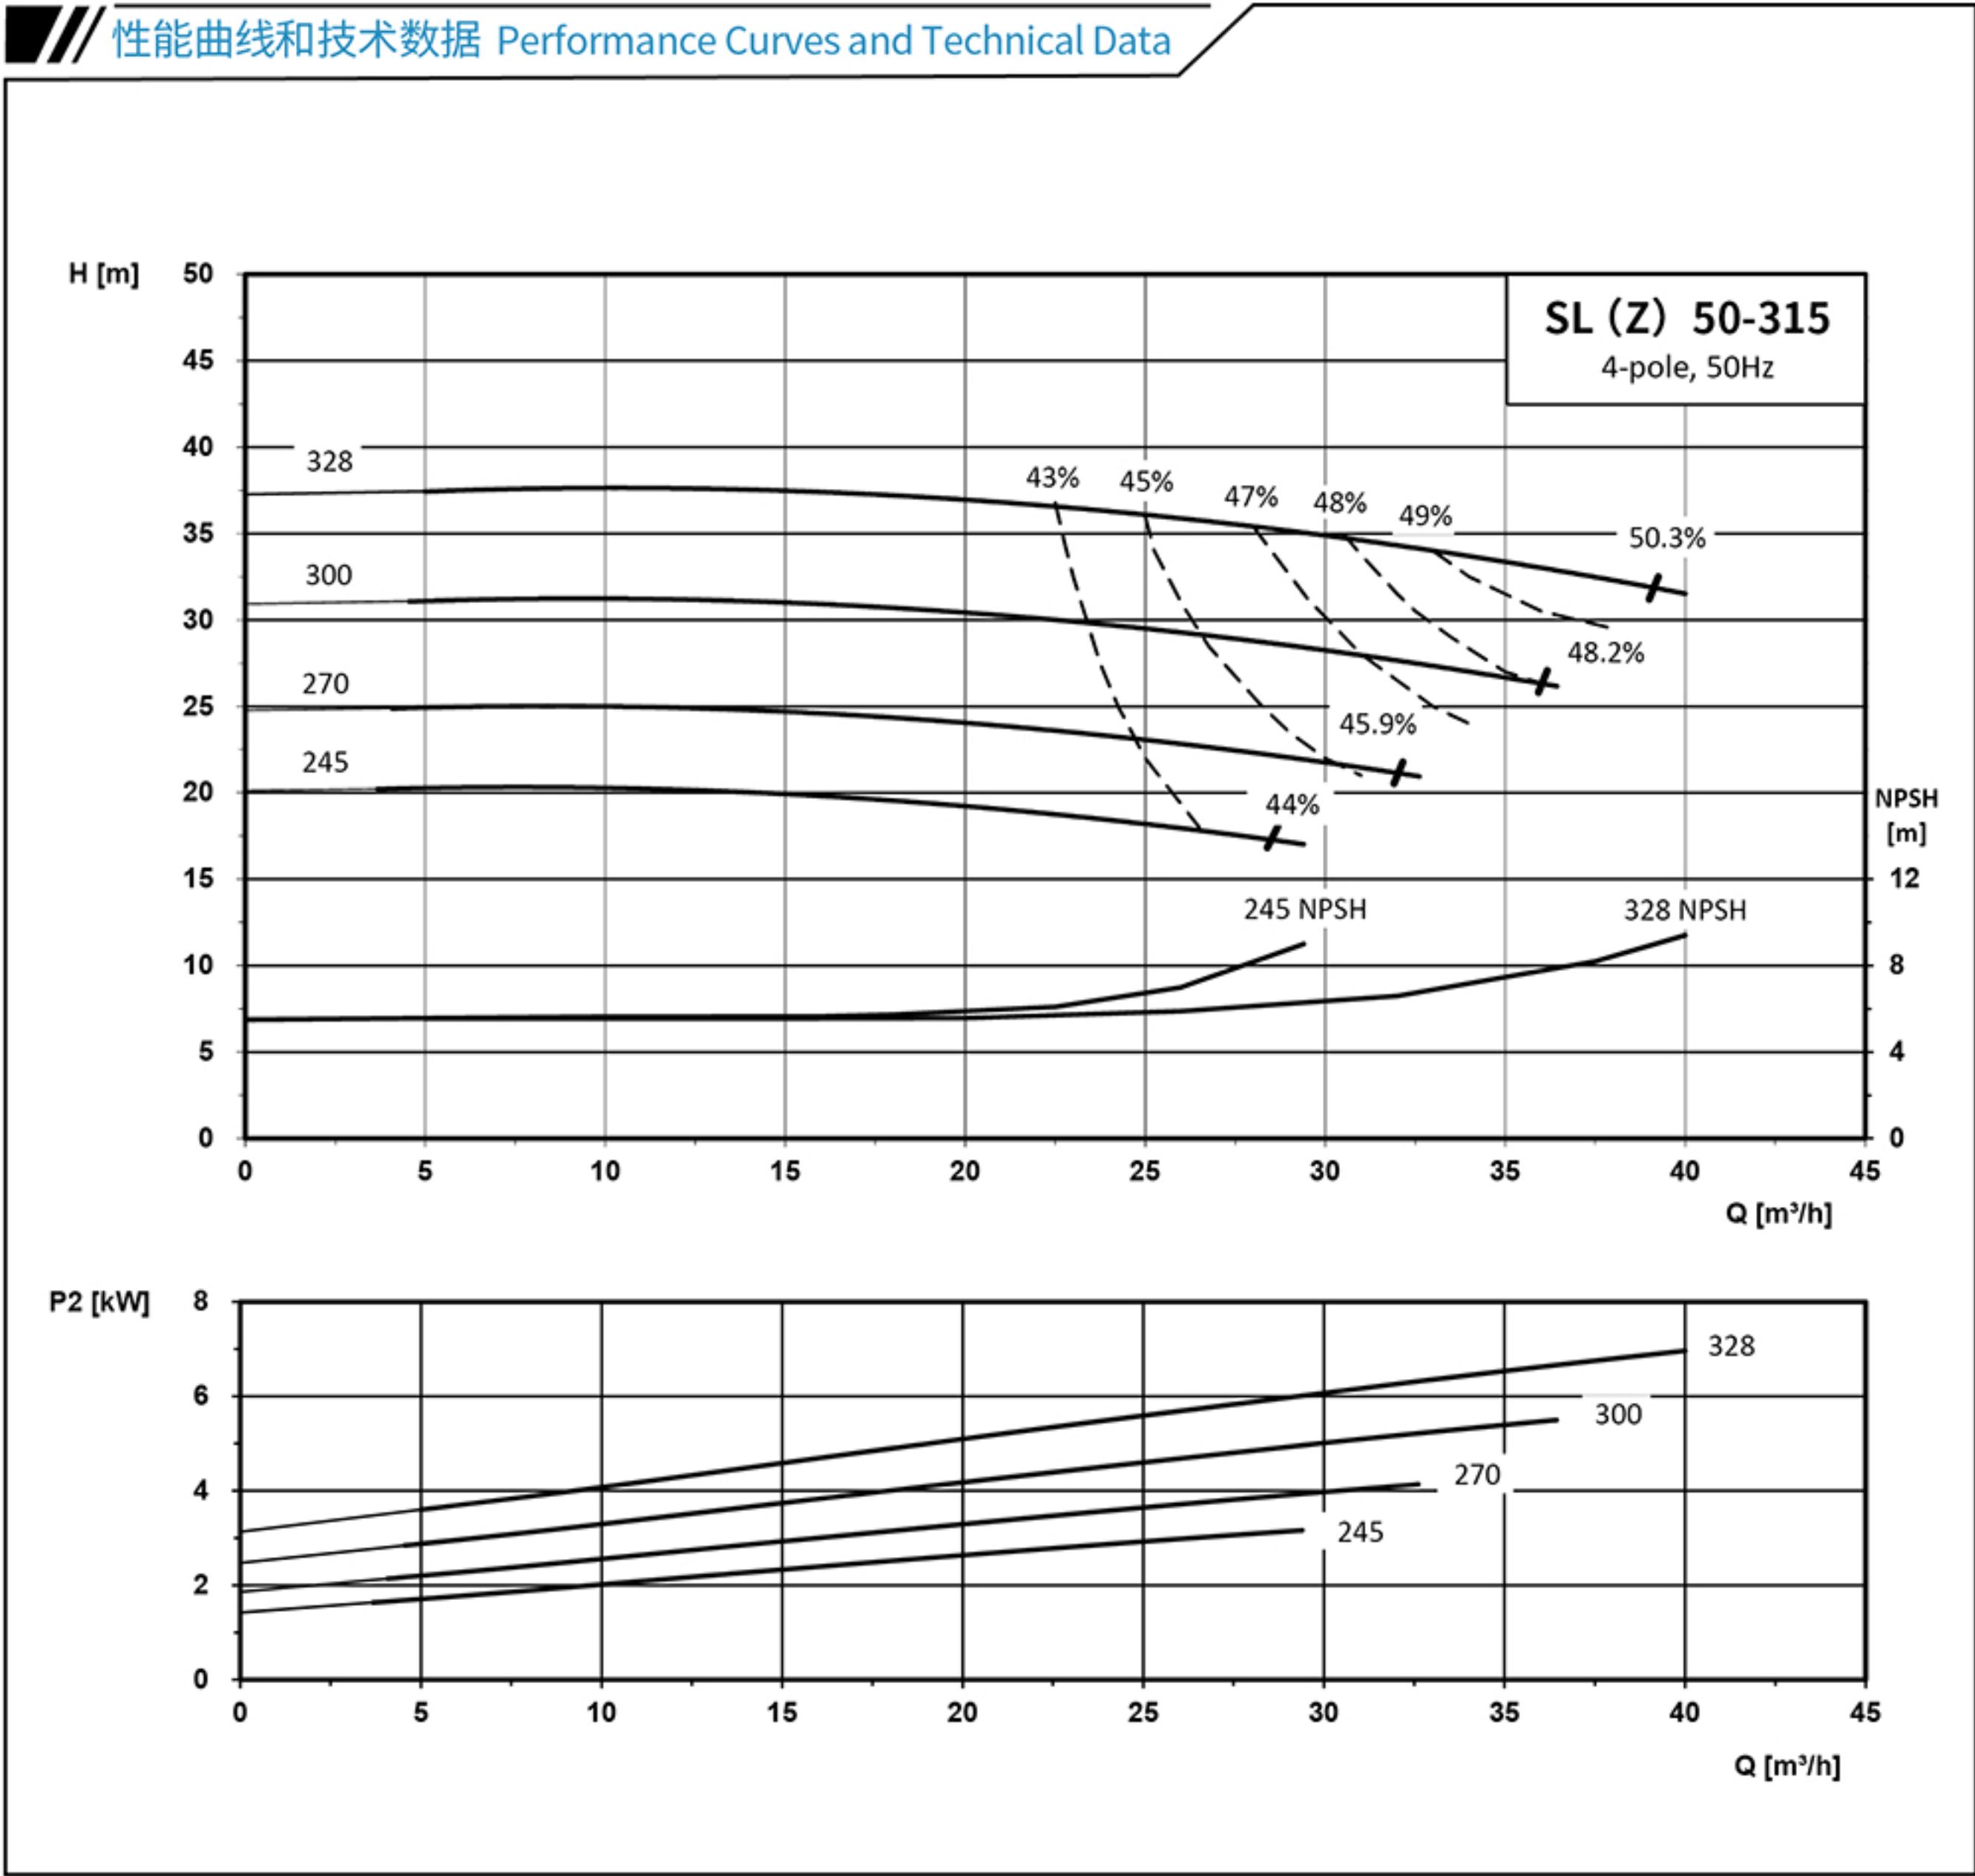

泵型号	Pump Model	SL50-315-3-4	SL50-315-4-4	SL(Z)50-315-5.5-4	SL(Z)50-315-7.5-4
电机型号	Motor Model	YE3-100L2-4	YE3-112M-4	YE3-132S-4	YE3-132M-4
电机功率(kW)	Motor Power(kW)	3	4	5.5	7.5
叶轮直径(mm)	Impeller Diameter(mm)	245	270	300	328


SL(Z) 65-315

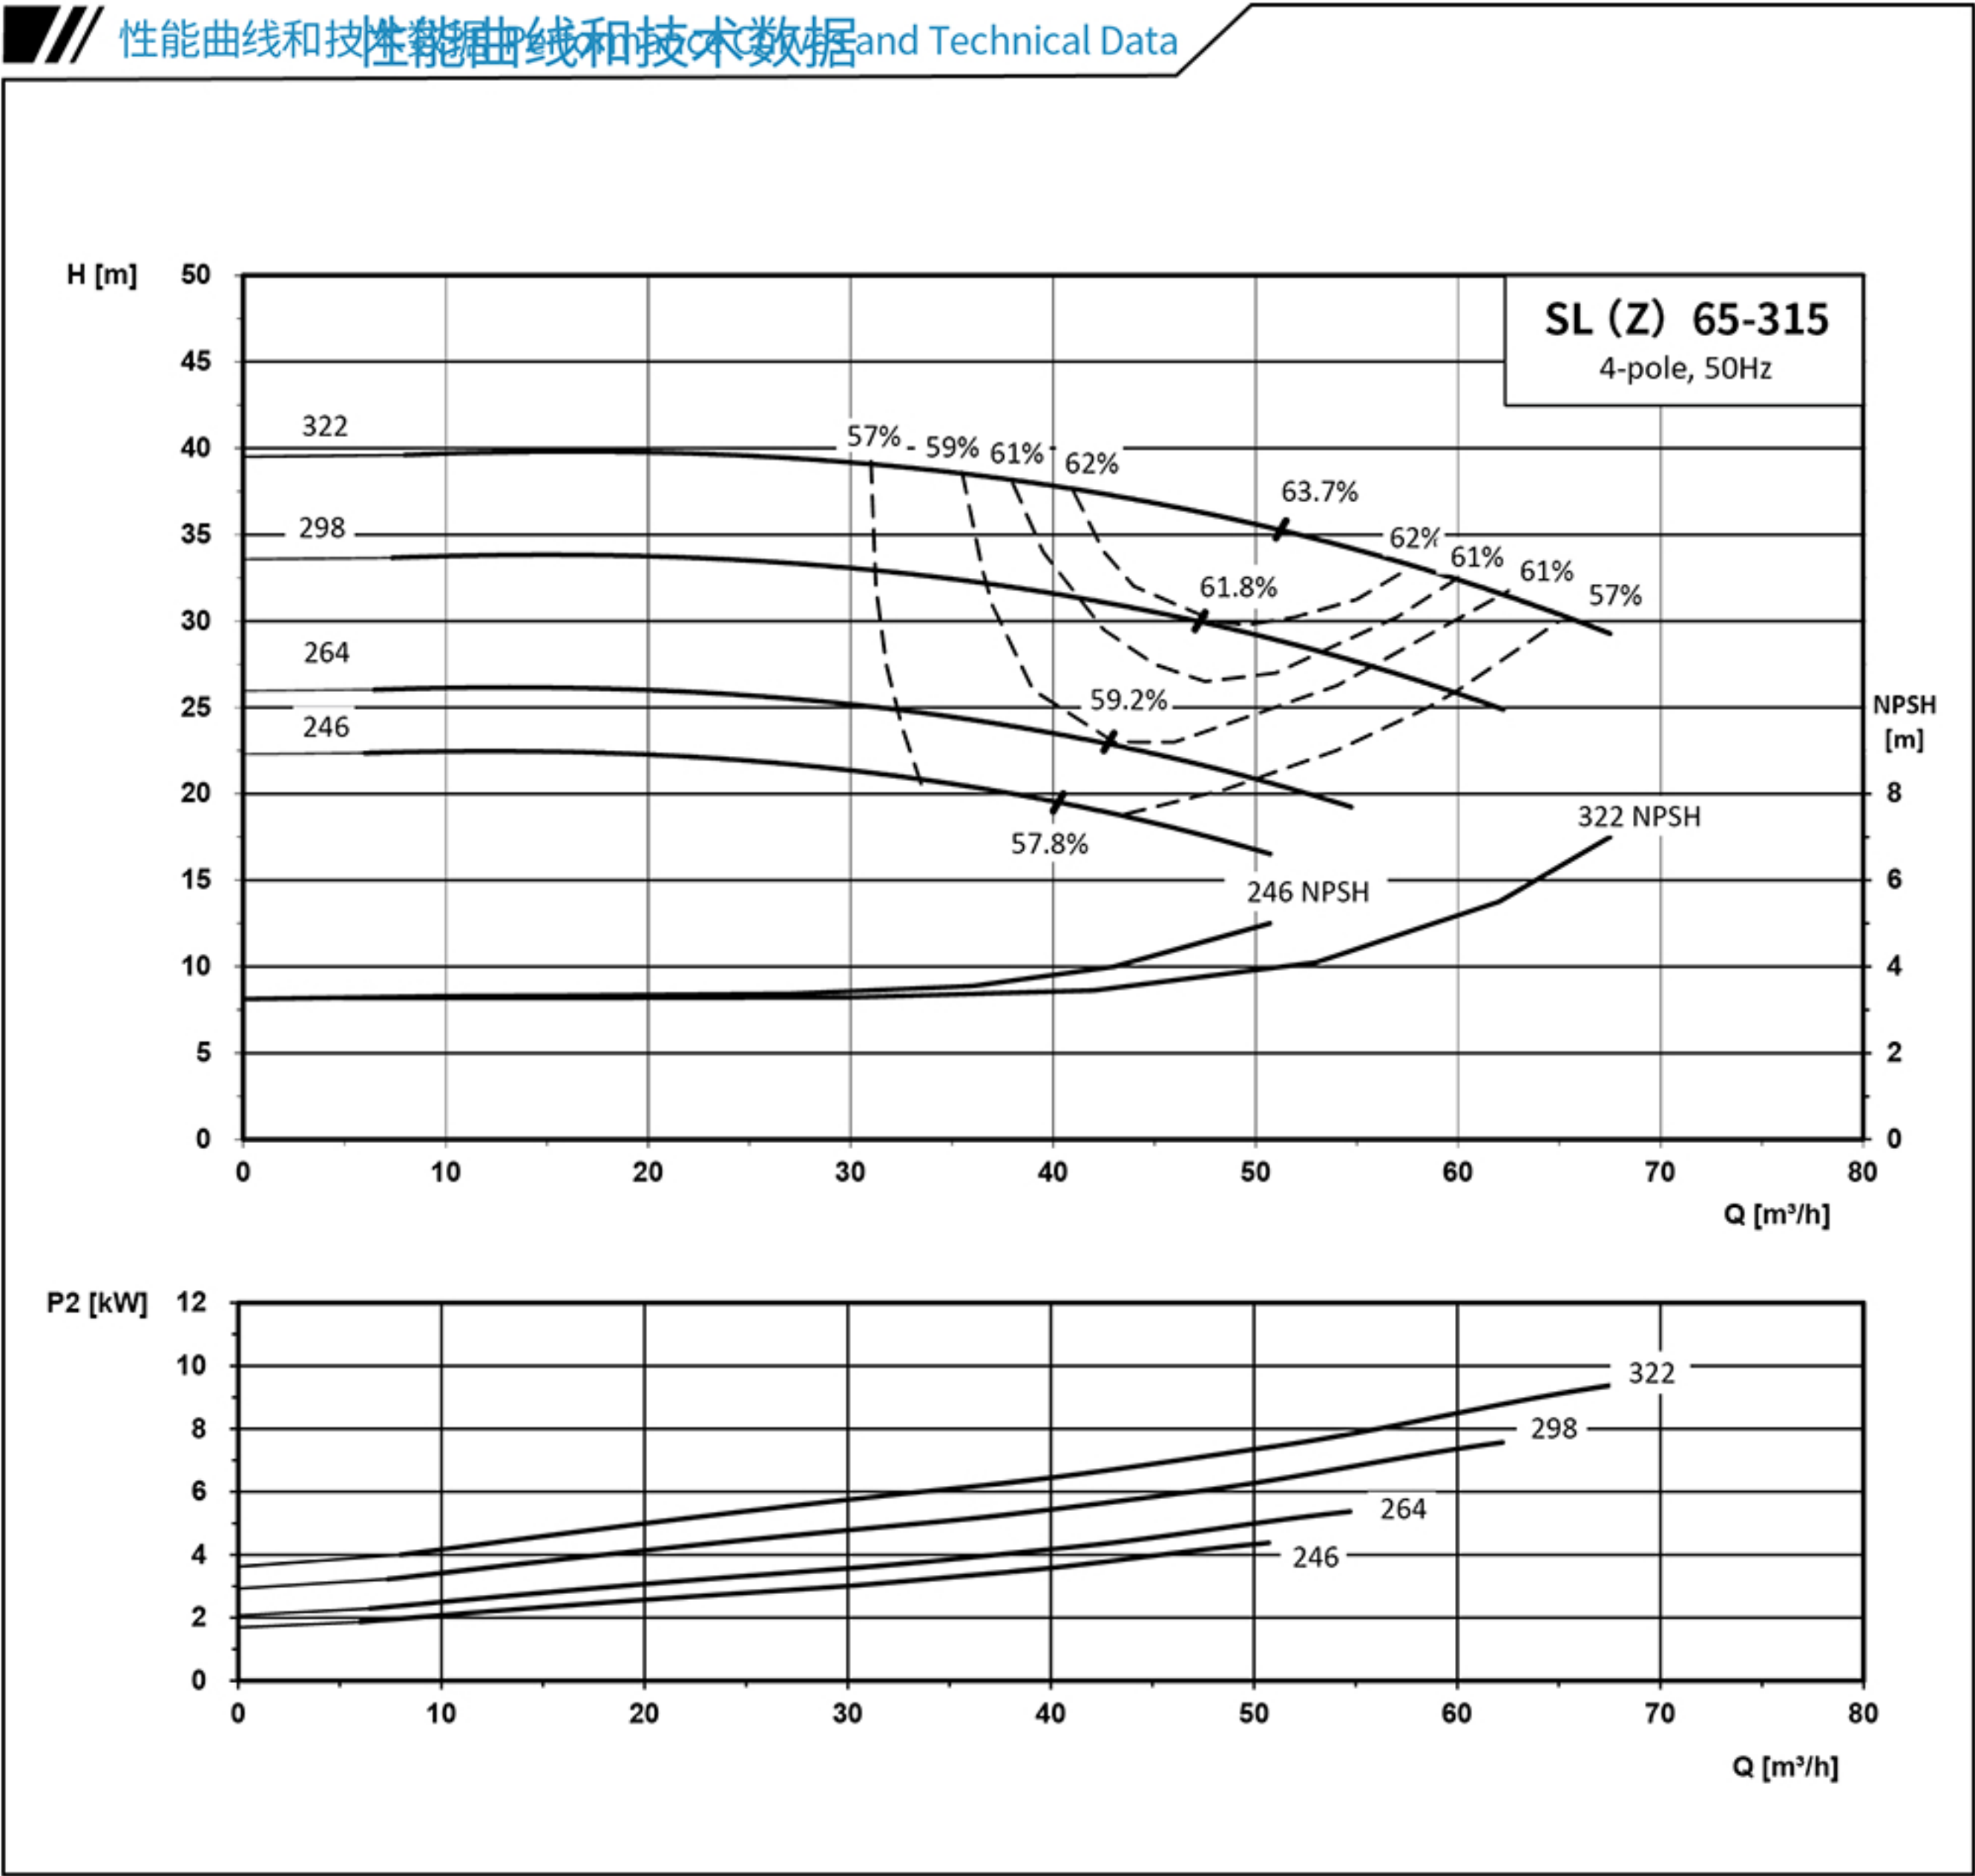

泵型号	Pump Model	SL65-315-4-4	SL(Z)65-315-5.5-4	SL(Z)65-315-7.5-4	SL(Z)65-315-9.2-4
电机型号	Motor Model	YE3-112M-4	YE3-132S-4	YE3-132M-4	YE3-132L-4
电机功率(kW)	Motor Power(kW)	4	5.5	7.5	9.2
叶轮直径(mm)	Impeller Diameter(mm)	246	264	298	322

SL(Z) 80-315


性能曲线和技术数据 Performance Curves and Technical Data

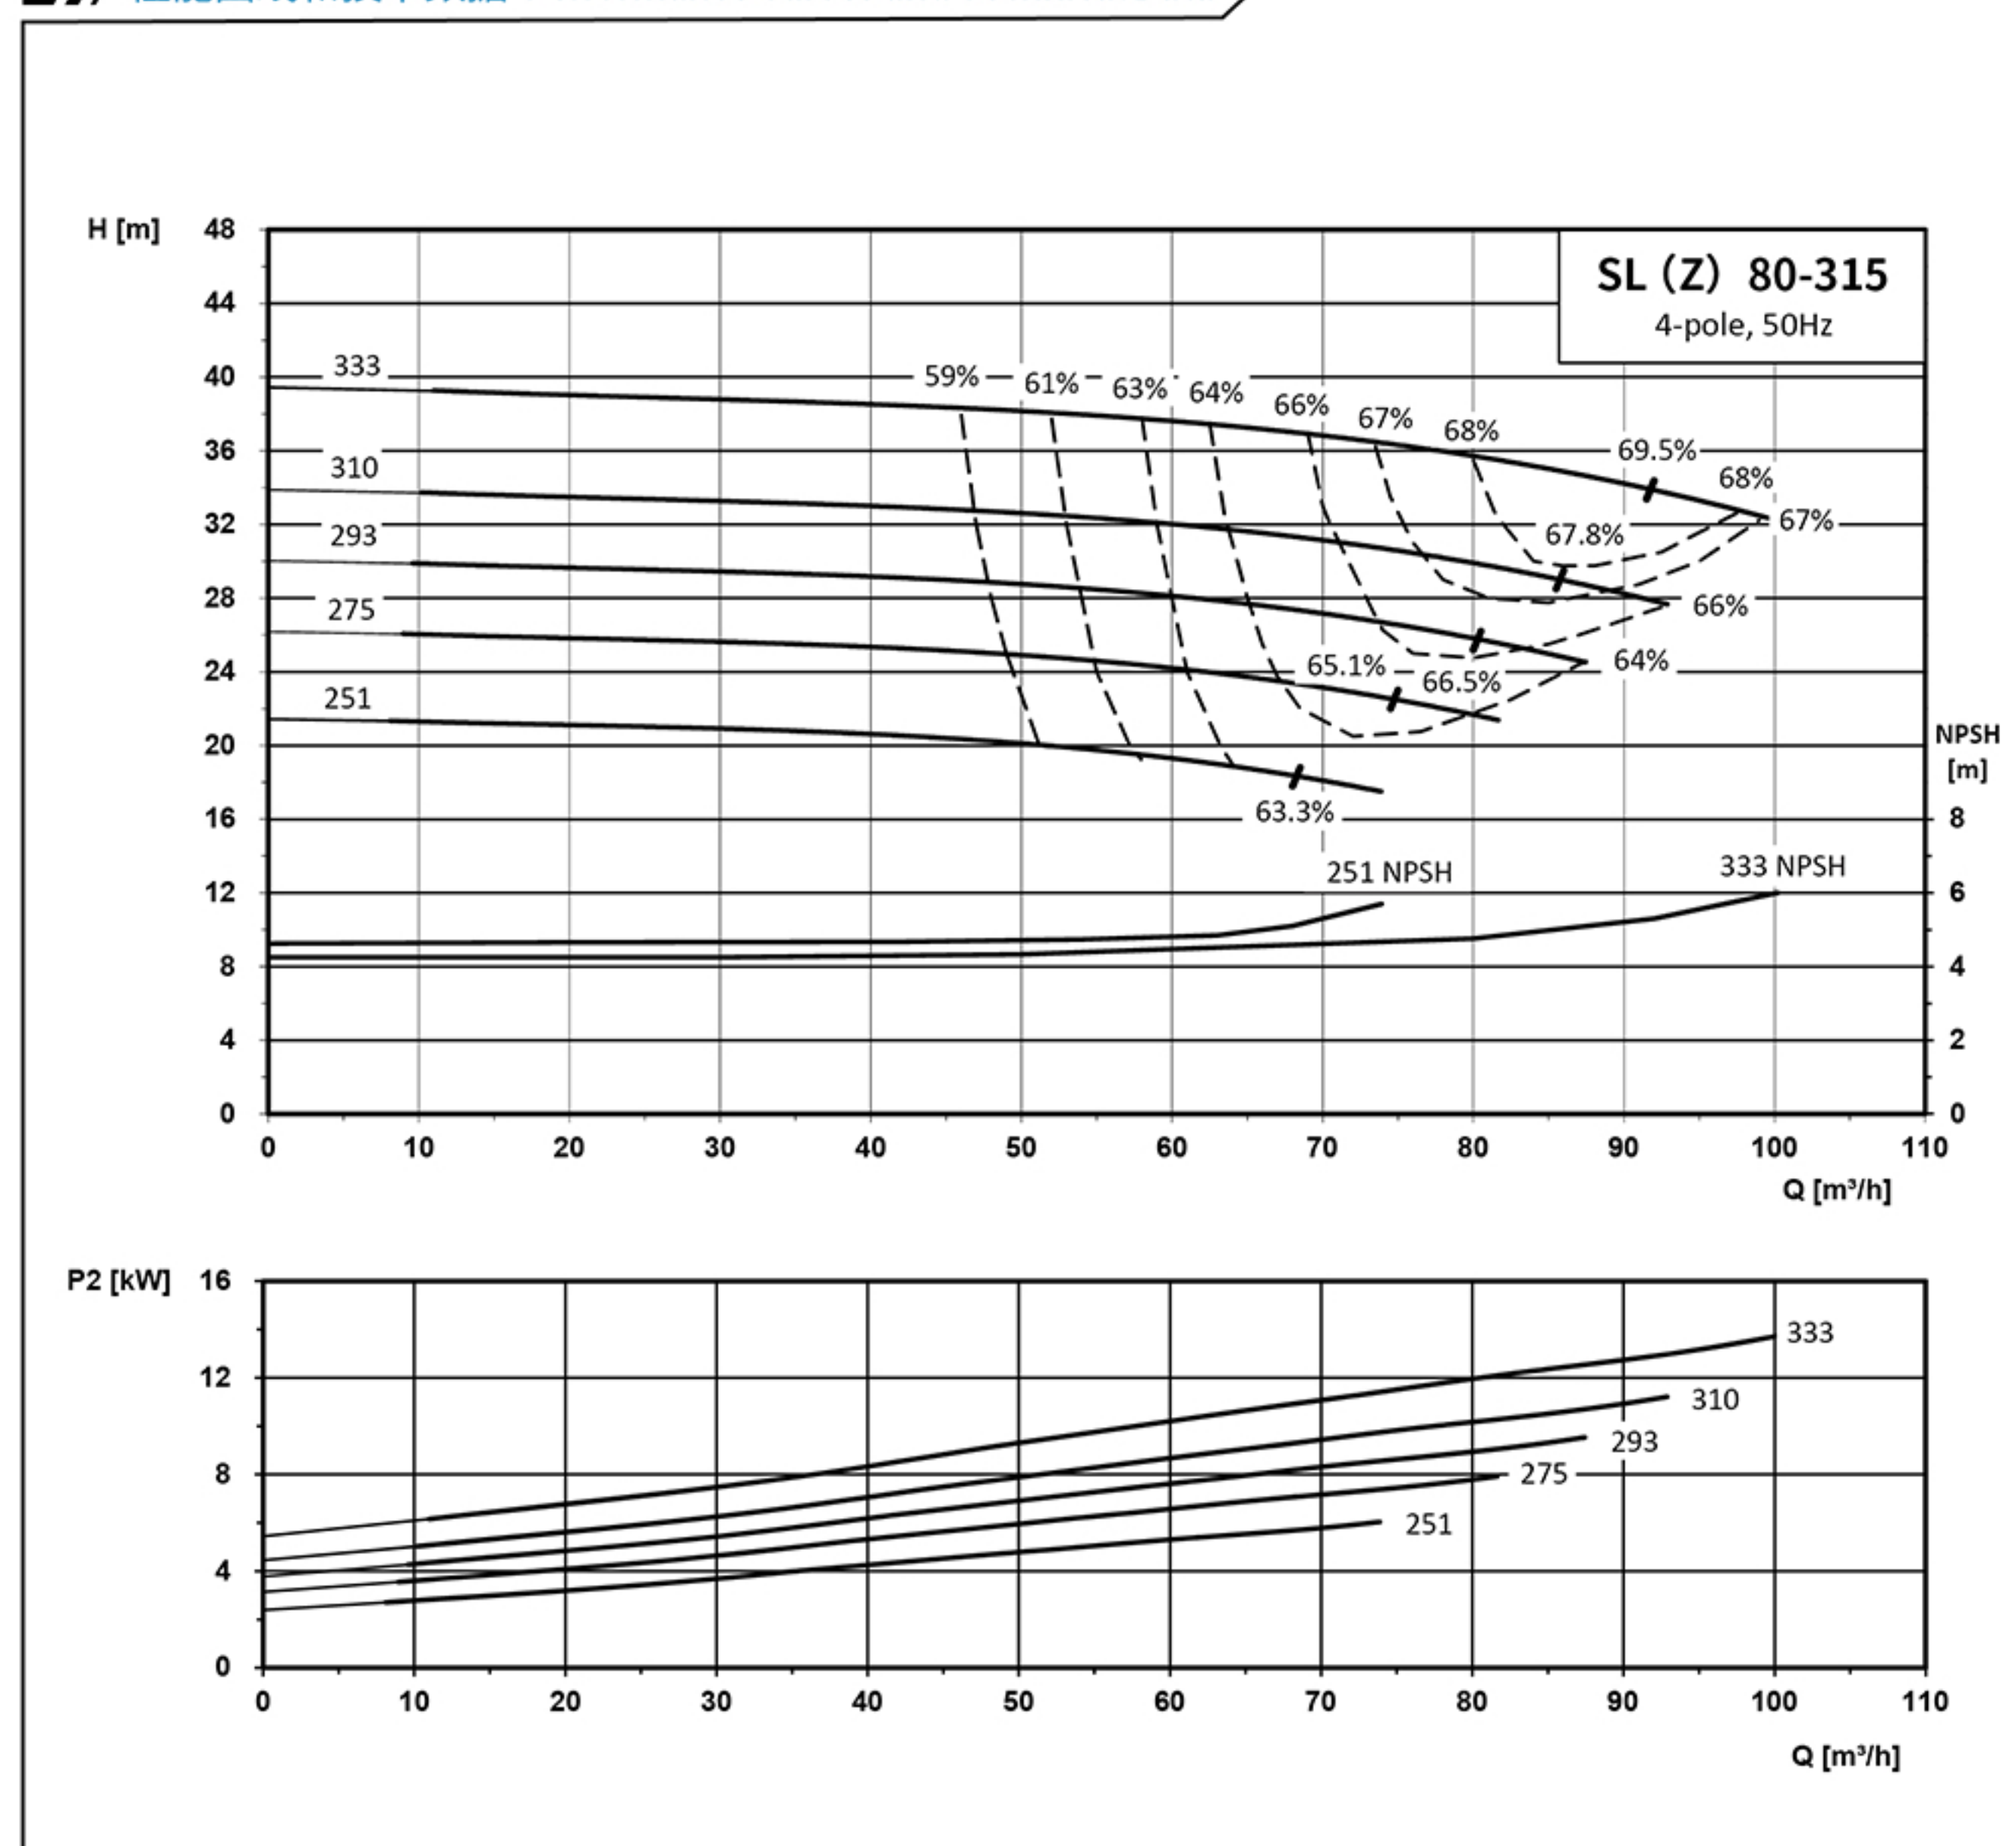

泵型号	Pump Model	SL(Z)80-315-5.5-4	SL(Z)80-315-7.5-4	SL(Z)80-315-9.2-4	SL(Z)80-315-11-4	SL(Z)80-315-15-4
电机型号	Motor Model	YE3-132S-4	YE3-132M-4	YE3-132L-4	YE3-160M-4	YE3-160L-4
电机功率(kW)	Motor Power(kW)	5.5	7.5	9.2	11	15
叶轮直径(mm)	Impeller Diameter(mm)	251	275	293	310	333


SL(Z) 100-315

性能曲线和技术数据 Performance Curves and Technical Data

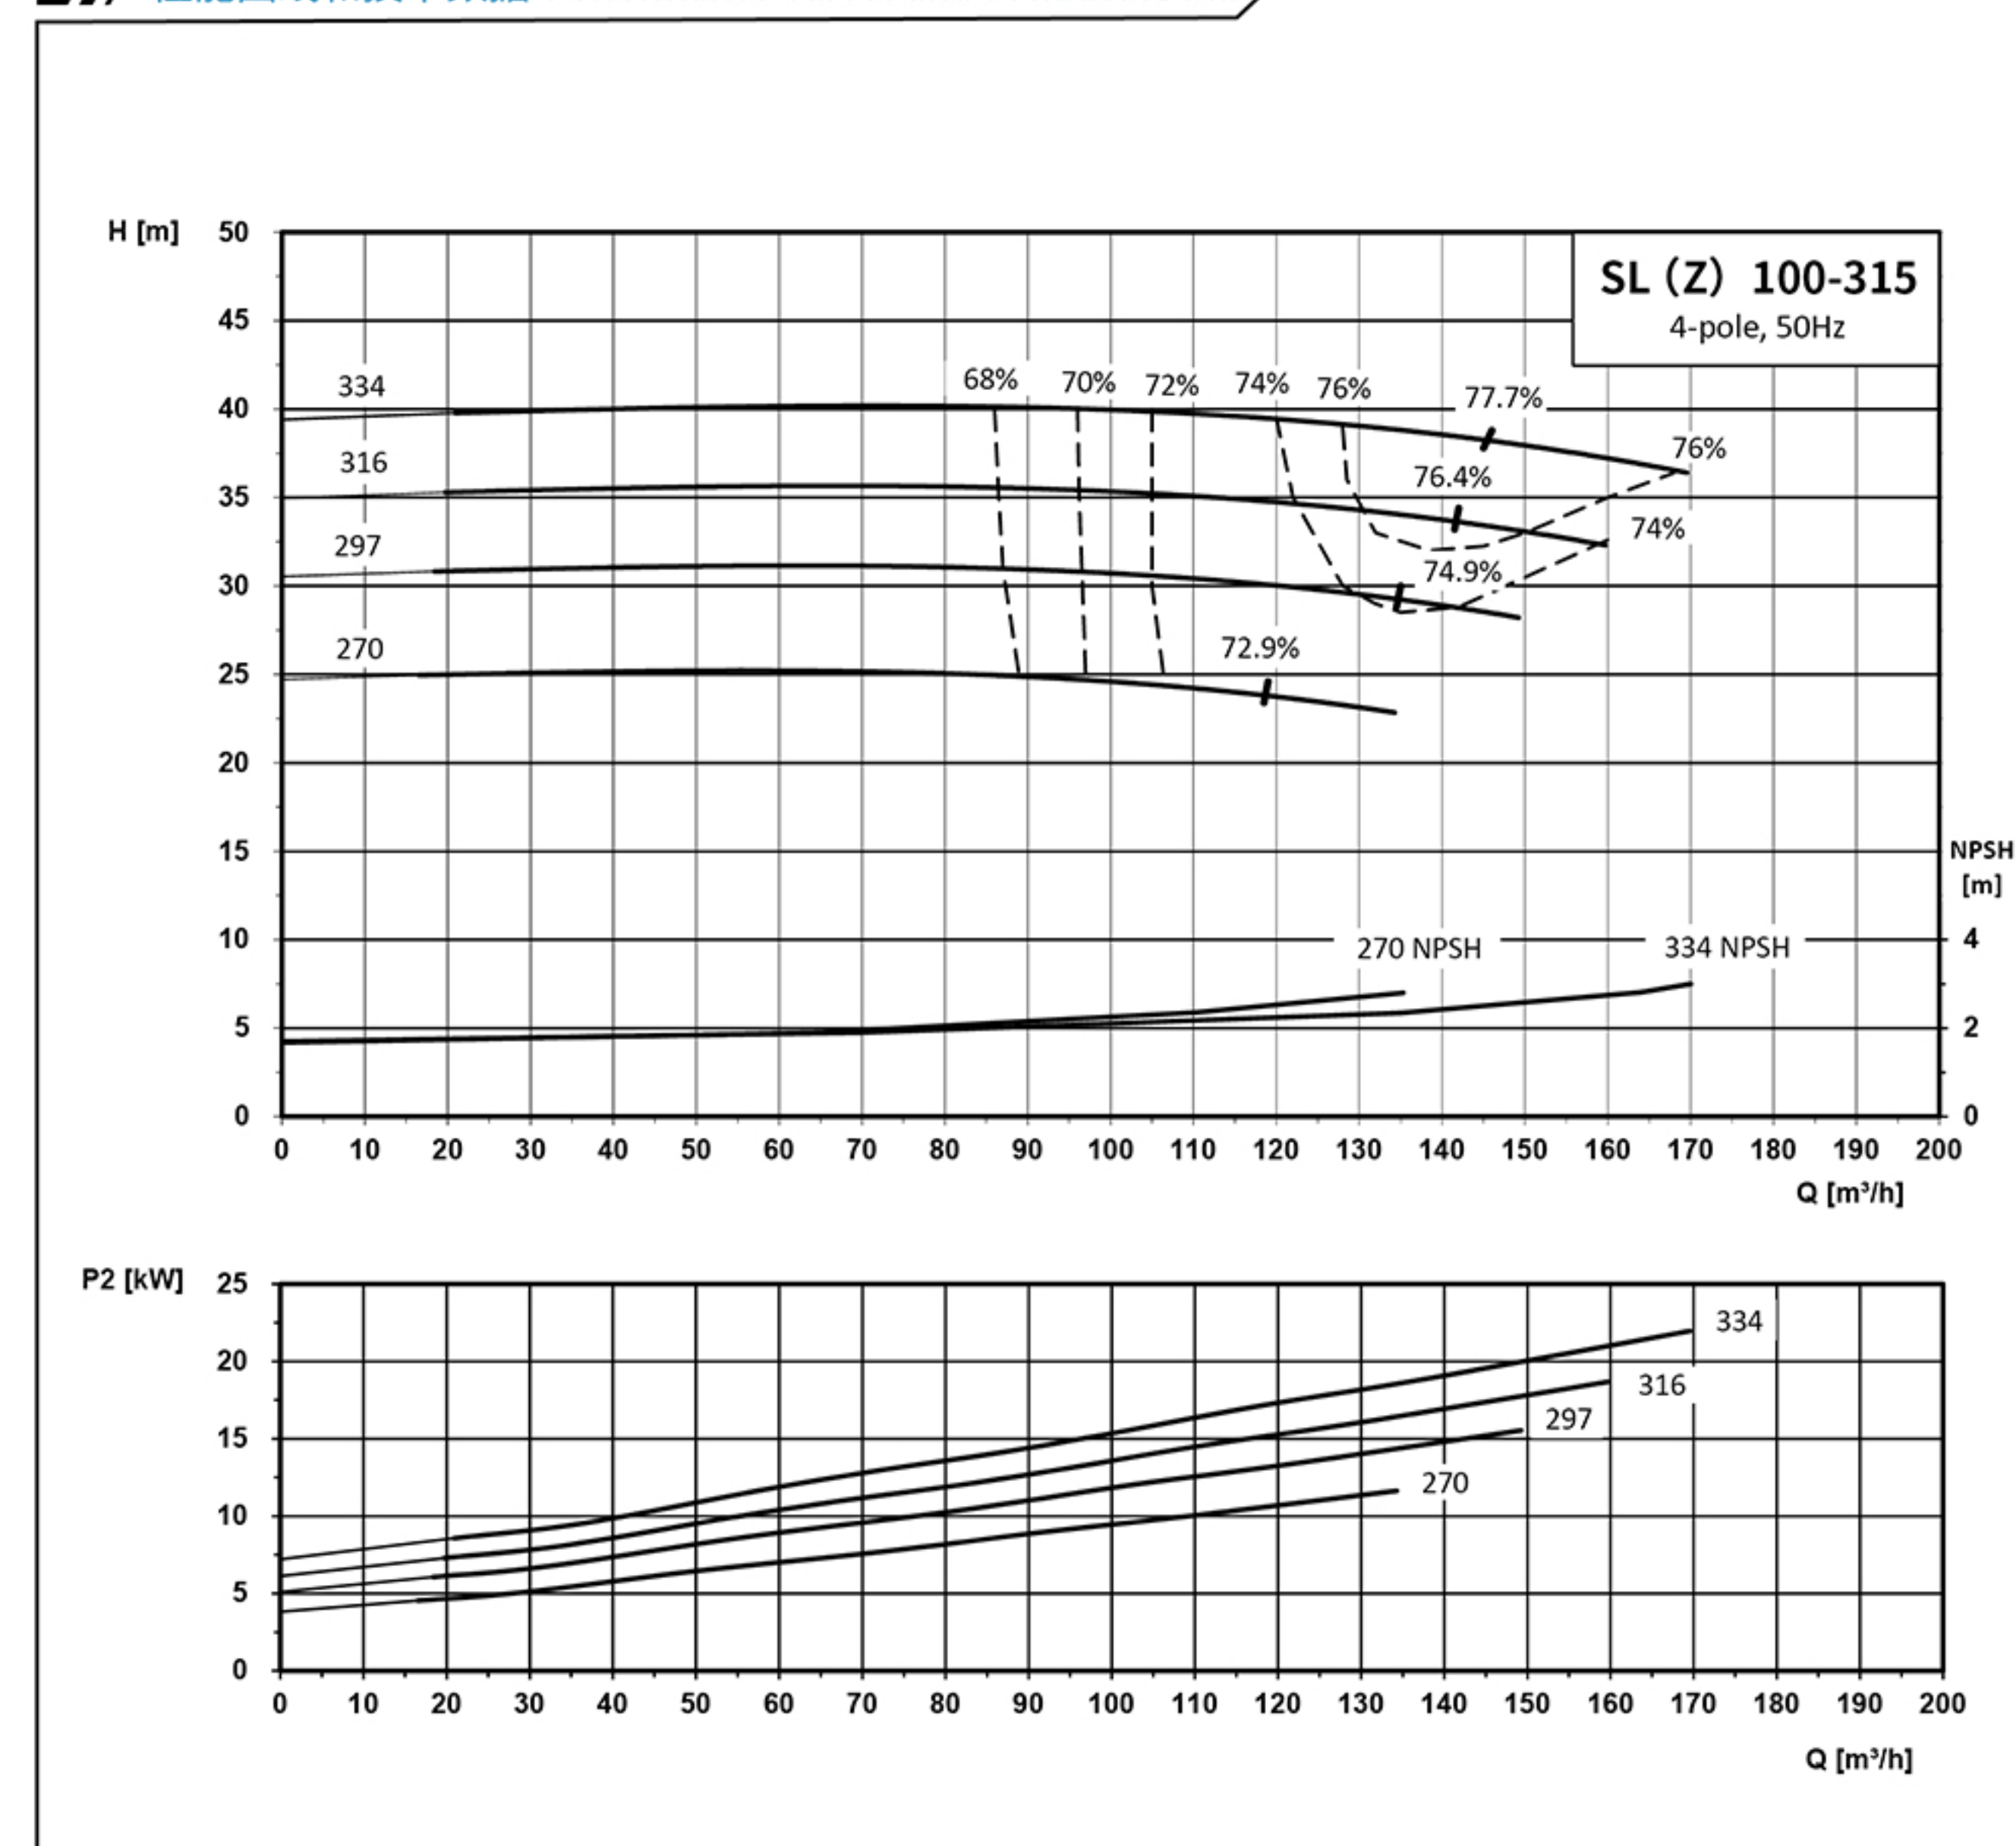


泵型号	Pump Model	SL(Z)100-315-11-4	SL(Z)100-315-15-4	SL(Z)100-315-18.5-4	SL(Z)100-315-22-4
电机型号	Motor Model	YE3-160M-4	YE3-160L-4	YE3-180M-4	YE3-180L-4
电机功率(kW)	Motor Power(kW)	11	15	18.5	22
叶轮直径(mm)	Impeller Diameter(mm)	270	297	316	334

SL(Z) 125-315

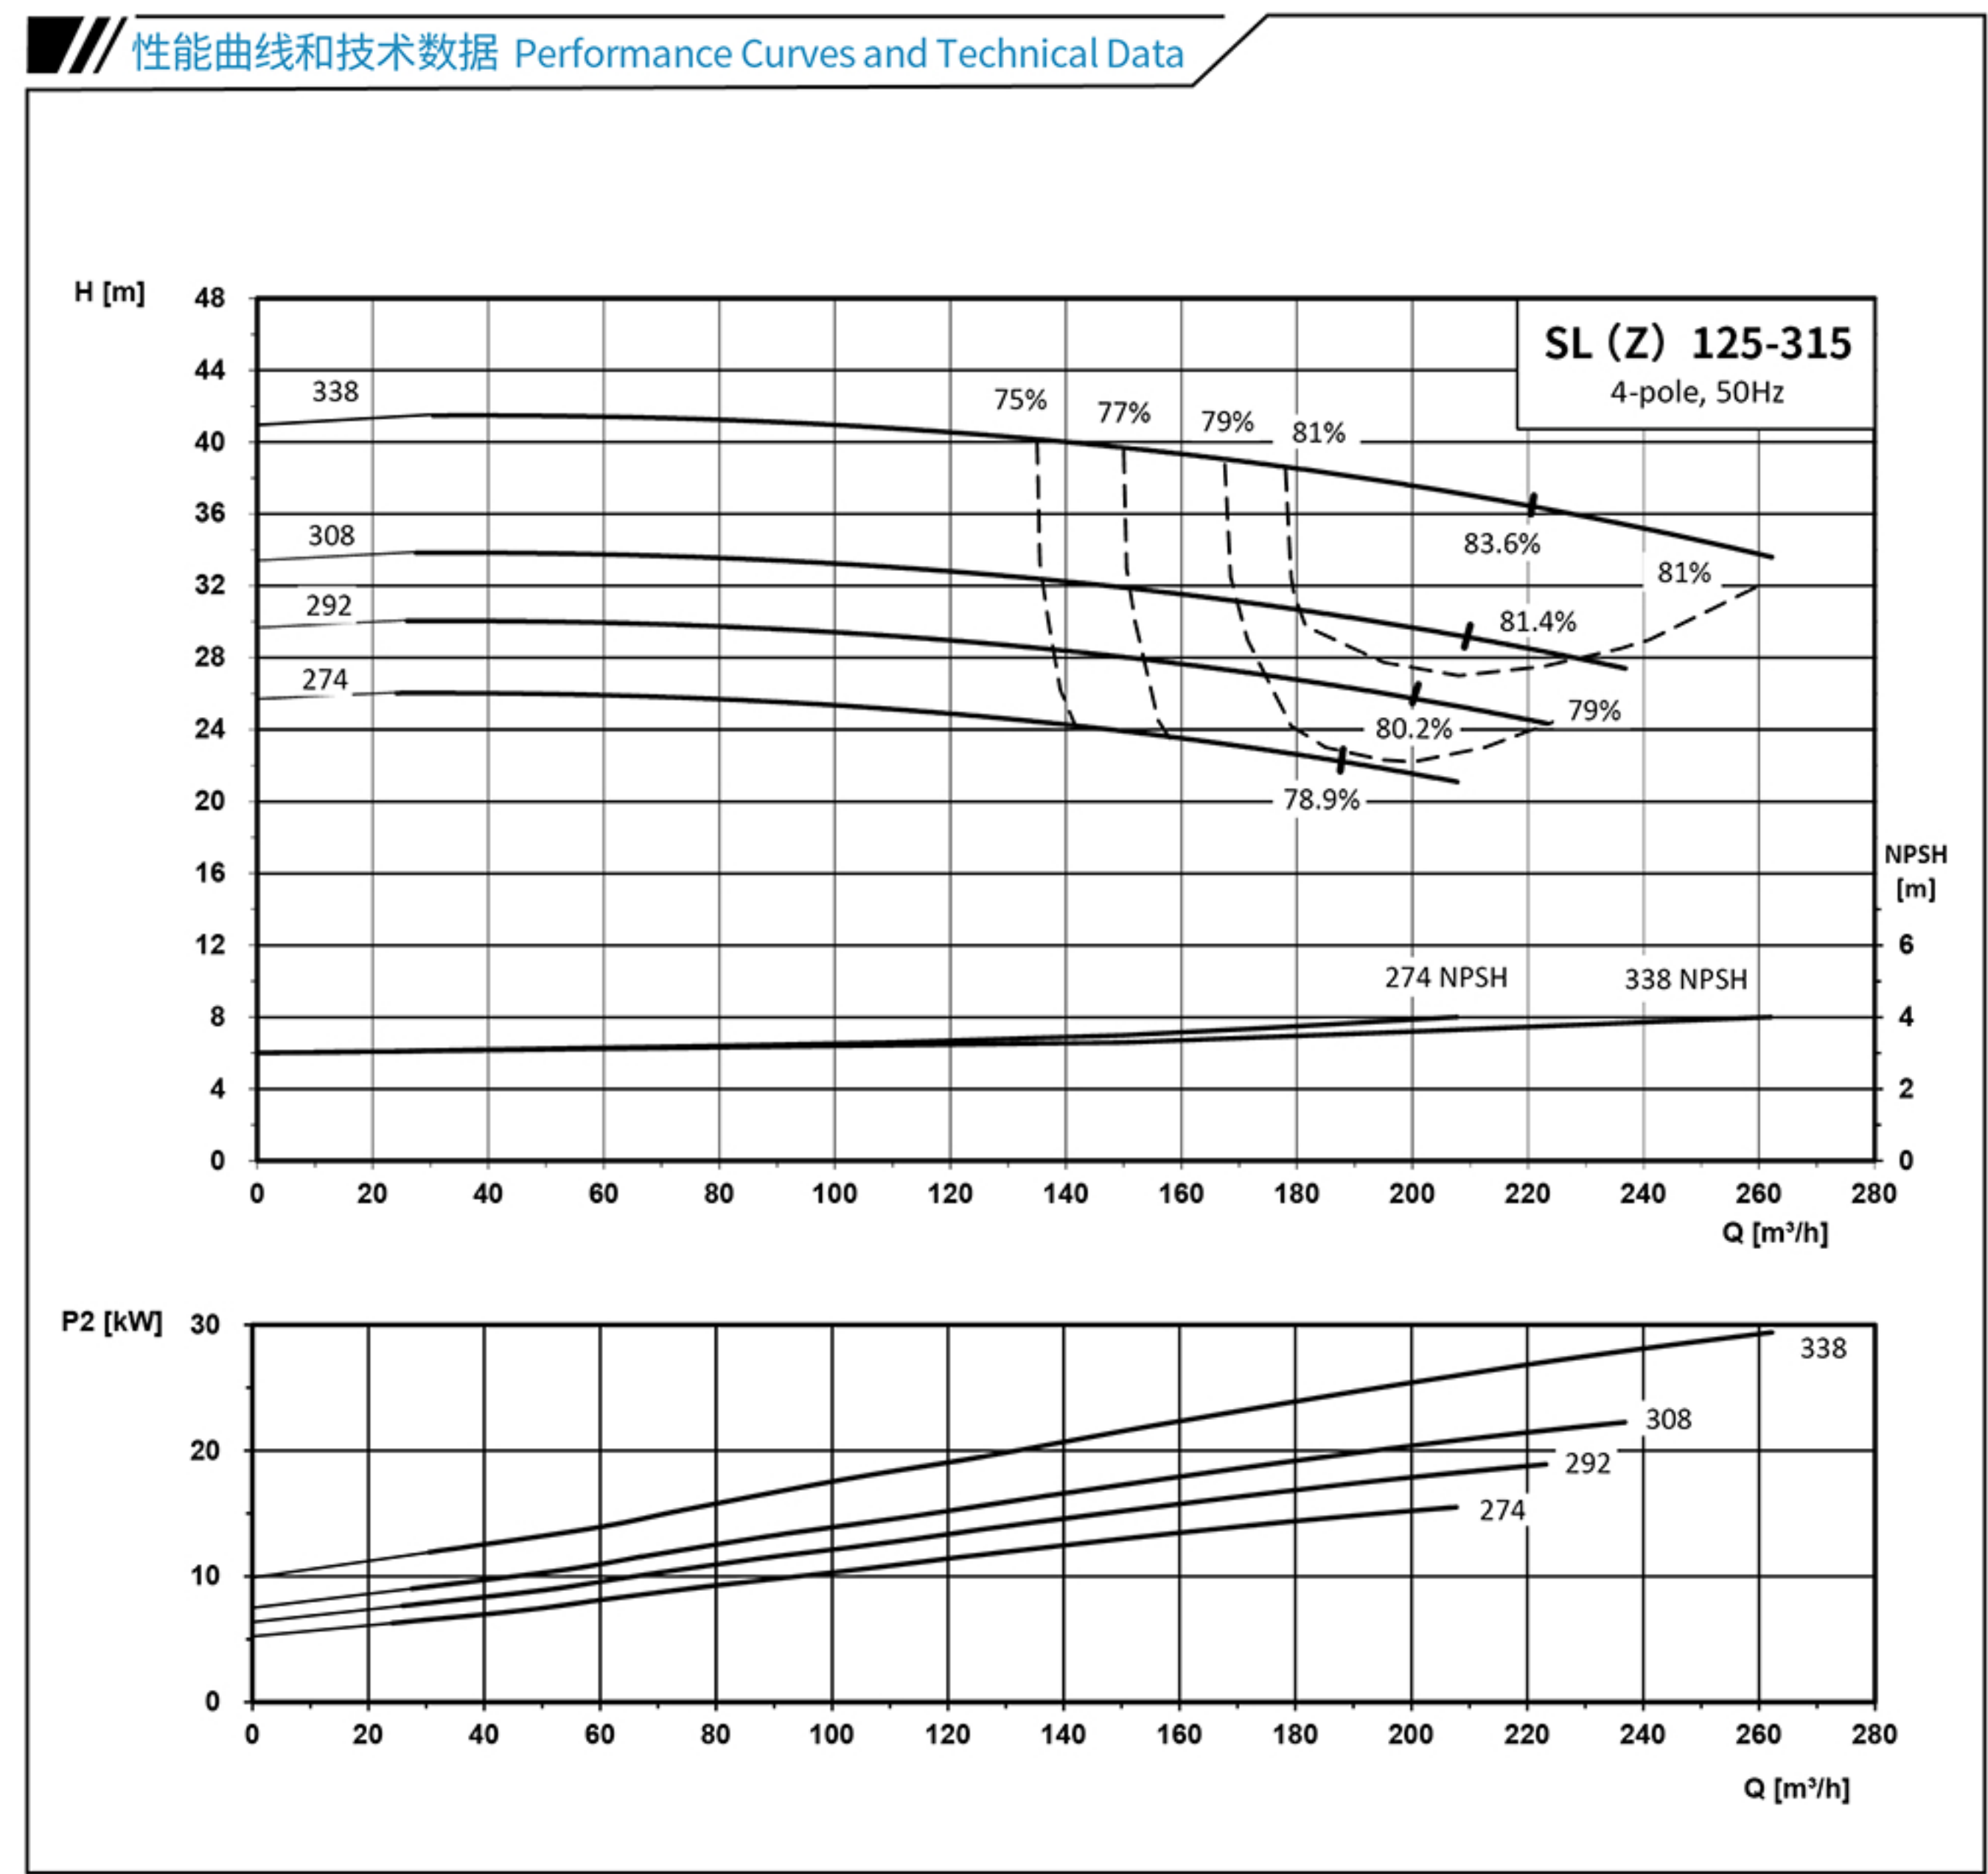


泵型号	Pump Model	SL(Z)125-315-15-4	SL(Z)125-315-18.5-4	SL(Z)125-315-22-4	SL(Z)125-315-30-4
电机型号	Motor Model	YE3-160L-4	YE3-180M-4	YE3-180L-4	YE3-200L-4
电机功率(kW)	Motor Power(kW)	15	18.5	22	30
叶轮直径(mm)	Impeller Diameter(mm)	274	292	308	338

SL(Z) 150-315

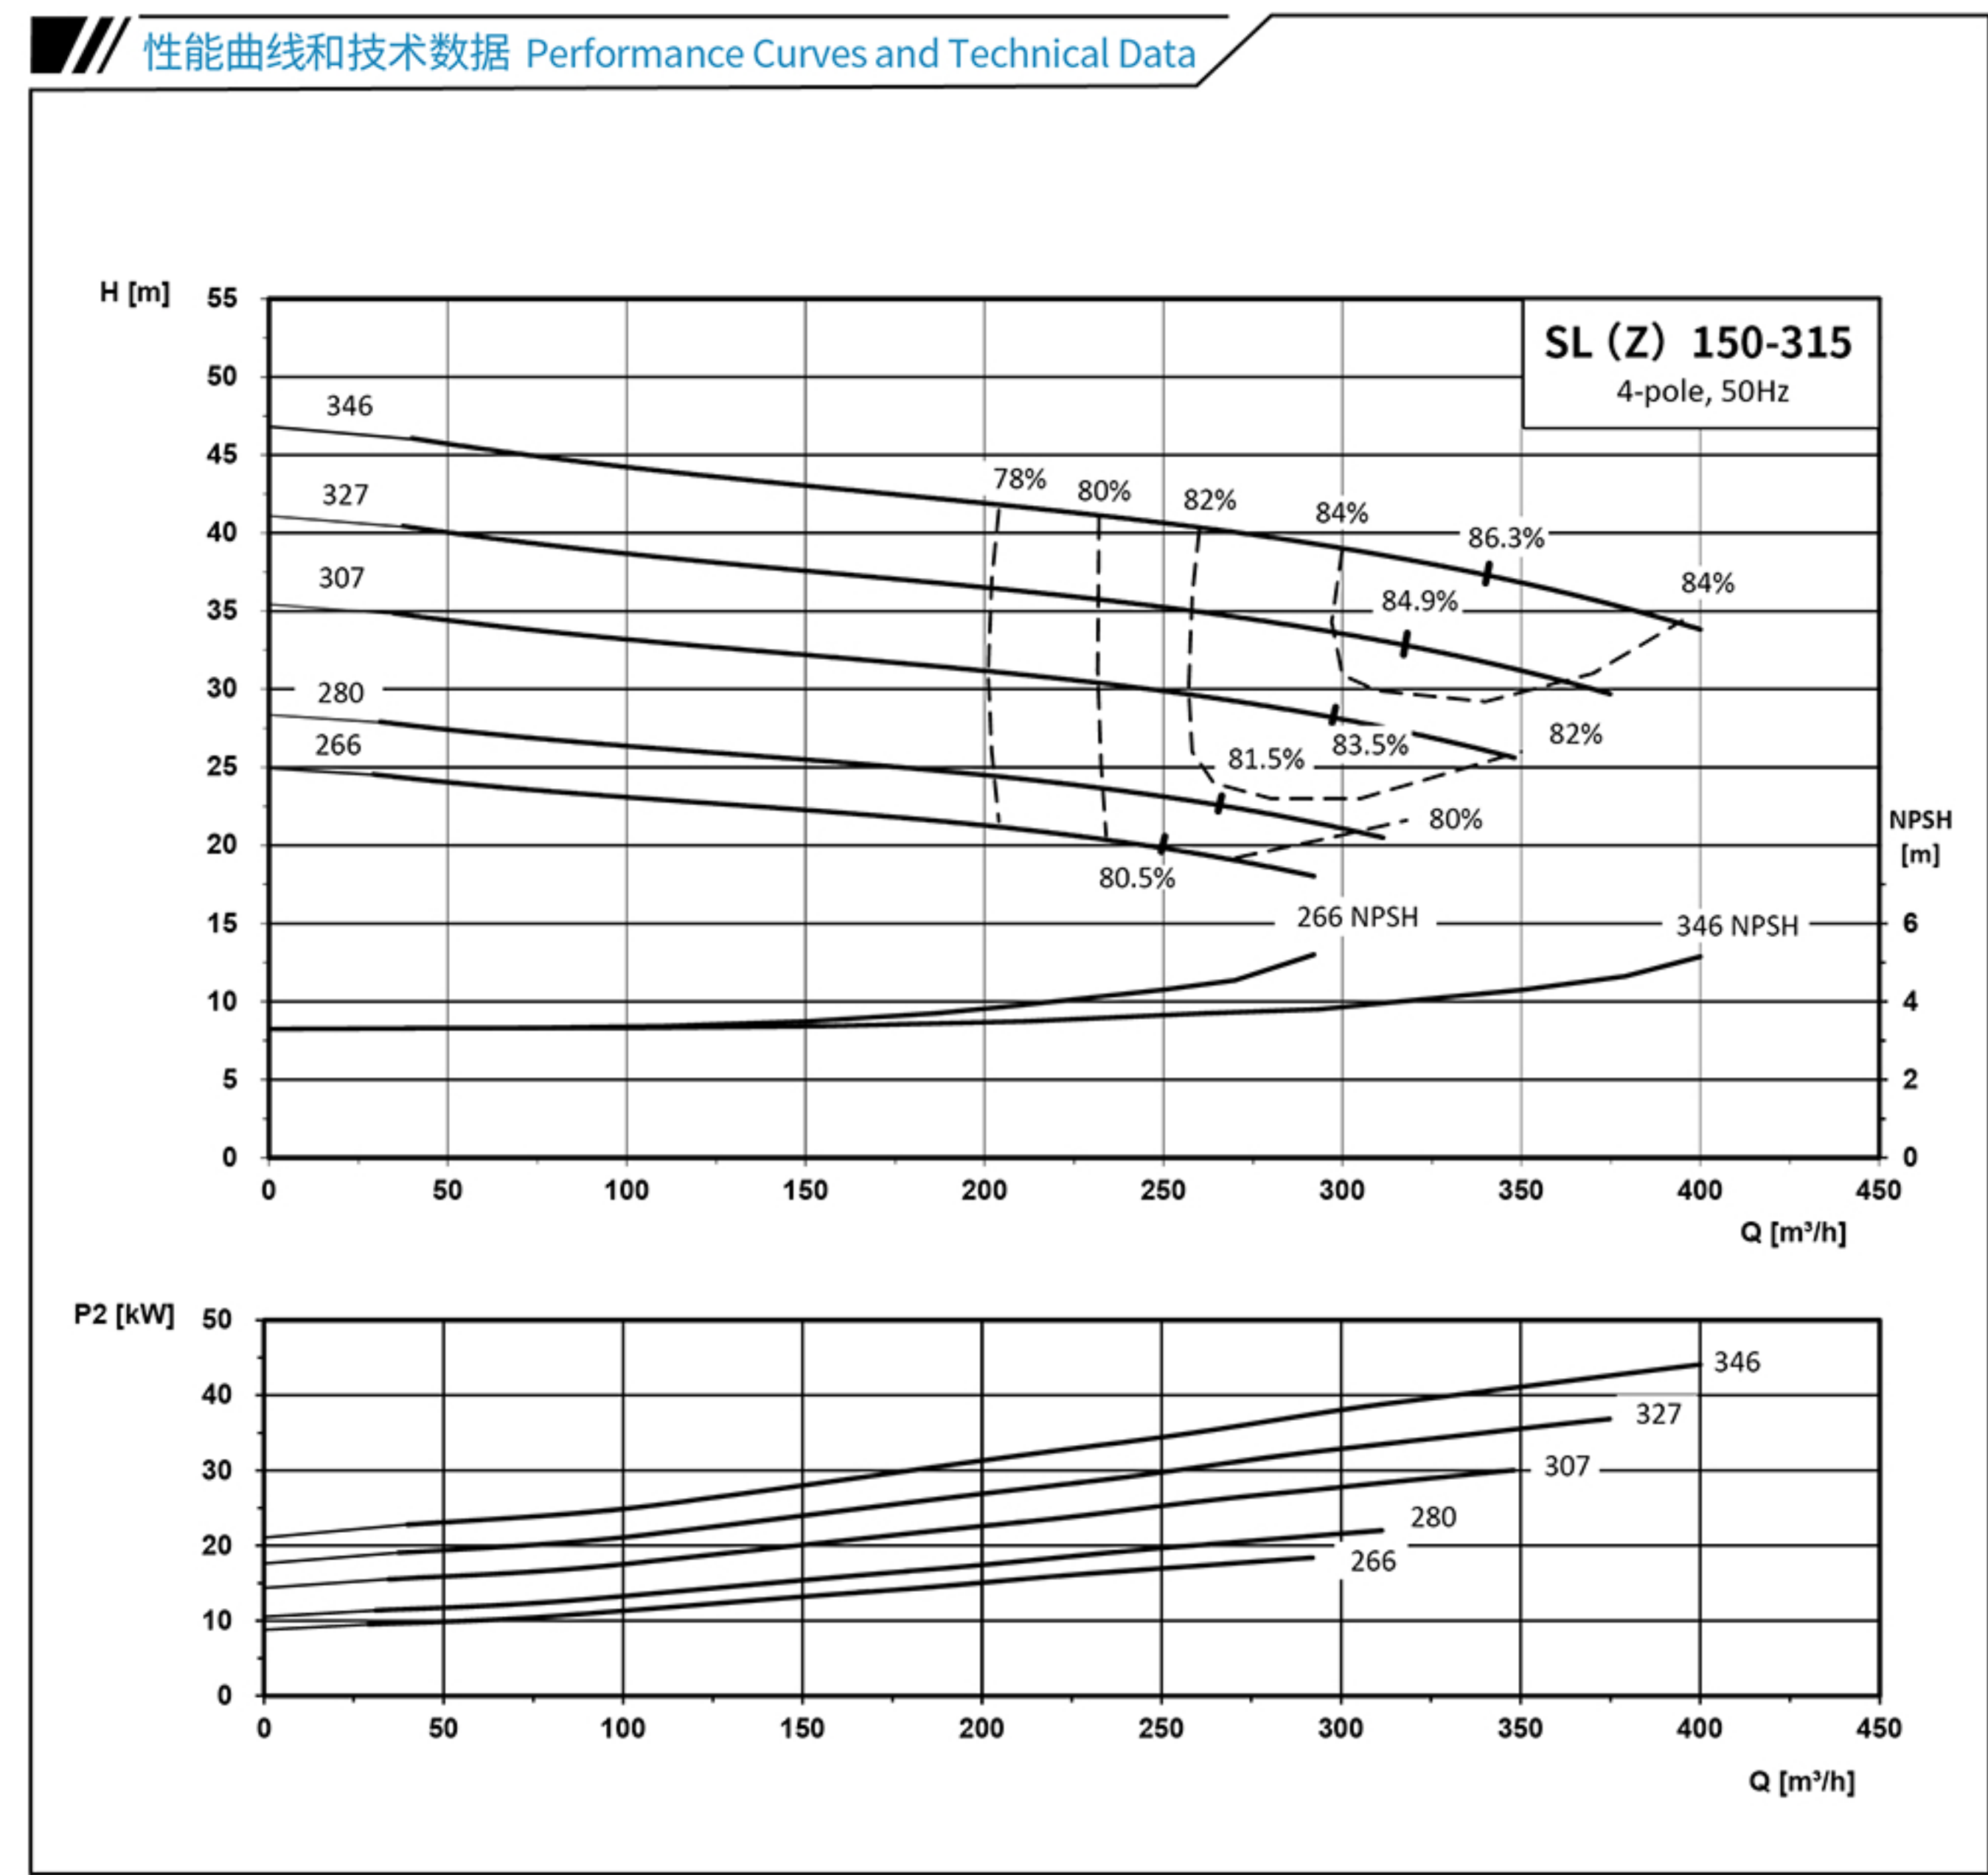


泵型号	Pump Model	SL(Z)150-315-18.5-4	SL(Z)150-315-22-4	SL(Z)150-315-30-4	SL(Z)150-315-37-4	SL(Z)150-315-45-4
电机型号	Motor Model	YE3-180M-4	YE3-180L-4	YE3-200L-4	YE3-225S-4	YE3-225M-4
电机功率(kW)	Motor Power(kW)	18.5	22	30	37	45
叶轮直径(mm)	Impeller Diameter(mm)	266	280	307	327	346

SL(Z) 200-315

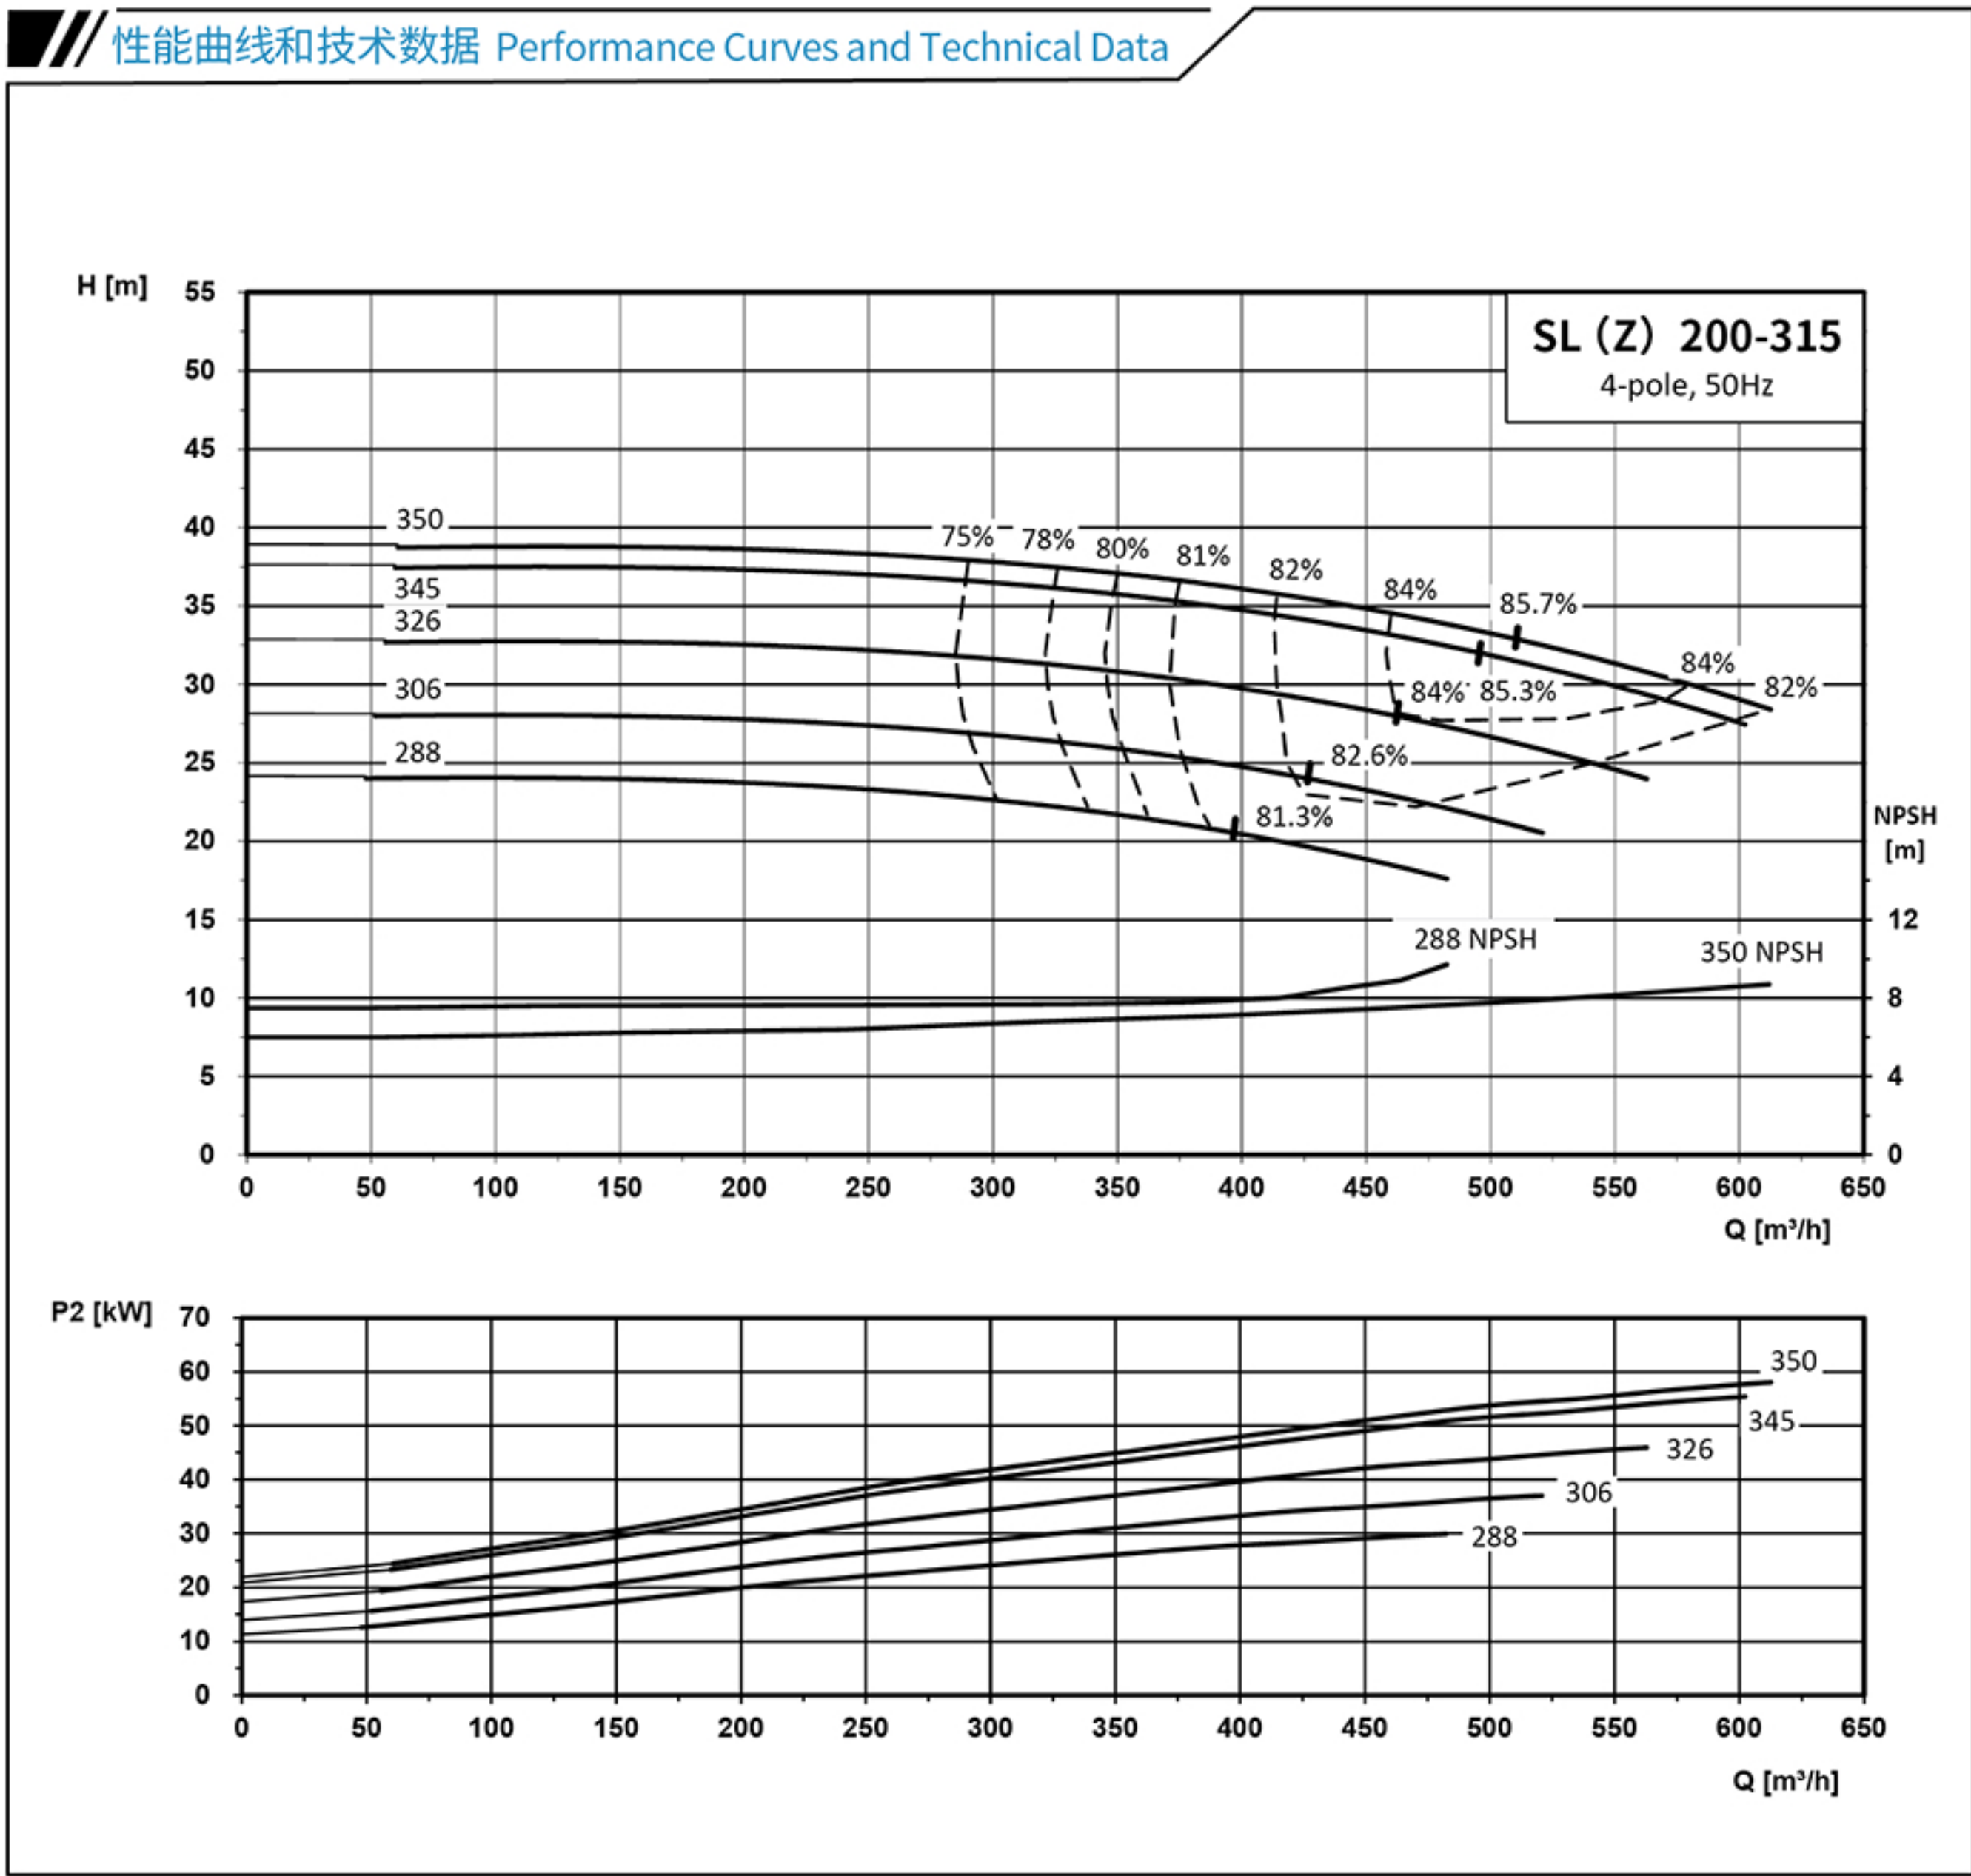


泵型号	Pump Model	SL(Z)200-315-30-4	SL(Z)200-315-37-4	SL(Z)200-315-45-4	SL(Z)200-315-55-4	SL(Z)200-315-75-4
电机型号	Motor Model	YE3-200L-4	YE3-225S-4	YE3-225M-4	YE3-250M-4	YE3-280S-4
电机功率(kW)	Motor Power(kW)	30	37	45	55	75
叶轮直径(mm)	Impeller Diameter(mm)	288	306	326	345	350

SL(Z) 100-400

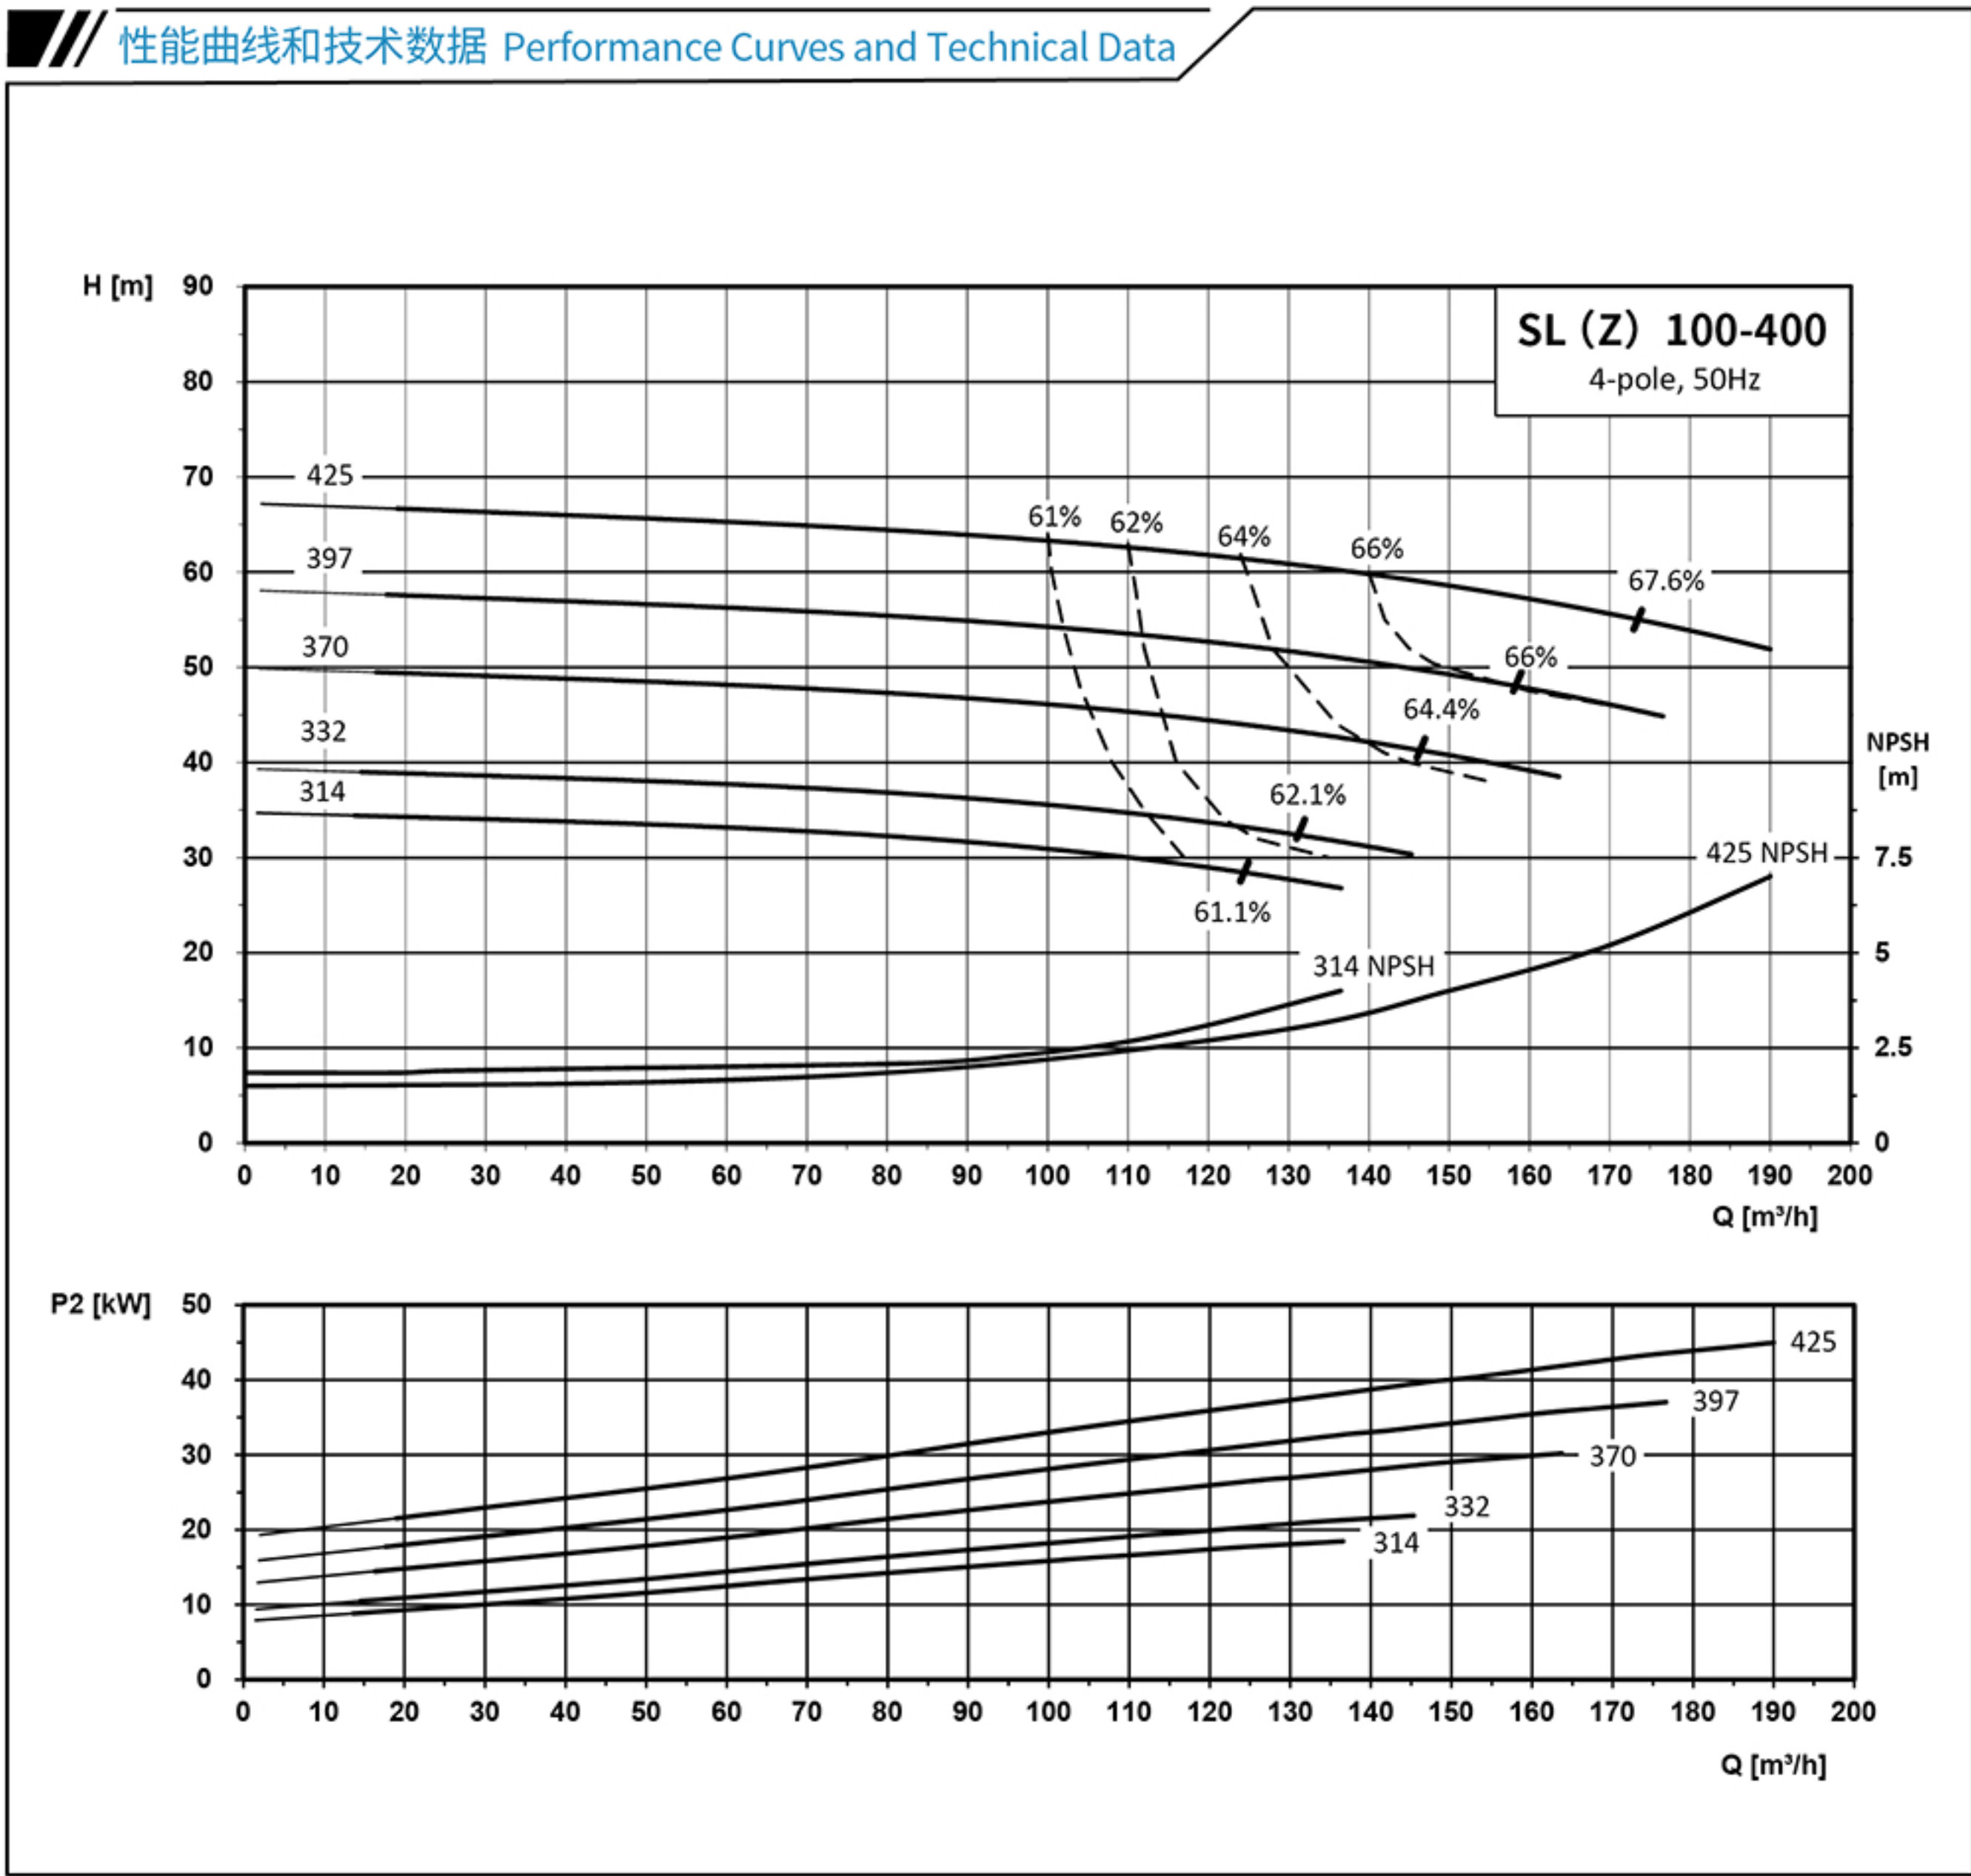


泵型号	Pump Model	SL(Z)100-400-18.5-4	SL(Z)100-400-22-4	SL(Z)100-400-30-4	SL(Z)100-400-37-4	SL(Z)100-400-45-4
电机型号	Motor Model	YE3-180M-4	YE3-180L-4	YE3-200L-4	YE3-225S-4	YE3-225M-4
电机功率(kW)	Motor Power(kW)	18.5	22	30	37	45
叶轮直径(mm)	Impeller Diameter(mm)	314	332	370	397	425

SL(Z) 125-400

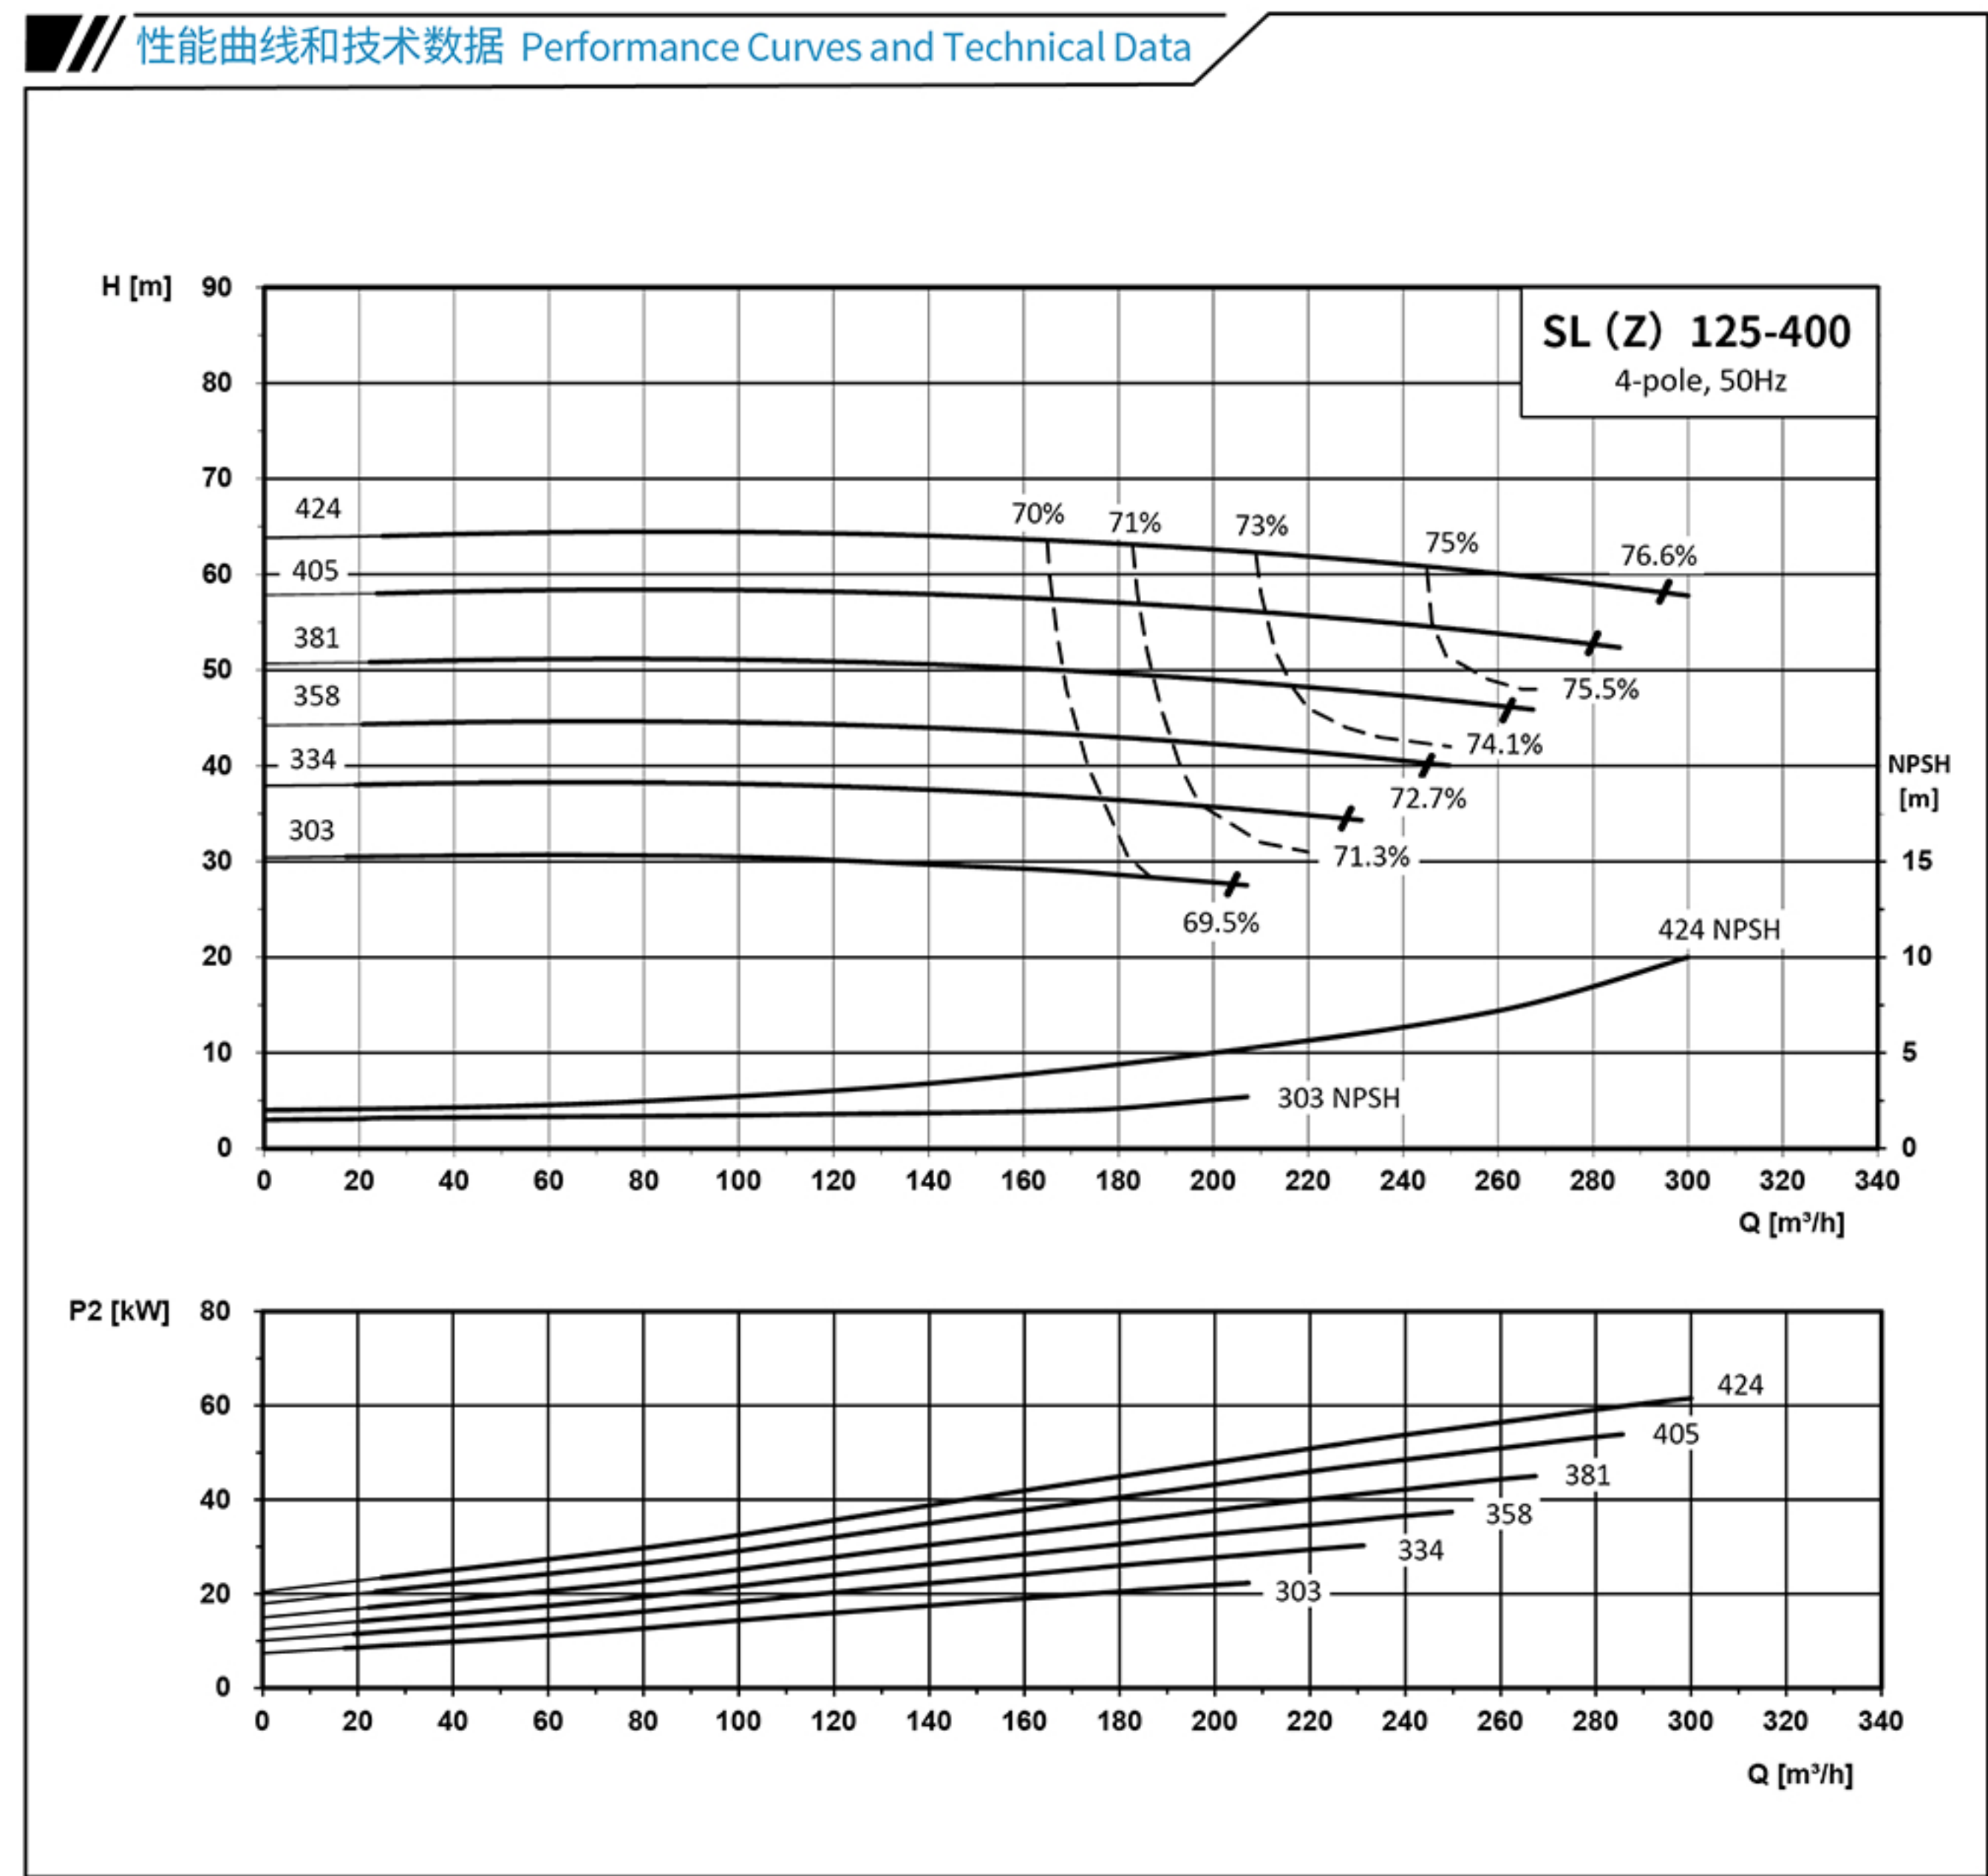

泵型号	Pump Model	SL(Z) 125-400-22-4	SL(Z) 125-400-30-4	SL(Z) 125-400-37-4	SL(Z) 125-400-45-4	SL(Z) 125-400-55-4	SL(Z) 125-400-75-4
电机型号	Motor Model	YE3-180L-4	YE3-200L-4	YE3-225S-4	YE3-225M-4	YE3-250M-4	YE3-280S-4
电机功率(kW)	Motor Power(kW)	22	30	37	45	55	75
叶轮直径(mm)	Impeller Diameter(mm)	303	334	358	381	405	424


SL(Z) 150-400

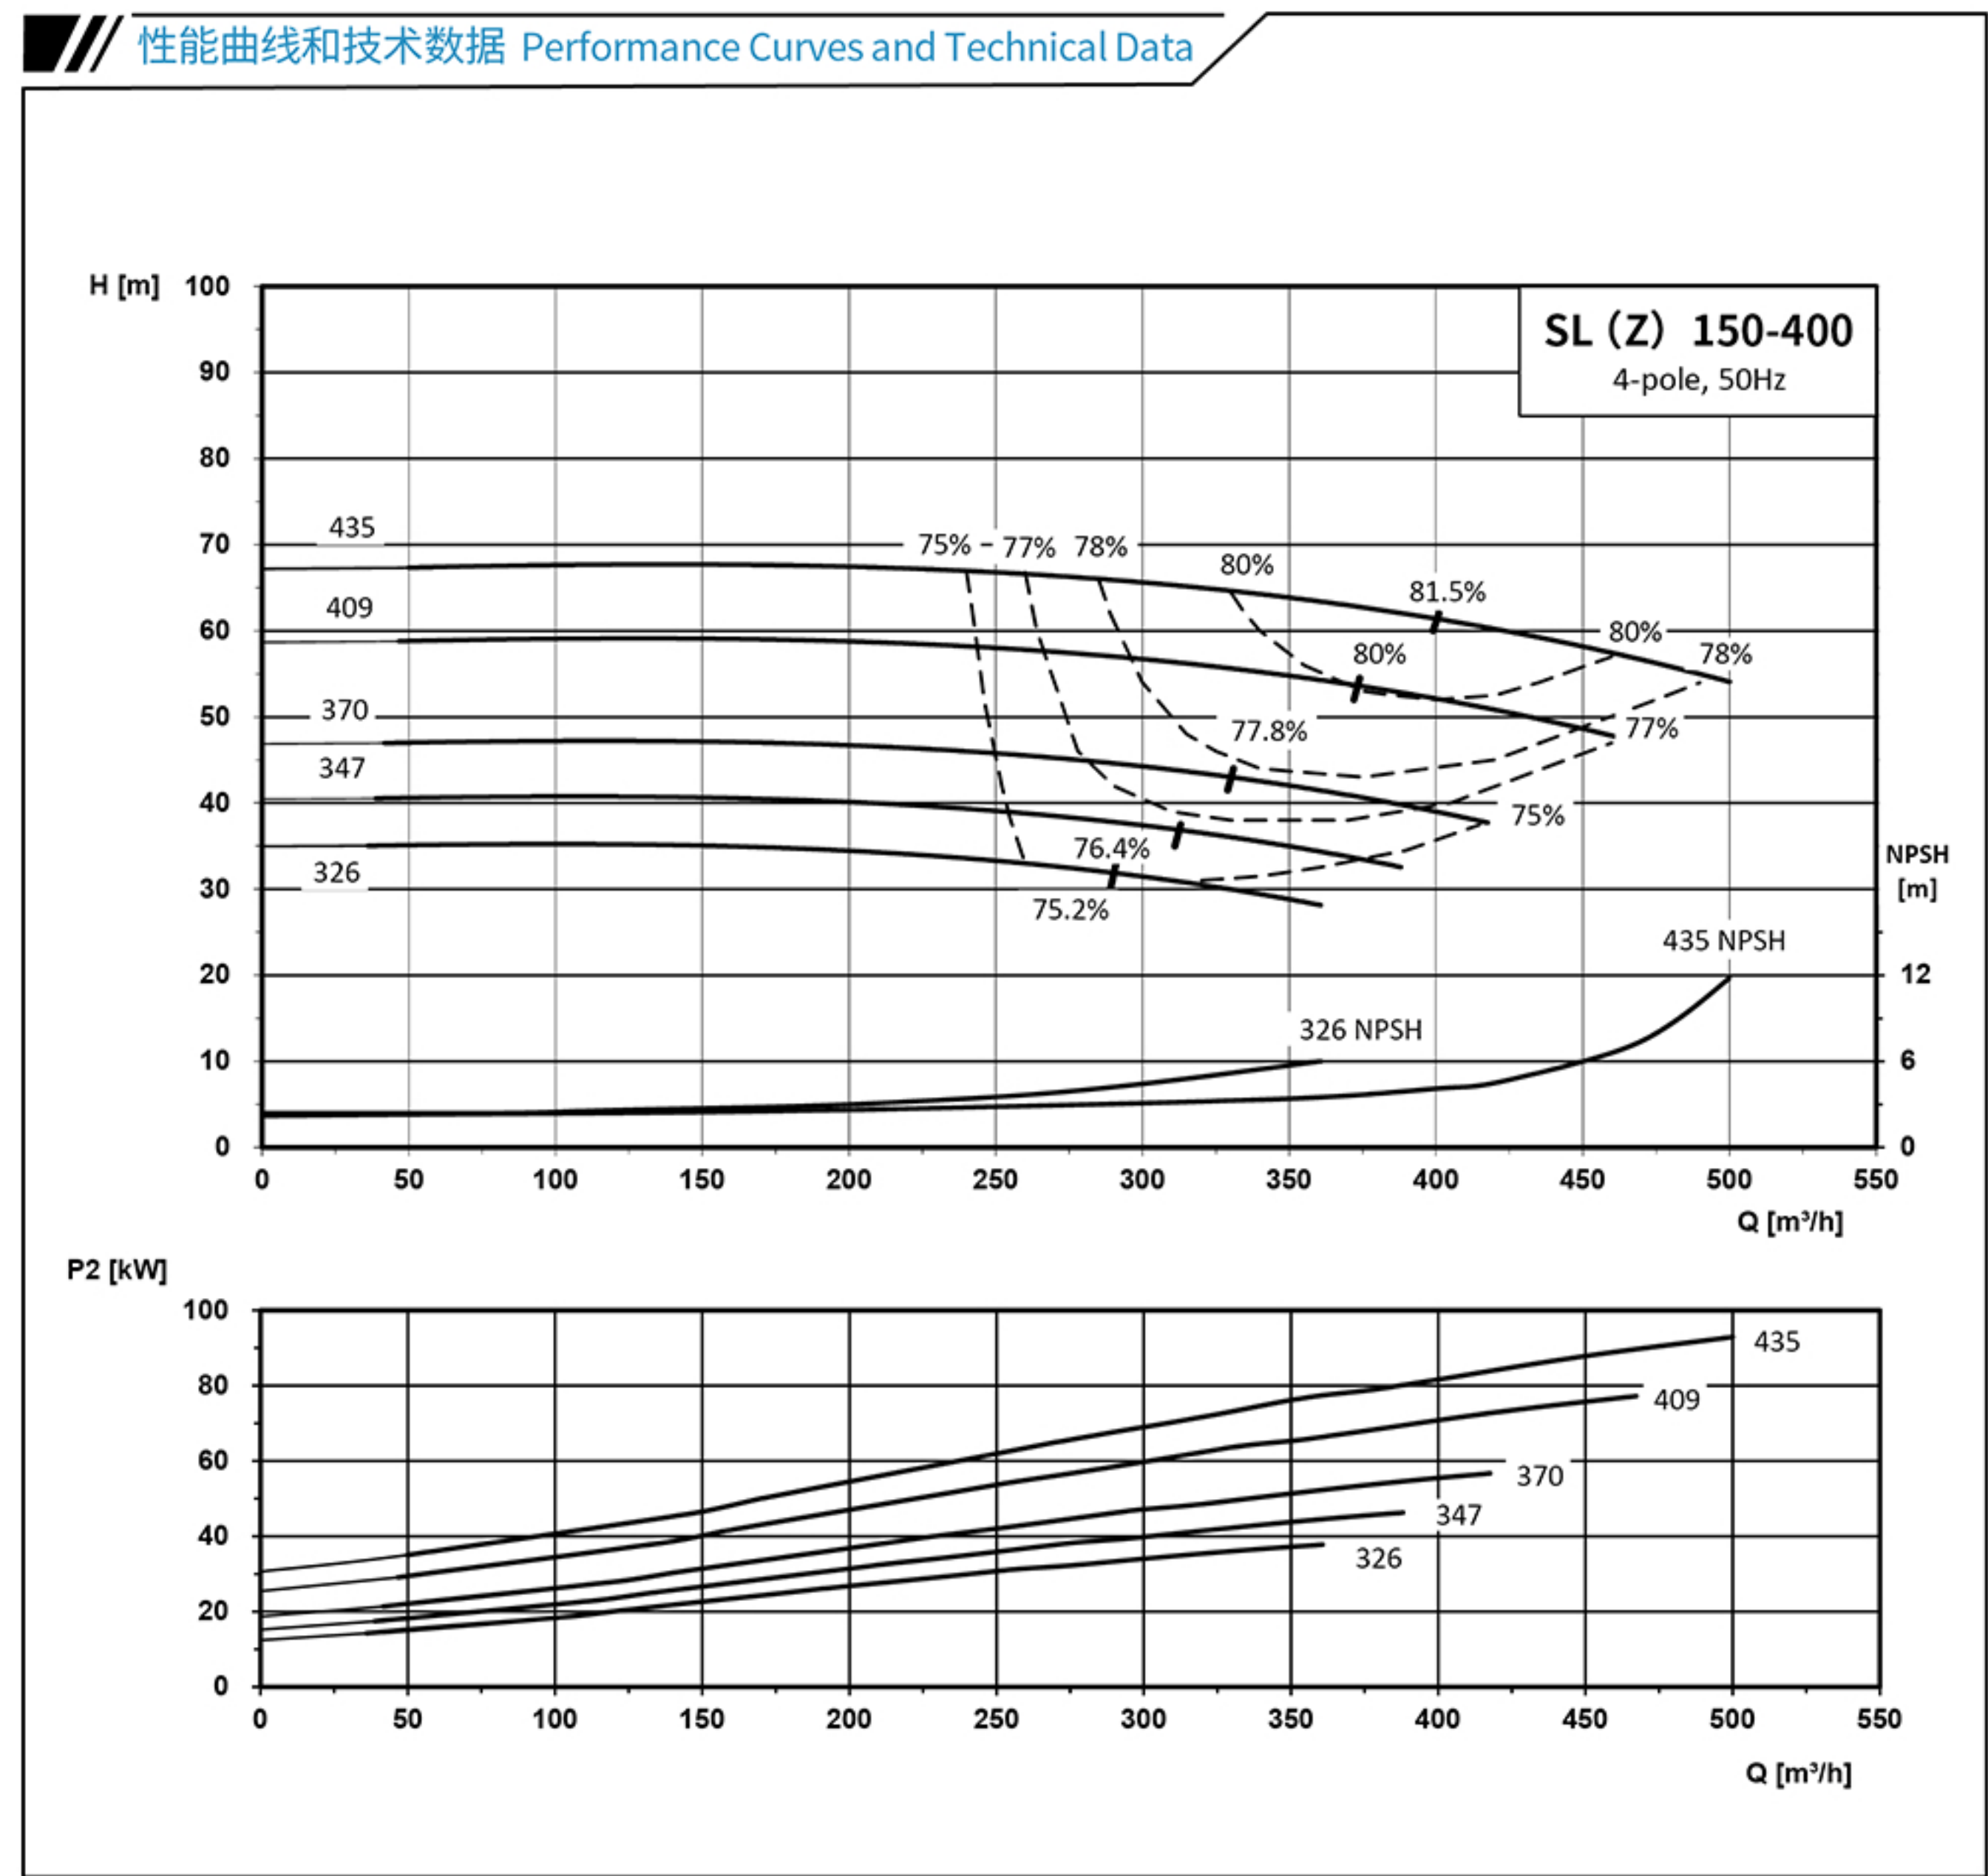

泵型号	Pump Model	SL(Z)150-400-37-4	SL(Z)150-400-45-4	SL(Z)150-400-55-4	SL(Z)150-400-75-4	SL(Z)150-400-90-4
电机型号	Motor Model	YE3-225S-4	YE3-225M-4	YE3-250M-4	YE3-280S-4	YE3-280M-4
电机功率(kW)	Motor Power(kW)	37	45	55	75	90
叶轮直径(mm)	Impeller Diameter(mm)	326	347	370	409	435


SL(Z) 200-400

性能曲线和技术数据 Performance Curves and Technical Data

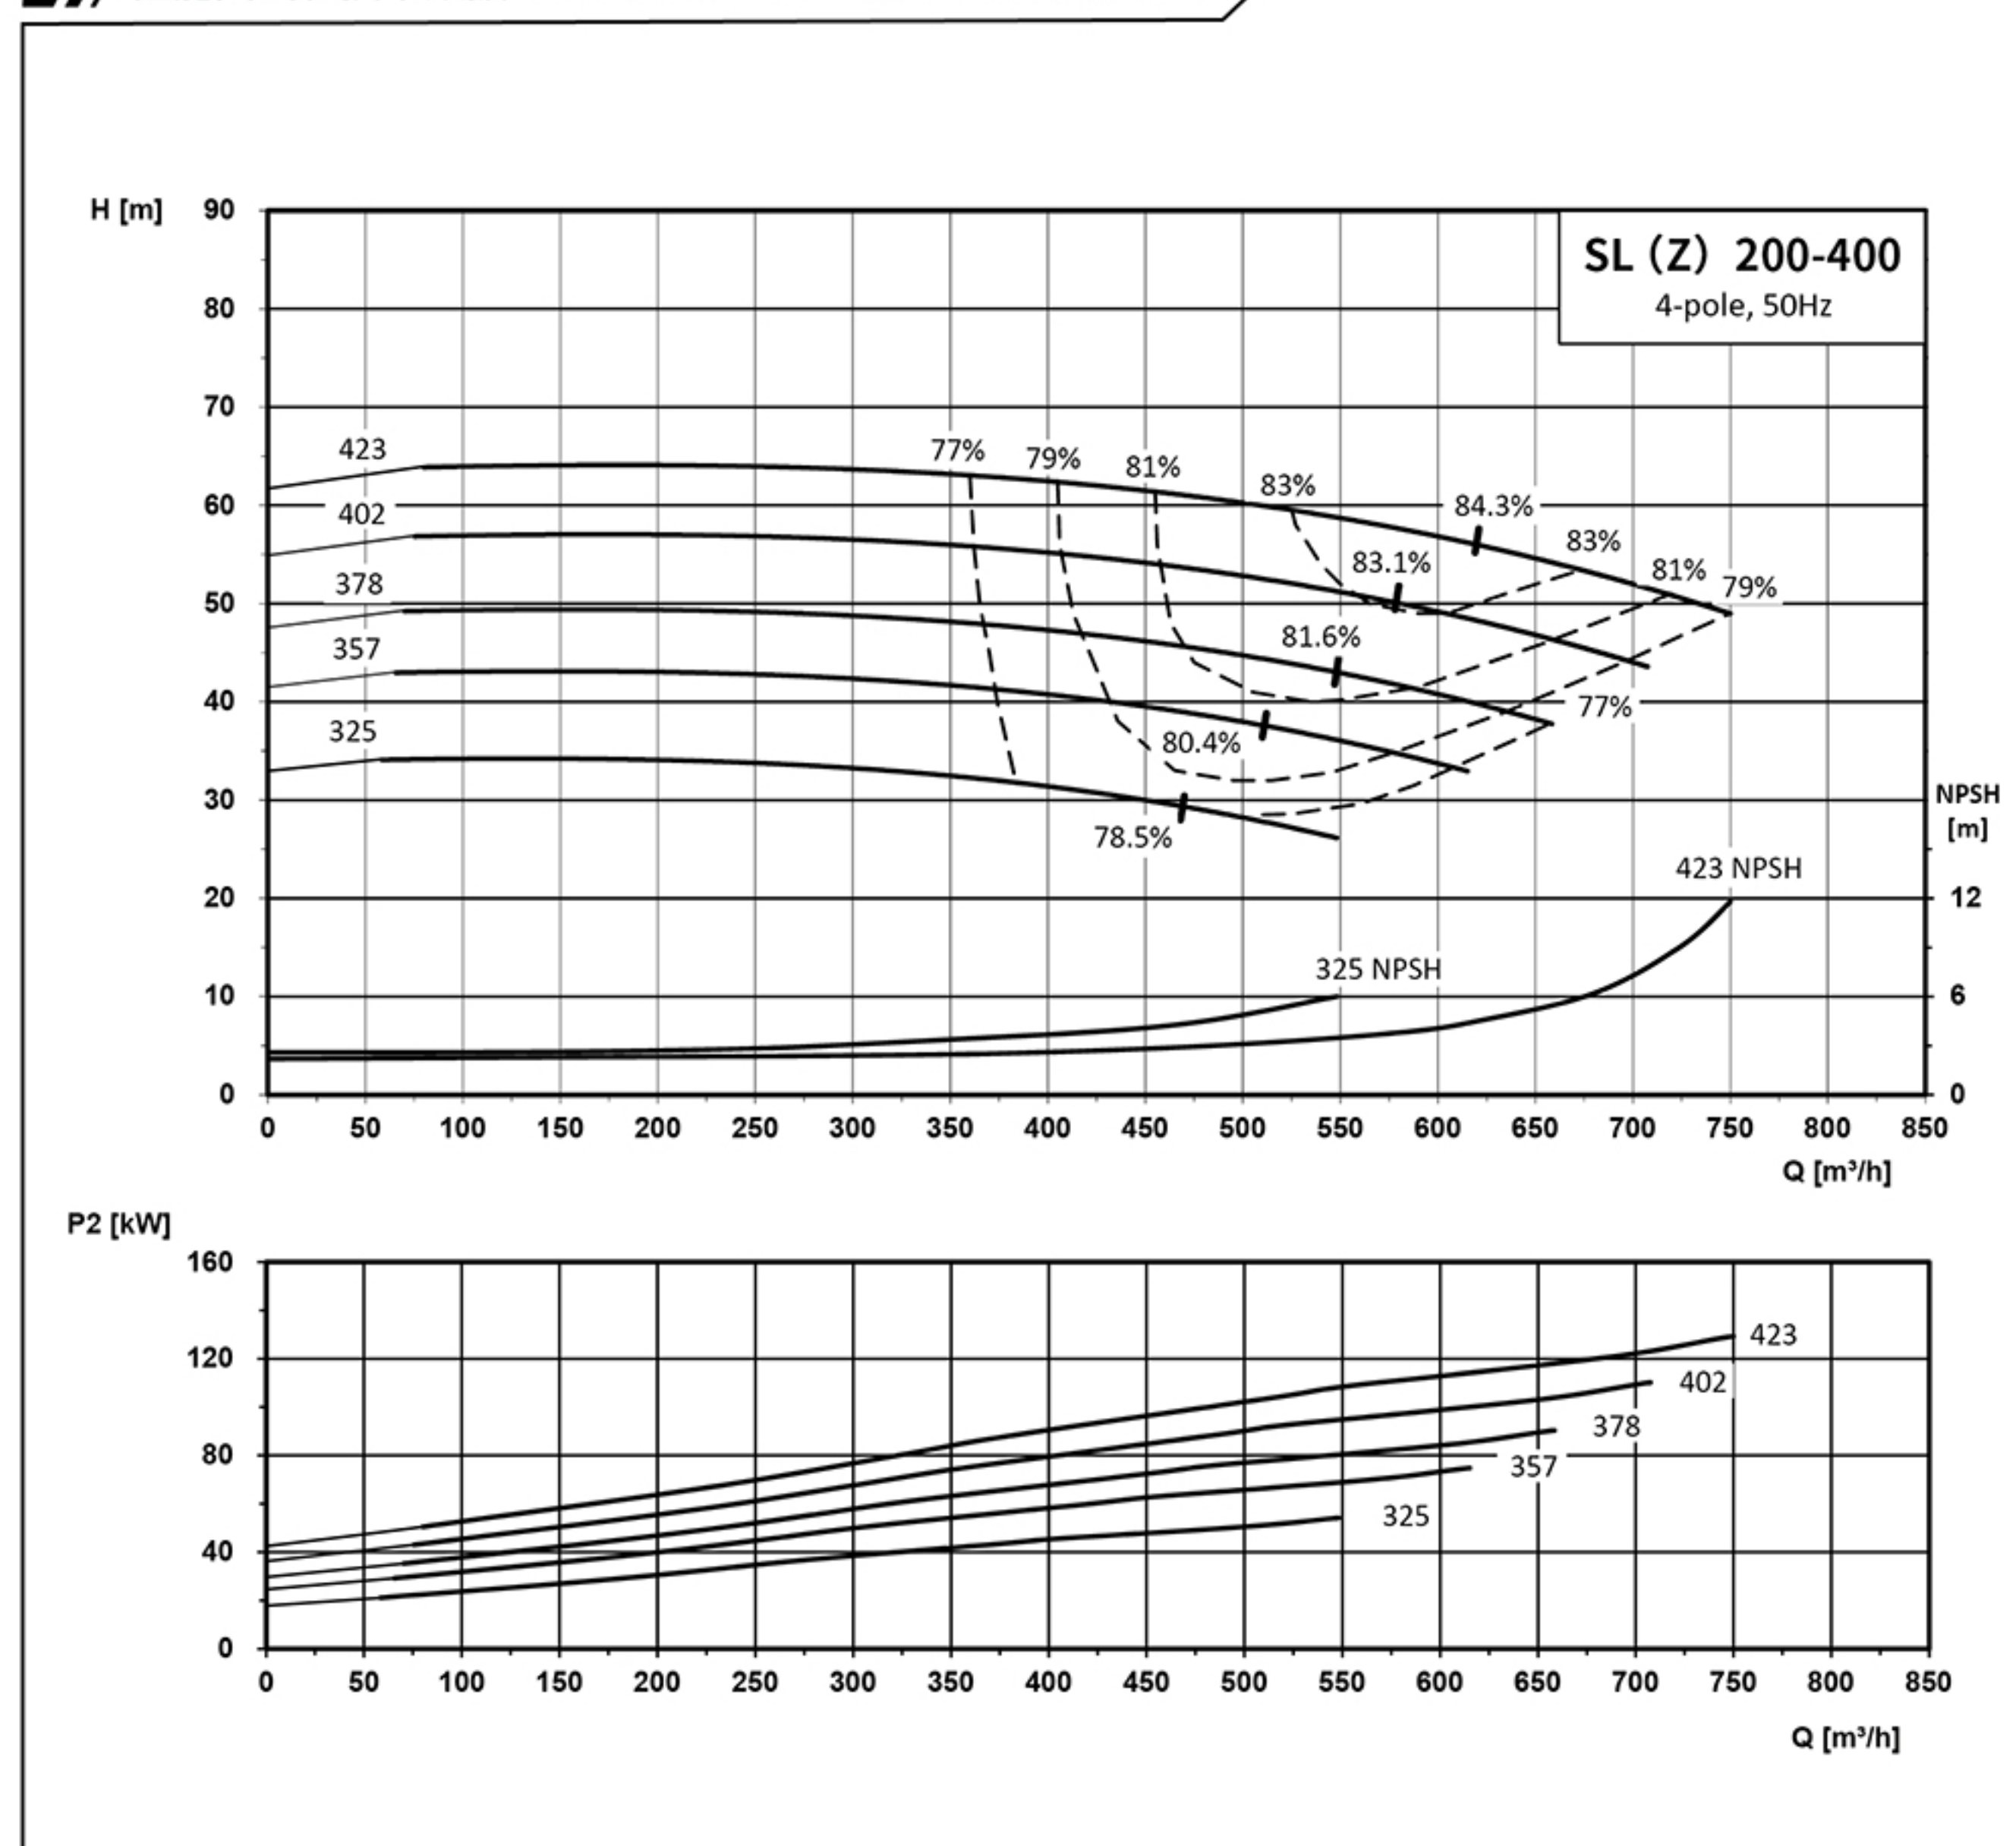

泵型号	Pump Model	SL(Z)200-400-55-4	SL(Z)200-400-75-4	SL(Z)200-400-90-4	SL(Z)200-400-110-4	SL(Z)200-400-132-4
电机型号	Motor Model	YE3-250M-4	YE3-280S-4	YE3-280M-4	YE3-315S-4	YE3-315M-4
电机功率(kW)	Motor Power(kW)	55	75	90	110	132
叶轮直径(mm)	Impeller Diameter(mm)	325	357	378	402	423

附录：SL 系列安装尺寸图（2级） Appendix: SL Series Installation Dimension Drawing (Level 2)

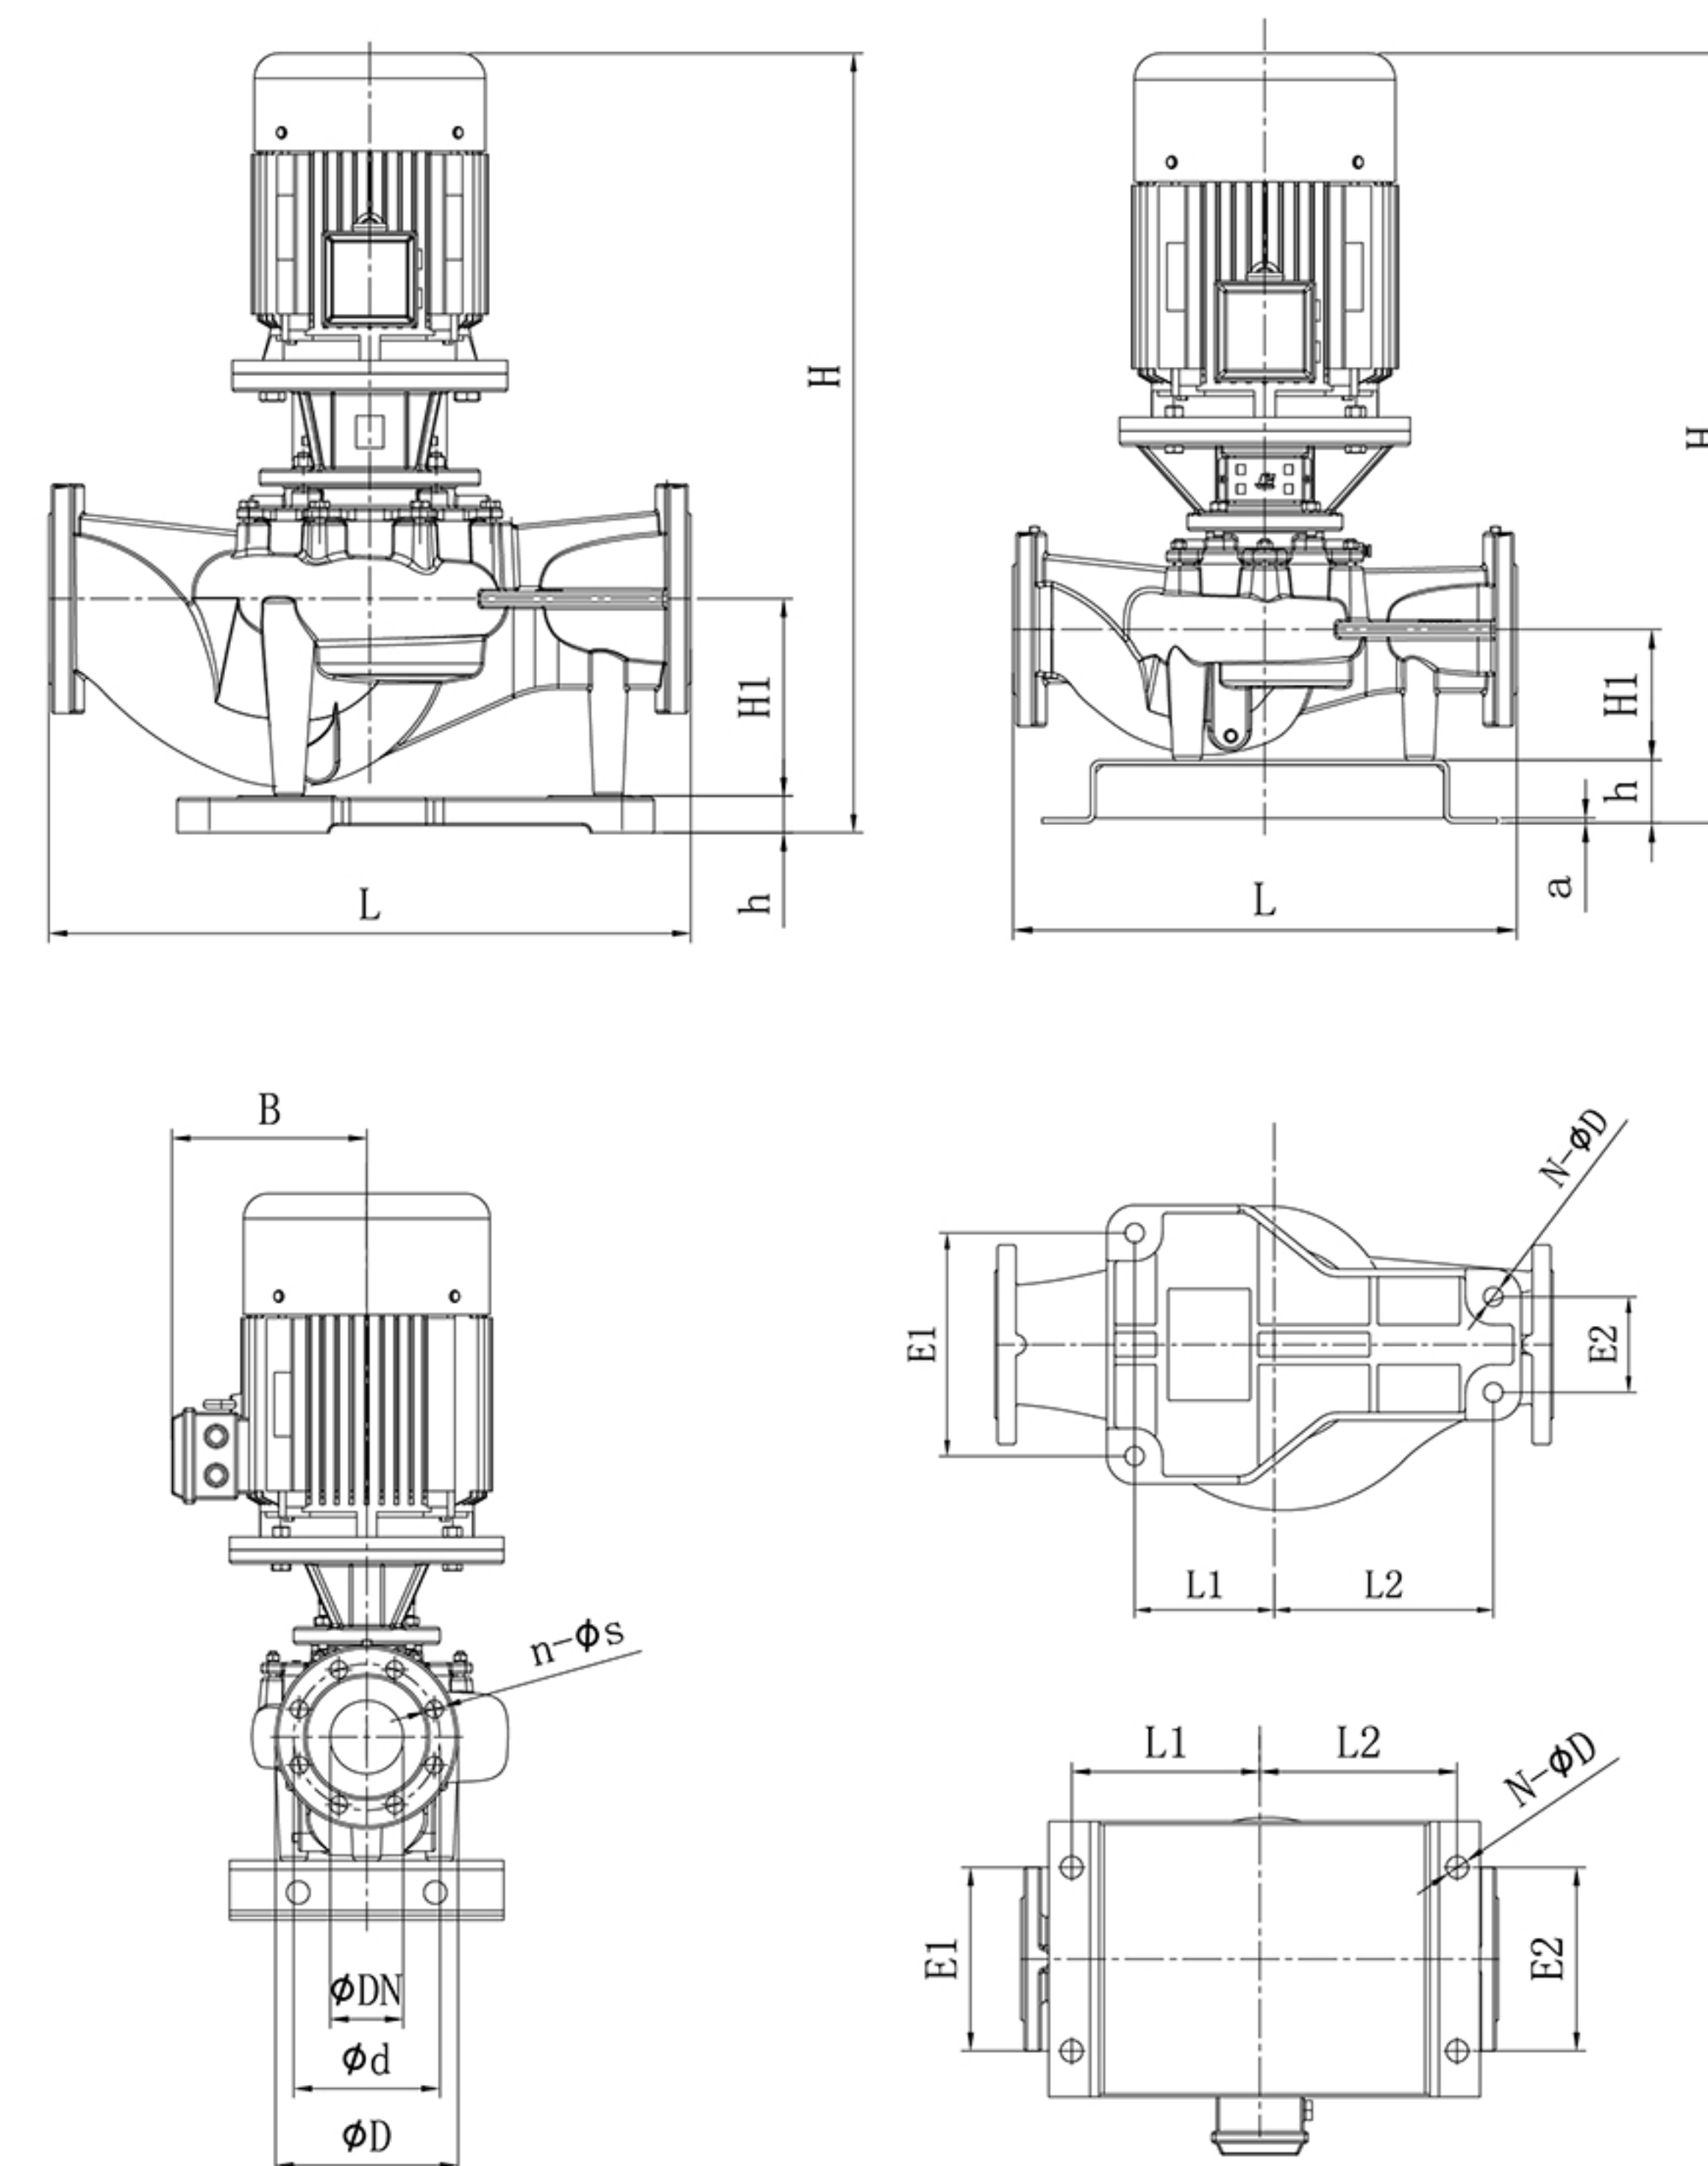

规格型号 Specifications & Models	H	h	a	H1	B	P	L	L1
32-125-2.2-2	665.5	65	6	100	150	200	360	210
32-125-1.5-2	635.5	65	6	100	150	200	360	210
32-125-1.1-2	595.5	65	6	100	140	200	360	210
32-125-0.75-2	595.5	65	6	100	140	200	360	210
40-125-4-2	745.5	65	6	110	190	250	400	210
40-125-3-2	725.5	65	6	110	170	250	400	210
40-125-2.2-2	675.5	65	6	110	150	200	400	210
40-125-1.5-2	645.5	65	6	110	150	200	400	210
40-125-1.1-2	605.5	65	6	110	140	200	400	210
50-125-5.5-2	797.5	65	6	120	210	300	400	210
50-125-4-2	767.5	65	6	120	190	250	400	210
50-125-3-2	747.5	65	6	120	170	250	400	210
50-125-2.2-2	697.5	65	6	120	150	200	400	210
50-125-1.5-2	667.5	65	6	120	150	200	400	210
65-125-7.5-2	789	65	6	120	210	300	440	210
65-125-5.5-2	789	65	6	120	210	300	440	210
65-125-4-2	769	65	6	120	190	250	440	210
65-125-3-2	739	65	6	120	170	250	440	210
80-125-9.2-2	805	65	6	135	210	350	520	205
80-125-7.5-2	805	65	6	135	210	300	520	205
80-125-5.5-2	805	65	6	135	210	300	520	205
80-125-4-2	715	65	6	135	190	250	520	205
32-160-1.5-2	630	65	6	100	150	200	400	210
32-160-2.2-2	670	65	6	100	150	200	400	210
32-160-3-2	710	65	6	100	170	250	400	210
32-160-4-2	750	65	6	100	190	250	400	210
40-160-2.2-2	681	65	6	110	150	200	400	210
40-160-3-2	721	65	6	110	170	250	400	210
40-160-4-2	761	65	6	110	190	250	400	210
40-160-5.5-2	771	65	6	110	210	300	400	210
40-160-7.5-2	771	65	6	110	210	300	400	210
50-160-9.2-2	774	65	6	120	210	350	440	210
50-160-7.5-2	774	65	6	120	210	300	440	210
50-160-5.5-2	774	65	6	120	210	300	440	210
50-160-4-2	684	65	6	120	190	250	440	210

L2	E1	E2	N-ØD	ØD	Ød	ØDN	n-Øs	重量 Weight
210	200	200	4-Ø18	140	100	32	4-Ø19	59
210	200	200	4-Ø18	140	100	32	4-Ø19	57
210	200	200	4-Ø18	140	100	32	4-Ø19	53
210	200	200	4-Ø18	140	100	32	4-Ø19	51
210	200	200	4-Ø18	150	110	40	4-Ø19	78
210	200	200	4-Ø18	150	110	40	4-Ø19	69
210	200	200	4-Ø18	150	110	40	4-Ø19	60
210	200	200	4-Ø18	150	110	40	4-Ø19	58
210	200	200	4-Ø18	150	110	40	4-Ø19	55
210	200	200	4-Ø18	165	125	50	4-Ø19	111
210	200	200	4-Ø18	165	125	50	4-Ø19	86
210	200	200	4-Ø18	165	125	50	4-Ø19	77
210	200	200	4-Ø18	165	125	50	4-Ø19	68
210	200	200	4-Ø18	165	125	50	4-Ø19	66
210	200	200	4-Ø18	185	145	65	4-Ø19	121
210	200	200	4-Ø18	185	145	65	4-Ø19	114
210	200	200	4-Ø18	185	145	65	4-Ø19	90
210	200	200	4-Ø18	185	145	65	4-Ø19	81
215	200	200	4-Ø18	200	160	80	8-Ø19	136
215	200	200	4-Ø18	200	160	80	8-Ø19	124
215	200	200	4-Ø18	200	160	80	8-Ø19	117
215	200	200	4-Ø18	200	160	80	8-Ø19	93
210	200	200	4-Ø18	140	100	32	4-Ø19	72
210	200	200	4-Ø18	140	100	32	4-Ø19	63
210	200	200	4-Ø18	140	100	32	4-Ø19	54
210	200	200	4-Ø18	140	100	32	4-Ø19	52
210	200	200	4-Ø18	150	110	40	4-Ø19	54
210	200	200	4-Ø18	150	110	40	4-Ø19	63
210	200	200	4-Ø18	150	110	40	4-Ø19	72
210	200	200	4-Ø18	150	110	40	4-Ø19	97
210	200	200	4-Ø18	150	110	40	4-Ø19	104
210	200	200	4-Ø18	165	125	50	4-Ø19	131
210	200	200	4-Ø18	165	125	50	4-Ø19	119
210	200	200	4-Ø18	165	125	50	4-Ø19	112
210	200	200	4-Ø18	165	125	50	4-Ø19	88

规格型号 Specifications & Models	H	h	a	H1	B	P	L	L1
65-160-15-2	926.5	65	6	480	260	350	480	205
65-160-11-2	926.5	65	6	480	260	350	480	205
65-160-9.2-2	780	65	6	480	210	350	480	205
65-160-7.5-2	780	65	6	480	210	300	480	205
65-160-5.5-2	780	65	6	480	210	300	480	205
80-160-18.5-2	1031.5	65	6	180	260	350	520	205
80-160-15-2	986.5	65	6	180	260	350	520	205
80-160-11-2	986.5	65	6	180	260	350	520	205
80-160-9.2-2	840	65	6	180	210	350	520	205
80-160-7.5-2	840	65	6	180	210	300	520	205
100-160-30-2	1159.5	65	6	180	305	400	600	250
100-160-22-2	1139.5	65	6	180	280	350	600	250
100-160-18.5-2	1054.5	65	6	180	260	350	600	250
100-160-15-2	1009.5	65	6	180	260	350	600	250
100-160-11-2	1009.5	65	6	180	260	350	600	250
125-160-37-2	1208.5	65	6	220	305	400	650	250
125-160-30-2	1208.5	65	6	220	305	400	650	250
125-160-22-2	1188.5	65	6	220	280	350	650	250
32-200-7.5-2	754	65	6	100	210	300	400	210
32-200-5.5-2	754	65	6	100	210	300	400	210
32-200-4-2	744	65	6	100	190	250	400	210
32-200-3-2	704	65	6	100	170	250	400	210
40-200-11-2	925.5	65	6	110	260	350	400	210
40-200-9.2-2	764	65	6	110	210	350	400	210
40-200-7.5-2	764	65	6	110	210	300	400	210
40-200-5.5-2	764	65	6	110	210	300	400	210
40-200-4-2	674	65	6	110	190	250	400	210
50-200-15-2	955.5	65	6	135	260	350	440	205
50-200-11-2	955.5	65	6	135	260	350	440	205
50-200-9.2-2	794	65	6	135	210	350	440	205
50-200-7.5-2	794	65	6	135	210	300	440	205
50-200-5.5-2	794	65	6	135	210	300	440	205
65-200-22-2	1080	65	6	135	280	350	480	205
65-200-18.5-2	995	65	6	135	260	350	480	205
65-200-15-2	950	65	6	135	260	350	480	205

L2	E1	E2	N-ØD	ØD	Ød	ØDN	n-Øs	重量 Weight
215	200	200	4-Ø18	185	145	65	4-Ø19	211
215	200	200	4-Ø18	185	145	65	4-Ø19	203
215	200	200	4-Ø18	185	145	65	4-Ø19	136
215	200	200	4-Ø18	185	145	65	4-Ø19	124
215	200	200	4-Ø18	185	145	65	4-Ø19	117
215	200	200	4-Ø18	200	160	80	8-Ø19	239
215	200	200	4-Ø18	200	160	80	8-Ø19	222
215	200	200	4-Ø18	200	160	80	8-Ø19	214
215	200	200	4-Ø18	200	160	80	8-Ø19	147
215	200	200	4-Ø18	200	160	80	8-Ø19	135
250	200	200	4-Ø18	220	180	100	8-Ø19	348
250	200	200	4-Ø18	220	180	100	8-Ø19	282
250	200	200	4-Ø18	220	180	100	8-Ø19	245
250	200	200	4-Ø18	220	180	100	8-Ø19	228
250	200	200	4-Ø18	220	180	100	8-Ø19	220
250	200	200	4-Ø18	250	210	125	8-Ø19	40
250	200	200	4-Ø18	250	210	125	8-Ø19	374
250	200	200	4-Ø18	250	210	125	8-Ø19	309
210	200	200	4-Ø18	140	100	32	4-Ø19	105
210	200	200	4-Ø18	140	100	32	4-Ø19	100
210	200	200	4-Ø18	140	100	32	4-Ø19	84
210	200	200	4-Ø18	140	100	32	4-Ø19	77
210	200	200	4-Ø18	150	110	40	4-Ø19	151
210	200	200	4-Ø18	150	110	40	4-Ø19	132
210	200	200	4-Ø18	150	110	40	4-Ø19	108
210	200	200	4-Ø18	150	110	40	4-Ø19	103
210	200	200	4-Ø18	150	110	40	4-Ø19	86
215	200	200	4-Ø18	165	125	50	4-Ø19	164
215	200	200	4-Ø18	165	125	50	4-Ø19	156
215	200	200	4-Ø18	165	125	50	4-Ø19	113
215	200	200	4-Ø18	165	125	50	4-Ø19	113
215	200	200	4-Ø18	165	125	50	4-Ø19	108
215	200	200	4-Ø18	185	145	65	4-Ø19	251
215	200	200	4-Ø18	185	145	65	4-Ø19	187
215	200	200	4-Ø18	185	145	65	4-Ø19	173

规格型号 Specifications & Models	H	h	a	H1	B	P	L	L1
65-200-11-2	950	65	6	135	260	350	480	205
80-200-37-2	1117	65	6	145	305	400	520	250
80-200-30-2	1117	65	6	145	305	400	520	250
80-200-22-2	1097	65	6	145	280	350	520	250
80-200-18.5-2	1012	65	6	145	260	350	520	250
80-200-15-2	967	65	6	145	260	350	520	250
80-200-11-2	967	65	6	145	260	350	520	250
100-200-55-2	1316	65	6	180	370	550	600	235
100-200-45-2	1216	65	6	180	335	450	600	235
100-200-37-2	1166	65	6	180	305	400	600	235
100-200-30-2	1166	65	6	180	305	400	600	235
100-200-22-2	1146	65	6	180	280	350	600	235
125-200-75-2	1402	40	\	215	410	550	700	173
125-200-55-2	1342	40	\	215	370	550	700	173
125-200-45-2	1242	40	\	215	335	450	700	173
125-200-37-2	1192	40	\	215	305	400	700	173
125-200-30-2	1192	40	\	215	305	400	700	173
150-200-110-2	1636	40	\	230	535	660	800	175
150-200-90-2	1466	40	\	230	410	550	800	175
150-200-75-2	1416	40	\	230	410	550	800	175
150-200-55-2	1356	40	\	230	370	55	800	175
150-200-45-2	1256	40	\	230	335	450	800	175
200-200-132-2	1814.5	40	\	280	535	660	1000	185
200-200-110-2	1704.5	40	\	280	535	660	1000	185
200-200-90-2	1534.5	40	\	280	410	550	1000	185
200-200-75-2	1484.5	40	\	280	410	550	1000	185
200-250-110-2	1715	40	\	300	535	660	1000	185
200-250-132-2	1825	40	\	300	535	660	1000	185
200-250-160-2	1825	40	\	300	535	660	1000	185
200-250-185-2	1825	40	\	300	535	660	1000	185
200-250-200-2	1825	40	\	300	535	660	1000	185
32-250-11-2	925.5	65	6	110	260	350	440	205
32-250-9.2-2	764	65	6	110	210	350	440	205
32-250-7.5-2	764	65	6	110	210	300	440	205
32-250-5.5-2	764	65	6	110	210	300	440	205

L2	E1	E2	N-ØD	ØD	Ød	ØDN	n-Øs	重量 Weight
215	200	200	4-Ø18	185	145	65	4-Ø19	165
250	200	200	4-Ø18	200	160	80	8-Ø19	359
250	200	200	4-Ø18	200	160	80	8-Ø19	341
250	200	200	4-Ø18	200	160	80	8-Ø19	254
250	200	200	4-Ø18	200	160	80	8-Ø19	190
250	200	200	4-Ø18	200	160	80	8-Ø19	176
250	200	200	4-Ø18	200	160	80	8-Ø19	168
265	200	200	4-Ø18	220	180	100	8-Ø19	540
265	200	200	4-Ø18	220	180	100	8-Ø19	435
265	200	200	4-Ø18	220	180	100	8-Ø19	378
265	200	200	4-Ø18	220	180	100	8-Ø19	360
265	200	200	4-Ø18	220	180	100	8-Ø19	273
277	280	120	4-Ø24	250	210	125	8-Ø19	696
277	280	120	4-Ø24	250	210	125	8-Ø19	583
277	280	120	4-Ø24	250	210	125	8-Ø19	478
277	280	120	4-Ø24	250	210	125	8-Ø19	421
277	280	120	4-Ø24	250	210	125	8-Ø19	403
275	280	120	4-Ø24	285	240	150	8-Ø23	1140
275	280	120	4-Ø24	285	240	150	8-Ø23	866
275	280	120	4-Ø24	285	240	150	8-Ø23	731
275	280	120	4-Ø24	285	240	150	8-Ø23	618
275	280	120	4-Ø24	285	240	150	8-Ø23	513
365	330	120	4-Ø24	340	295	200	12-Ø23	1327
365	330	120	4-Ø24	340	295	200	12-Ø23	1227
365	330	120	4-Ø24	340	295	200	12-Ø23	933
365	330	120	4-Ø24	340	295	200	12-Ø23	795
365	330	120	4-Ø24	340	295	200	12-Ø23	1282
365	330	120	4-Ø24	340	295	200	12-Ø23	1382
365	330	120	4-Ø24	340	295	200	12-Ø23	1486
365	330	120	4-Ø24	340	295	200	12-Ø23	1497
365	330	120	4-Ø24	340	295	200	12-Ø23	1567
215	200	200	4-Ø18	140	100	32	4-Ø19	193
215	200	200	4-Ø18	140	100	32	4-Ø19	126
215	200	200	4-Ø18	140	100	32	4-Ø19	114
215	200	200	4-Ø18	140	100	32	4-Ø19	107


规格型号 Specifications & Models	H	h	a	H1	B	P	L	L1
40-250-15-2	925.5	65	6	110	260	350	440	205
40-250-11-2	925.5	65	6	110	260	350	440	205
40-250-9.2-2	764	65	6	110	210	350	440	205
40-250-7.5-2	764	65	6	110	210	300	440	205
40-250-5.5-2	764	65	6	110	210	300	440	205
50-250-30-2	1089.5	65	6	120	305	400	480	205
50-250-22-2	1069.5	65	6	120	280	350	480	205
50-250-18.5-2	984.5	65	6	120	260	350	480	205
50-250-15-2	939.5	65	6	120	260	350	480	205
50-250-11-2	939.5	65	6	120	260	350	480	205
65-250-37-2	1103	65	6	135	305	400	520	250
65-250-30-2	1103	65	6	135	305	400	520	250
65-250-22-2	1103	65	6	135	280	350	520	250
65-250-18.5-2	998	65	6	135	260	350	520	250
65-250-15-2	953	65	6	135	260	350	520	250
80-250-75-2	1368.5	40	\	185	410	550	600	225
80-250-55-2	1308.5	40	\	185	370	550	600	225
80-250-45-2	1208.5	40	\	185	335	450	600	225
80-250-37-2	1158.5	40	\	185	305	400	600	225
80-250-30-2	1158.5	40	\	185	305	400	600	225
100-250-90-2	1410	40	\	180	410	550	650	225
100-250-75-2	1360	40	\	180	410	550	650	225
100-250-55-2	1300	40	\	180	370	550	650	225
100-250-45-2	1200	40	\	180	335	450	650	225
125-250-132-2	1731	40	\	215	535	660	750	175
125-250-110-2	1621	40	\	215	535	660	750	175
125-250-90-2	1451	40	\	215	410	550	750	175
125-250-75-2	1401	40	\	215	410	550	750	175
125-250-55-2	1341	40	\	215	370	550	750	175
150-250-185-2	1746	40	\	230	535	660	800	175
150-250-160-2	1746	40	\	230	535	660	800	175
150-250-132-2	1746	40	\	230	535	660	800	175
150-250-110-2	1636	40	\	230	535	660	800	175
150-250-90-2	1466	40	\	230	410	550	800	175
50-315-55-2	1320.5	65	6	180	370	550	560	250

L2	E1	E2	N-ØD	ØD	Ød	ØDN	n-Øs	重量 Weight
215	200	200	4-Ø18	150	110	40	4-Ø19	202
215	200	200	4-Ø18	150	110	40	4-Ø19	194
215	200	200	4-Ø18	150	110	40	4-Ø19	126
215	200	200	4-Ø18	150	110	40	4-Ø19	114
215	200	200	4-Ø18	150	110	40	4-Ø19	107
215	200	200	4-Ø18	165	125	50	4-Ø19	328
215	200	200	4-Ø18	165	125	50	4-Ø19	264
215	200	200	4-Ø18	165	125	50	4-Ø19	227
215	200	200	4-Ø18	165	125	50	4-Ø19	210
215	200	200	4-Ø18	165	125	50	4-Ø19	202
250	200	200	4-Ø18	185	145	65	4-Ø19	370
250	200	200	4-Ø18	185	145	65	4-Ø19	334
250	200	200	4-Ø18	185	145	65	4-Ø19	270
250	200	200	4-Ø18	185	145	65	4-Ø19	233
250	200	200	4-Ø18	185	145	65	4-Ø19	216
225	280	120	4-Ø24	200	160	80	8-Ø19	694
225	280	120	4-Ø24	200	160	80	8-Ø19	563
225	280	120	4-Ø24	200	160	80	8-Ø19	469
225	280	120	4-Ø24	200	160	80	8-Ø19	402
225	280	120	4-Ø24	200	160	80	8-Ø19	366
225	280	120	4-Ø24	220	180	100	8-Ø19	794
225	280	120	4-Ø24	220	180	100	8-Ø19	710
225	280	120	4-Ø24	220	180	100	8-Ø19	579
225	280	120	4-Ø24	220	180	100	8-Ø19	485
275	280	120	4-Ø24	250	210	125	8-Ø19	1273
275	280	120	4-Ø24	250	210	125	8-Ø19	1173
275	280	120	4-Ø24	250	210	125	8-Ø19	803
275	280	120	4-Ø24	250	210	125	8-Ø19	721
275	280	120	4-Ø24	250	210	125	8-Ø19	589
275	280	120	4-Ø24	285	240	150	8-Ø23	1411
275	280	120	4-Ø24	285	240	150	8-Ø23	1400
275	280	120	4-Ø24	285	240	150	8-Ø23	1296
275	280	120	4-Ø24	285	240	150	8-Ø23	1196
275	280	120	4-Ø24	285	240	150	8-Ø23	825
250	200	200	4-Ø18	165	125	50	4-Ø19	561

规格型号 Specifications & Models	H	h	a	H1	B	P	L	L1
50-315-45-2	1220.5	65	6	180	335	450	560	250
50-315-37-2	1170.5	65	6	180	305	400	560	250
50-315-30-2	1170.5	65	6	180	305	400	560	250
50-315-22-2	1150.5	65	6	180	280	350	560	250
65-315-75-2	1380.5	40	\	205	410	550	600	225
65-315-55-2	1320.5	40	\	205	370	550	600	225
65-315-45-2	1220.5	40	\	205	335	450	600	225
65-315-37-2	1170.5	40	\	205	305	400	600	225
65-315-30-2	1170.5	40	\	205	305	400	600	225
80-315-110-2	1598	40	\	205	535	660	650	225
80-315-90-2	1428	40	\	205	410	550	650	225
80-315-75-2	1428	40	\	205	410	550	650	225
80-315-55-2	1318	40	\	205	370	550	650	225
100-315-160-2	1708	40	\	205	535	660	750	175
100-315-132-2	1708	40	\	205	535	660	750	175
100-315-110-2	1598	40	\	205	535	660	750	175
100-315-90-2	1428	40	\	205	410	550	750	175
125-315-200-2	1708	40	\	205	535	660	850	175
125-315-160-2	1708	40	\	205	535	660	850	175
125-315-132-2	1708	40	\	205	535	660	850	175
125-315-110-2	1598	40	\	205	535	660	850	175
125-315-185-2	1708	40	\	205	535	660	850	175
150-315-200-2	1747	40	\	230	535	660	850	275
150-315-185-2	1747	40	\	230	535	660	850	275
150-315-160-2	1747	40	\	230	535	660	850	275
150-315-132-2	1747	40	\	230	535	660	850	275

L2	E1	E2	N-ØD	ØD	Ød	ØDN	n-Øs	重量 Weight
250	200	200	4-Ø18	165	125	50	4-Ø19	467
250	200	200	4-Ø18	165	125	50	4-Ø19	401
250	200	200	4-Ø18	165	125	50	4-Ø19	365
250	200	200	4-Ø18	165	125	50	4-Ø19	301
225	280	120	4-Ø24	185	145	65	4-Ø19	702
225	280	120	4-Ø24	185	145	65	4-Ø19	569
225	280	120	4-Ø24	185	145	65	4-Ø19	475
225	280	120	4-Ø24	185	145	65	4-Ø19	408
225	280	120	4-Ø24	185	145	65	4-Ø19	372
225	280	120	4-Ø24	200	160	80	8-Ø19	1128
225	280	120	4-Ø24	200	160	80	8-Ø19	829
225	280	120	4-Ø24	200	160	80	8-Ø19	694
225	280	120	4-Ø24	200	160	80	8-Ø19	580
275	280	120	4-Ø24	220	180	100	8-Ø19	1354
275	280	120	4-Ø24	220	180	100	8-Ø19	1259
275	280	120	4-Ø24	220	180	100	8-Ø19	1149
275	280	120	4-Ø24	220	180	100	8-Ø19	850
275	280	120	4-Ø24	250	210	125	8-Ø19	1506
275	280	120	4-Ø24	250	210	125	8-Ø19	1425
275	280	120	4-Ø24	250	210	125	8-Ø19	1321
275	280	120	4-Ø24	250	210	125	8-Ø19	1221
275	280	120	4-Ø24	250	210	125	8-Ø19	1436
275	330	120	4-Ø24	285	240	150	8-Ø23	1502
275	330	120	4-Ø24	285	240	150	8-Ø23	1417
275	330	120	4-Ø24	285	240	150	8-Ø23	1385
275	330	120	4-Ø24	285	240	150	8-Ø23	1315

● 附录：SL（Z）系列安装尺寸图（4级）

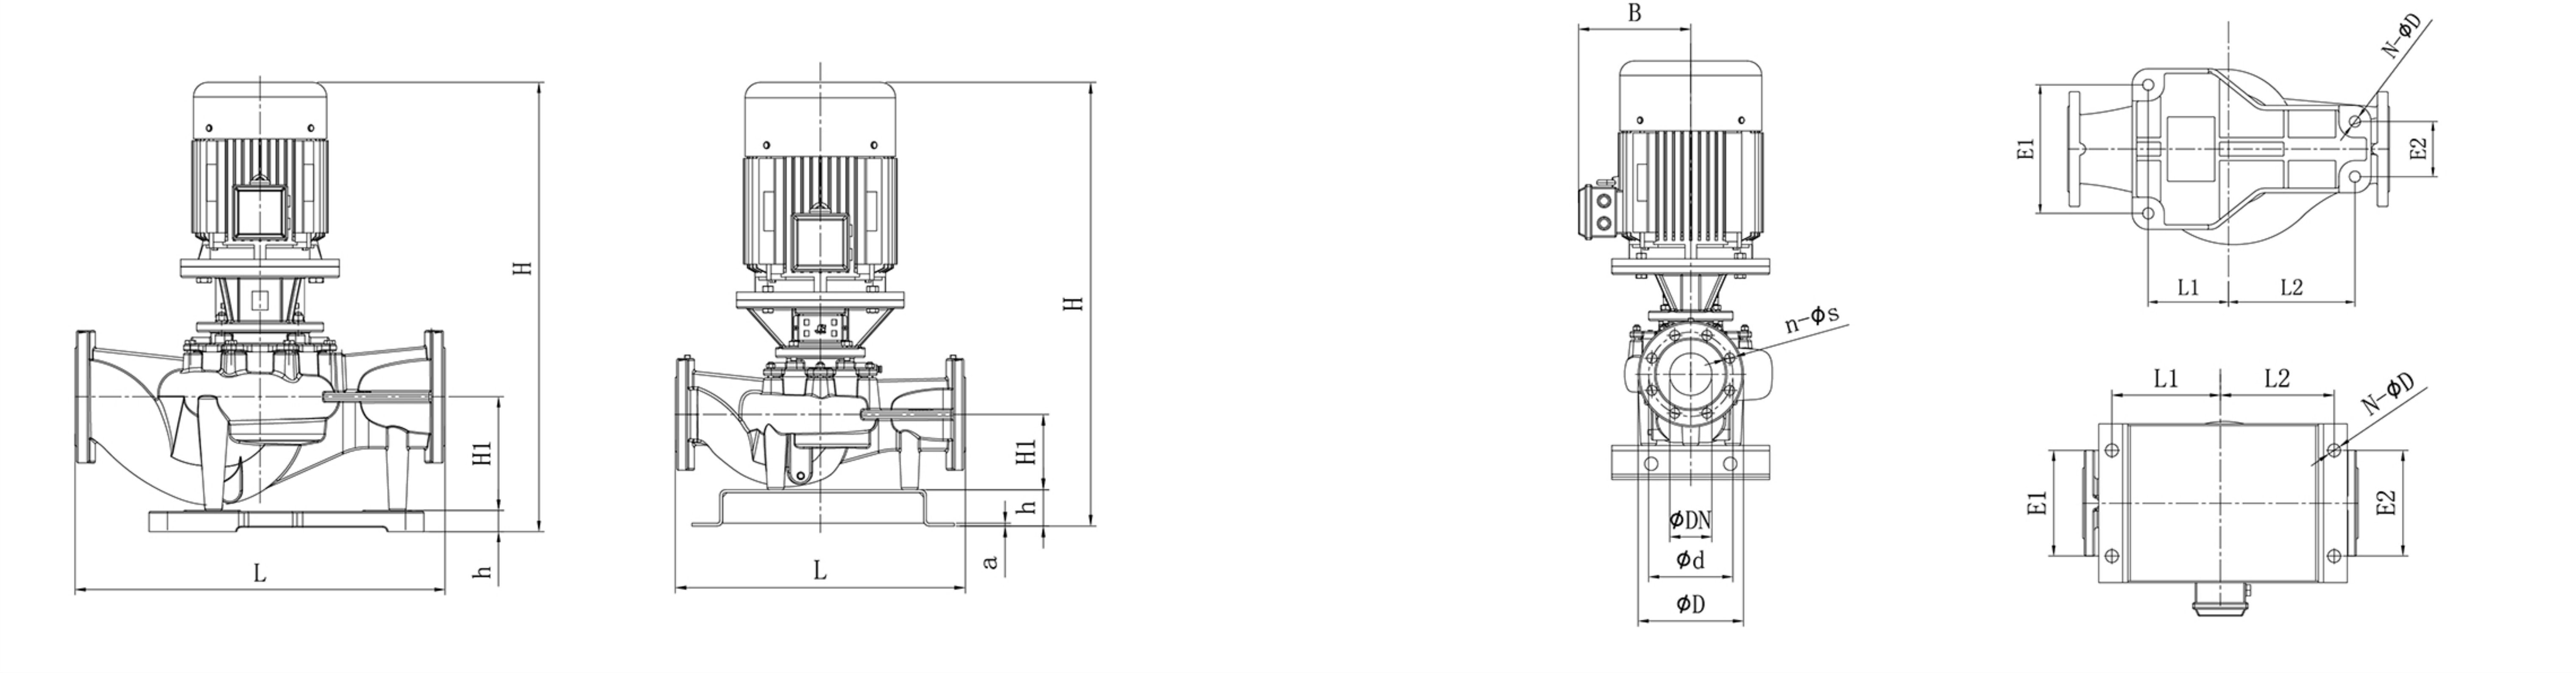

规格型号 Specifications & Models	H	h	a	H1	B	P	L	L1
32-125-0.55-4	595.5	65	6	100	140	200	360	210
40-125-0.55-4	605.5	65	6	110	140	200	400	210
50-125-0.75-4	627.5	65	6	120	140	200	400	210
50-125-0.55-4	627.5	65	6	120	140	200	400	210
65-125-1.1-4	659	65	6	120	150	200	440	210
65-125-0.75-4	619	65	6	120	140	200	440	210
65-125-0.55-4	619	65	6	120	140	200	440	210
80-125-1.1-4	675	65	6	135	150	200	520	205
80-125-0.75-4	635	65	6	135	140	200	520	205
80-125-0.55-4	635	65	6	135	140	200	520	205
32-160-0.55-4	590	65	6	100	140	200	400	210
40-160-0.55-4	601	65	6	110	140	200	400	210
40-160-0.75-4	601	65	6	110	140	200	400	210
50-160-1.1-4	644	65	6	120	150	200	440	210

L2	E1	E2	N-ØD	ØD	Ød	ØDN	n-Øs	重量 Weight
210	200	200	4-Ø18	140	100	32	4-Ø19	55
210	200	200	4-Ø18	150	110	40	4-Ø19	56
210	200	200	4-Ø18	165	125	50	4-Ø19	66
210	200	200	4-Ø18	165	125	50	4-Ø19	64
210	200	200	4-Ø18	185	145	65	4-Ø19	70
210	200	200	4-Ø18	185	145	65	4-Ø19	68
210	200	200	4-Ø18	185	145	65	4-Ø19	68
215	200	200	4-Ø18	200	160	80	8-Ø19	73
215	200	200	4-Ø18	200	160	80	8-Ø19	71
215	200	200	4-Ø18	200	160	80	8-Ø19	71
210	200	200	4-Ø18	140	100	32	4-Ø19	50
210	200	200	4-Ø18	150	110	40	4-Ø19	50
210	200	200	4-Ø18	150	110	40	4-Ø19	52
210	200	200	4-Ø18	165	125	50	4-Ø19	68

规格型号 Specifications & Models	H	h	a	H1	B	P	L	L1
50-160-0.75-4	604	65	6	120	140	200	440	210
50-160-0.55-4	604	65	6	120	140	200	440	210
65-160-1.5-4	680	65	6	120	150	200	480	205
65-160-1.1-4	650	65	6	120	150	200	480	205
65-160-0.75-4	610	65	6	120	140	200	480	205
65-160-0.55-4	610	65	6	120	140	200	480	205
80-160-2.2-4	790	65	6	180	170	250	520	205
80-160-1.5-4	740	65	6	180	150	200	520	205
80-160-1.1-4	710	65	6	180	150	200	520	205
80-160-0.75-4	670	65	6	180	140	200	520	205
100-160-4-4	843	65	6	180	190	250	600	250
100-160-3-4	813	65	6	180	170	250	600	250
100-160-2.2-4	813	65	6	180	170	250	600	250
100-160-1.5-4	763	65	6	180	150	200	600	250
125-160-4-4	892	65	6	220	190	250	650	250
125-160-3-4	862	65	6	220	170	250	650	250
125-160-2.2-4	852	65	6	220	170	250	650	250
32-200-0.75-4	584	65	6	100	140	200	400	210
32-200-0.55-4	584	65	6	100	140	200	400	210
40-200-1.5-4	664	65	6	110	150	200	400	210
40-200-1.1-4	634	65	6	110	150	200	400	210
40-200-0.75-4	594	65	6	110	140	200	400	210
40-200-0.55-4	594	65	6	110	140	200	400	210
50-200-2.2-4	744	65	6	135	170	250	440	205
50-200-1.5-4	694	65	6	135	150	200	440	205
50-200-1.1-4	664	65	6	135	150	200	440	205
50-200-0.75-4	624	65	6	135	140	200	440	205
65-200-3-4	738.5	65	6	135	170	250	480	205
65-200-2.2-4	738.5	65	6	135	170	250	480	205
65-200-1.5-4	688.5	65	6	135	150	200	480	205
65-200-1.1-4	658.5	65	6	135	150	200	480	205
80-200-4-4	785.5	65	6	145	190	250	520	250
80-200-3-4	755.5	65	6	145	170	250	520	250
80-200-2.2-4	755.5	65	6	145	170	250	520	250
80-200-1.5-4	705.5	65	6	145	150	200	520	250

L2	E1	E2	N-ØD	ØD	Ød	ØDN	n-Øs	重量 Weight
210	200	200	4-Ø18	165	125	50	4-Ø19	66
210	200	200	4-Ø18	165	125	50	4-Ø19	66
215	200	200	4-Ø18	185	145	65	4-Ø19	75
215	200	200	4-Ø18	185	145	65	4-Ø19	72
215	200	200	4-Ø18	185	145	65	4-Ø19	70
215	200	200	4-Ø18	185	145	65	4-Ø19	70
215	200	200	4-Ø18	200	160	80	8-Ø19	95
215	200	200	4-Ø18	200	160	80	8-Ø19	86
215	200	200	4-Ø18	200	160	80	8-Ø19	83
215	200	200	4-Ø18	200	160	80	8-Ø19	81
250	200	200	4-Ø18	220	180	100	8-Ø19	111
250	200	200	4-Ø18	220	180	100	8-Ø19	105
250	200	200	4-Ø18	220	180	100	8-Ø19	101
250	200	200	4-Ø18	220	180	100	8-Ø19	93
250	200	200	4-Ø18	250	210	125	8-Ø19	137
250	200	200	4-Ø18	250	210	125	8-Ø19	132
250	200	200	4-Ø18	250	210	125	8-Ø19	128
210	200	200	4-Ø18	140	100	32	4-Ø19	65
210	200	200	4-Ø18	140	100	32	4-Ø19	62
210	200	200	4-Ø18	150	110	40	4-Ø19	68
210	200	200	4-Ø18	150	110	40	4-Ø19	64
210	200	200	4-Ø18	150	110	40	4-Ø19	63
210	200	200	4-Ø18	150	110	40	4-Ø19	62
215	200	200	4-Ø18	165	125	50	4-Ø19	89
215	200	200	4-Ø18	165	125	50	4-Ø19	74
215	200	200	4-Ø18	165	125	50	4-Ø19	70
215	200	200	4-Ø18	165	125	50	4-Ø19	68
215	200	200	4-Ø18	185	145	65	4-Ø19	93
215	200	200	4-Ø18	185	145	65	4-Ø19	86
215	200	200	4-Ø18	185	145	65	4-Ø19	81
215	200	200	4-Ø18	185	145	65	4-Ø19	78
250	200	200	4-Ø18	200	160	80	8-Ø19	103
250	200	200	4-Ø18	200	160	80	8-Ø19	96
250	200	200	4-Ø18	200	160	80	8-Ø19	89
250	200	200	4-Ø18	200	160	80	8-Ø19	85

规格型号 Specifications & Models	H	h	a	H1	B	P	L	L1
100-200-7.5-4	889.5	65	6	180	210	300	600	235
100-200-5.5-4	854.5	65	6	180	210	300	600	235
100-200-4-4	834.5	65	6	180	190	250	600	235
100-200-3-4	804.5	65	6	180	170	250	600	235
100-200-2.2-4	804.5	65	6	180	170	250	600	235
125-200-9.2-4	915.5	40	\	215	210	300	700	173
125-200-7.5-4	915.5	40	\	215	210	300	700	173
125-200-5.5-4	880.5	40	\	215	210	300	700	173
125-200-4-4	860.5	40	\	215	190	250	700	173
150-200-15-4	1101	40	\	230	260	350	800	175
150-200-11-4	1056	40	\	230	260	350	800	175
150-200-9.2-4	929.5	40	\	230	210	300	800	175
150-200-7.5-4	929.5	40	\	230	210	300	800	175
150-200-5.5-4	894.5	40	\	230	210	300	800	175
200-200-15-4	1169.5	40	\	280	260	350	1000	185
200-200-11-4	1124.5	40	\	280	260	350	1000	185
200-200-9.2-4	998	40	\	280	210	300	1000	185
200-200-7.5-4	998	40	\	280	210	300	1000	185
200-250-15-4	1180	40	\	300	260	350	1000	185
200-250-18.5-4	1265	40	\	300	280	350	1000	185
200-250-22-4	1265	40	\	300	280	350	1000	185
200-250-30-4	1285	40	\	300	305	400	1000	185
200-250-37-4	1330	40	\	300	335	450	1000	185
32-250-1.5-4	664	65	6	110	150	200	440	205
32-250-1.1-4	634	65	6	110	150	200	440	205
32-250-0.75-4	594	65	6	110	140	200	440	205
40-250-2.2-4	714	65	6	110	170	250	440	205
40-250-1.5-4	664	65	6	110	150	200	440	205
40-250-1.1-4	634	65	6	110	150	200	440	205
40-250-0.75-4	594	65	6	110	140	200	440	205
50-250-3-4	728	65	6	120	170	250	480	205
50-250-2.2-4	728	65	6	120	170	250	480	205
50-250-1.5-4	678	65	6	120	150	200	480	205
65-250-4-4	771.5	65	6	135	190	250	520	250
65-250-3-4	741.5	65	6	135	170	250	520	250

L2	E1	E2	N-ØD	ØD	Ød	ØDN	n-Øs	重量 Weight
265	200	200	4-Ø18	220	180	100	8-Ø19	154
265	200	200	4-Ø18	220	180	100	8-Ø19	149
265	200	200	4-Ø18	220	180	100	8-Ø19	122
265	200	200	4-Ø18	220	180	100	8-Ø19	115
265	200	200	4-Ø18	220	180	100	8-Ø19	108
277	280	120	4-Ø24	250	210	125	8-Ø19	166
277	280	120	4-Ø24	250	210	125	8-Ø19	166
277	280	120	4-Ø24	250	210	125	8-Ø19	161
277	280	120	4-Ø24	250	210	125	8-Ø19	145
275	280	120	4-Ø24	285	240	150	8-Ø23	272
275	280	120	4-Ø24	285	240	150	8-Ø23	264
275	280	120	4-Ø24	285	240	150	8-Ø23	221
275	280	120	4-Ø24	285	240	150	8-Ø23	221
275	280	120	4-Ø24	285	240	150	8-Ø23	216
365	330	120	4-Ø24	340	295	200	12-Ø23	340
365	330	120	4-Ø24	340	295	200	12-Ø23	332
365	330	120	4-Ø24	340	295	200	12-Ø23	288
365	330	120	4-Ø24	340	295	200	12-Ø23	288
365	330	120	4-Ø24	340	295	200	12-Ø23	395
365	330	120	4-Ø24	340	295	200	12-Ø23	432
365	330	120	4-Ø24	340	295	200	12-Ø23	453
365	330	120	4-Ø24	340	295	200	12-Ø23	540
365	330	120	4-Ø24	340	295	200	12-Ø23	572
215	200	200	4-Ø18	140	100	32	4-Ø19	65
215	200	200	4-Ø18	140	100	32	4-Ø19	61
215	200	200	4-Ø18	140	100	32	4-Ø19	59
215	200	200	4-Ø18	150	110	40	4-Ø19	74
215	200	200	4-Ø18	150	110	40	4-Ø19	66
215	200	200	4-Ø18	150	110	40	4-Ø19	62
215	200	200	4-Ø18	150	110	40	4-Ø19	60
215	200	200	4-Ø18	165	125	50	4-Ø19	88
215	200	200	4-Ø18	165	125	50	4-Ø19	84
215	200	200	4-Ø18	165	125	50	4-Ø19	75
250	200	200	4-Ø18	185	145	65	4-Ø19	98
250	200	200	4-Ø18	185	145	65	4-Ø19	93

规格型号 Specifications & Models	H	h	a	H1	B	P	L	L1
65-250-2.2-4	741.5	65	6	135	170	250	520	250
80-250-7.5-4	882	40	\	185	210	300	600	225
80-250-5.5-4	847	40	\	185	210	300	600	225
80-250-4-4	827	40	\	185	190	250	600	225
80-250-3-4	797	40	\	185	170	250	600	225
100-250-11-4	1000	40	\	180	260	350	650	225
100-250-9.2-4	873.5	40	\	180	210	300	650	225
100-250-7.5-4	873.5	40	\	180	210	300	650	225
100-250-5.5-4	838.5	40	\	180	210	300	650	225
125-250-18.5-4	1171	40	\	215	280	350	750	175
125-250-15-4	1086	40	\	215	260	350	750	175
125-250-11-4	1041	40	\	215	260	350	750	175
125-250-9.2-4	914.5	40	\	215	210	300	750	175
125-250-7.5-4	914.5	40	\	215	210	300	750	175
150-250-22-4	1186	40	\	230	280	350	800	175
150-250-18.5-4	1186	40	\	230	280	350	800	175
150-250-15-4	1101	40	\	230	260	350	800	175
150-250-11-4	1056	40	\	230	260	350	800	175
50-315-7.5-4	894	65	6	180	210	300	560	250
50-315-5.5-4	859	65	6	180	210	300	560	250
50-315-4-4	839	65	6	180	190	250	560	250
50-315-3-4	809	65	6	180	170	250	560	250
65-315-9.2-4	894	40	\	205	210	300	600	225
65-315-7.5-4	894	40	\	205	210	300	600	225
65-315-5.5-4	859	40	\	205	210	300	600	225
65-315-4-4	839	40	\	205	190	250	600	225
80-315-15-4	1063	40	\	205	260	350	650	225
80-315-11-4	1018	40	\	205	260	350	650	225
80-315-9.2-4	896.5	40	\	205	210	300	650	225
80-315-7.5-4	896.5	40	\	205	210	300	650	225
80-315-5.5-4	861.5	40	\	205	210	300	650	225
100-315-22-4	1148	40	\	205	280	350	750	175
100-315-18.5-4	1148	40	\	205	280	350	750	175
100-315-15-4	1063	40	\	205	260	350	750	175
100-315-11-4	1018	40	\	205	260	350	750	175

L2	E1	E2	N-ØD	ØD	Ød	ØDN	n-Øs	重量 Weight
250	200	200	4-Ø18	185	145	65	4-Ø19	89
225	280	120	4-Ø24	200	160	80	8-Ø19	161
225	280	120	4-Ø24	200	160	80	8-Ø19	158
225	280	120	4-Ø24	200	160	80	8-Ø19	131
225	280	120	4-Ø24	200	160	80	8-Ø19	125
225	280	120	4-Ø24	220	180	100	8-Ø19	262
225	280	120	4-Ø24	220	180	100	8-Ø19	190
225	280	120	4-Ø24	220	180	100	8-Ø19	178
225	280	120	4-Ø24	220	180	100	8-Ø19	175
275	280	120	4-Ø24	250	210	125	8-Ø19	323
275	280	120	4-Ø24	250	210	125	8-Ø19	287
275	280	120	4-Ø24	250	210	125	8-Ø19	270
275	280	120	4-Ø24	250	210	125	8-Ø19	209
275	280	120	4-Ø24	250	210	125	8-Ø19	187
275	280	120	4-Ø24	285	240	150	8-Ø23	367
275	280	120	4-Ø24	285	240	150	8-Ø23	46
275	280	120	4-Ø24	285	240	150	8-Ø23	310
275	280	120	4-Ø24	285	240	150	8-Ø23	293
250	200	200	4-Ø18	165	125	50	4-Ø19	159
250	200	200	4-Ø18	165	125	50	4-Ø19	156
250	200	200	4-Ø18	165	125	50	4-Ø19	129
250	200	200	4-Ø18	165	125	50	4-Ø19	124
225	280	120	4-Ø24	185	145	65	4-Ø19	179
225	280	120	4-Ø24	185	145	65	4-Ø19	167
225	280	120	4-Ø24	185	145	65	4-Ø19	164
225	280	120	4-Ø24	185	145	65	4-Ø19	136
225	280	120	4-Ø24	200	160	80	8-Ø19	292
225	280	120	4-Ø24	200	160	80	8-Ø19	275
225	280	120	4-Ø24	200	160	80	8-Ø19	206
225	280	120	4-Ø24	200	160	80	8-Ø19	194
225	280	120	4-Ø24	200	160	80	8-Ø19	191
275	280	120	4-Ø24	220	180	100	8-Ø19	328
275	280	120	4-Ø24	220	180	100	8-Ø19	264
275	280	120	4-Ø24	220	180	100	8-Ø19	250
275	280	120	4-Ø24	220	180	100	8-Ø19	242

规格型号 Specifications & Models	H	h	a	H1	B	P	L	L1
125-315-30-4	1168	40	\	205	305	400	850	175
125-315-22-4	1148	40	\	205	280	350	850	175
125-315-18.5-4	1148	40	\	205	280	350	850	175
125-315-15-4	1063	40	\	205	260	350	850	175
150-315-45-4	1287	40	\	230	335	450	850	275
150-315-37-4	1252	40	\	230	335	450	850	275
150-315-30-4	1207	40	\	230	305	400	850	275
150-315-22-4	1187	40	\	230	280	350	850	275
150-315-18.5-4	1187	40	\	230	280	350	850	275
200-315-75-4	1492	40	\	280	410	550	1050	275
200-315-55-4	1432	40	\	280	370	550	1050	275
200-315-45-4	1362	40	\	280	335	450	1050	275
200-315-37-4	1327	40	\	280	335	450	1050	275
200-315-30-4	1282	40	\	280	305	400	1050	275
100-400-45-4	1246	40	\	205	335	450	850	175
100-400-37-4	1211	40	\	205	335	450	850	175
100-400-30-4	1166	40	\	205	305	400	850	175
100-400-22-4	1146	40	\	205	280	350	850	175
100-400-18.5-4	1146	40	\	205	280	350	850	175
125-400-75-4	1405	40	\	230	410	550	900	275
125-400-55-4	1345	40	\	230	370	550	900	275
125-400-45-4	1275	40	\	230	335	450	900	275
125-400-37-4	1240	40	\	230	335	450	900	275
125-400-30-4	1195	40	\	230	305	400	900	275
125-400-22-4	1175	40	\	230	280	350	900	275
150-400-90-4	1501	40	\	260	410	550	1000	275
150-400-75-4	1451	40	\	260	410	550	1000	275
150-400-55-4	1391	40	\	260	370	550	1000	275
150-400-45-4	1321	40	\	260	335	450	1000	275
150-400-37-4	1286	40	\	260	335	450	1000	275
200-400-132-4	1838	40	\	280	535	660	1100	275
200-400-110-4	1728	40	\	280	535	660	1100	275
200-400-90-4	1528	40	\	280	410	550	1100	275
200-400-75-4	1478	40	\	280	410	550	1100	275
200-400-55-4	1418	40	\	280	370	550	1100	275

L2	E1	E2	N-ØD	ØD	Ød	ØDN	n-Øs	重量 Weight
275	280	120	4-Ø24	250	210	125	8-Ø19	478
275	280	120	4-Ø24	250	210	125	8-Ø19	386
275	280	120	4-Ø24	250	210	125	8-Ø19	365
275	280	120	4-Ø24	250	210	125	8-Ø19	329
275	330	120	4-Ø24	285	240	150	8-Ø23	545
275	330	120	4-Ø24	285	240	150	8-Ø23	493
275	330	120	4-Ø24	285	240	150	8-Ø23	469
275	330	120	4-Ø24	285	240	150	8-Ø23	376
275	330	120	4-Ø24	285	240	150	8-Ø23	312
275	330	120	4-Ø24	340	295	200	12-Ø23	909
275	330	120	4-Ø24	340	295	200	12-Ø23	727
275	330	120	4-Ø24	340	295	200	12-Ø23	628
275	330	120	4-Ø24	340	295	200	12-Ø23	607
275	330	120	4-Ø24	340	295	200	12-Ø23	576
275	280	120	4-Ø24	220	180	100	8-Ø19	568
275	280	120	4-Ø24	220	180	100	8-Ø19	547
275	280	120	4-Ø24	220	180	100	8-Ø19	516
275	280	120	4-Ø24	220	180	100	8-Ø19	428
275	280	120	4-Ø24	220	180	100	8-Ø19	407
275	330	120	4-Ø24	250	210	125	8-Ø19	874
275	330	120	4-Ø24	250	210	125	8-Ø19	692
275	330	120	4-Ø24	250	210	125	8-Ø19	588
275	330	120	4-Ø24	250	210	125	8-Ø19	567
275	330	120	4-Ø24	250	210	125	8-Ø19	536
275	330	120	4-Ø24	250	210	125	8-Ø19	448
275	330	120	4-Ø24	285	240	150	8-Ø23	963
275	330	120	4-Ø24	285	240	150	8-Ø23	922
275	330	120	4-Ø24	285	240	150	8-Ø23	740
275	330	120	4-Ø24	285	240	150	8-Ø23	641
275	330	120	4-Ø24	285	240	150	8-Ø23	620
275	330	120	4-Ø24	340	295	200	12-Ø23	1518
275	330	120	4-Ø24	340	295	200	12-Ø23	1421
275	330	120	4-Ø24	340	295	200	12-Ø23	1014
275	330	120	4-Ø24	340	295	200	12-Ø23	973
275	330	120	4-Ø24	340	295	200	12-Ø23	791

售后服务 / After-sales Service

熊猫集团致力于构筑全面、完善、快速反应的营销服务网络，全国范围布局8大生产研发基地，通过360个售后服务网点向每一位客户提供七星级服务，荣获五星级售后服务认证及十二星级服务能力持续有效验证证书等荣誉。

Panda Group is committed to building a comprehensive, complete and fast-response marketing service network. It has 8 major production and R&D bases across the country, and provides seven-star service to every customer through 360 after-sales service outlets. It has won honors such as five-star after-sales service certification and twelve-star service capability continuous and effective verification certificate.

slogan

用心做好每件事 真诚服务每一天

Keep working with heart and serving sincerely



67个区域

备品备件库

67 Regional Spare
Parts Warehouses

360+个

维保网点

360+ Maintenance
Outlets

市区1-2小时

到达现场

Take 1-2 hours to arrive
at the scene in the city

郊区4-8小时

到达现场

Take 4-8 hours to arrive
at the scene in the suburbs

熊猫, 让供水更安全, 更简单!

Panda,
Make water supply safer and simpler!

